

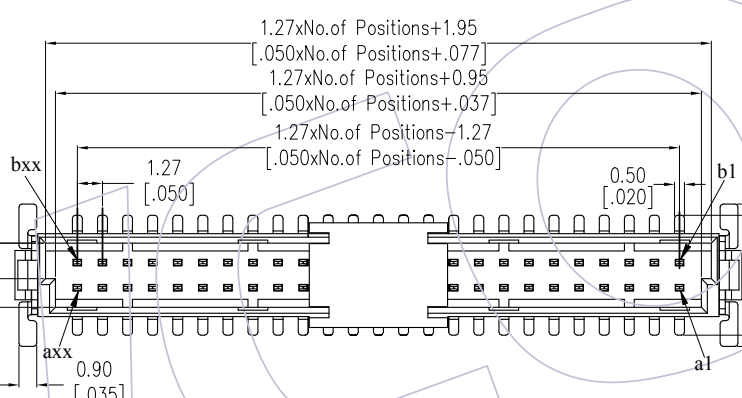


HSF

NOTES:
 Rated Current: 0.5~1.0 AMP. Δ
 Contact Resistance: 25m Ω Max.
 Withstand Voltage: 500V
 Insulation Resistance: 10000M Ω Min.
 Operation Temperature: -55 $^{\circ}$ C to +125 $^{\circ}$ C
 Contact Material: Copper Alloy
 Contact Plating: Sn and Au over Ni
 Tail Material: Copper Alloy
 Tail Plating: Sn over Ni
 Main Body Material: High Temperature Thermoplastic(UL94V-0)
 CAP Material: High Temperature Thermoplastic(UL94V-0)

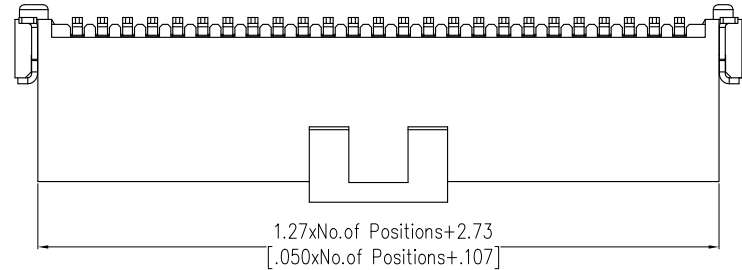

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE \pm 0.05)

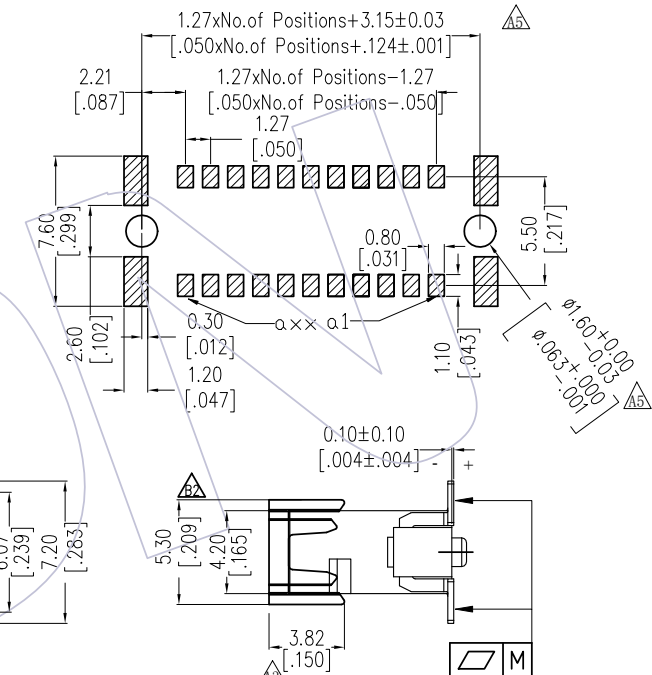

Ordering Information

3910- P XXX - 082 M XX W R 1 W


No. of Pins
 010: 10 Pin
 020: 20 Pin
 100: 100 Pin

Plating Δ
 S3=Sel.10U" Gold/Tin
 S4=Sel.15U" Gold/Tin
 S5=Sel.30U" Gold/Tin

Package R: Tape & Reel
 Blank=W/O WCON
 W=W/T WCON

"XX"=P/2

PIN	M	P/N	HOUSING PIN	DIM A
10~40PIN	0.12	CAP3910-G201	10-24	7.00
42~100PIN	0.15	CAP3910-G202	26-100	16.00

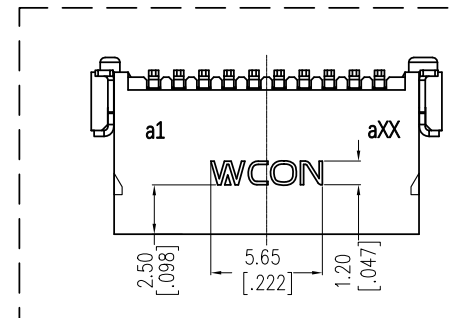

Δ LOGO左右居中

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.
B2	2021/01/06	Modify CAP	XSR	OPERATION	DRAW	2021/01/06	1:1	3910-PXXX-082MXXWR1(W) Δ
B1	2020/11/12	Add W/T WCON LOGO SPEC&P/N	XSR	x.x \pm 0.40	XSR		UNIT	TITLE: 1.27mm Pitch SDC CONNECTORS MALE "E" TYPE H=8.20mm(TYPE Q)
B0	2019/12/12	Modify	XSR	x.xx \pm 0.25 x.xxx \pm 0.15	CHECK	DATE	SIZE	
A0	2017/08/28	NEW		Angle \pm 3'	APPROVE	DATE	SHEET	Customer NO.
				DIM TOL			PROJ.	

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com