

HSF


NOTES:

- Current Rating: 0.5AMP
- Contact Resistance: 60mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 100MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

3621-P XXX - XXX XX X 01

- No. of Pins
- Housing High
- Contact Plating
- Plug=H1
- Socket=H2
- G0=Gold Flash
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- T=Tube
- P=Tube+CAP
- R=Tape&Reel

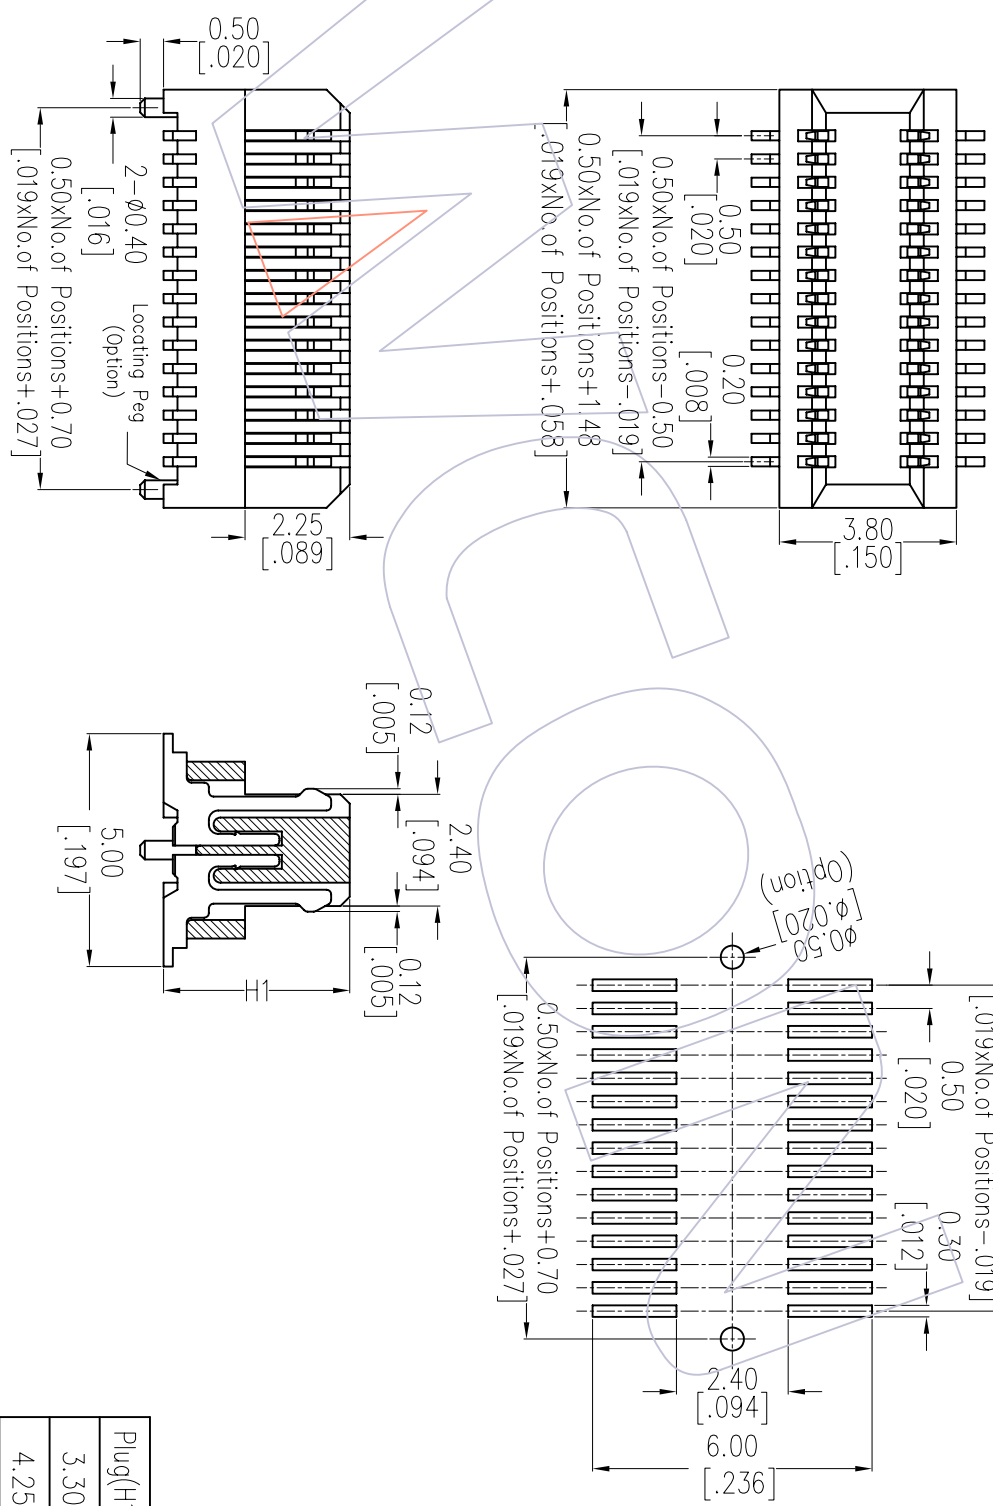

Recommended P.C.B. Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

| | |
|----------|------|
| Plug(H1) | 5.70 |
| | 4.25 |
| | 3.30 |

| | | | | | | | | | | | | |
|-----|------------|--------------------------|--------|-----------|---------|------------|-------|-----|--------------------|--|------------------------|------------------------|
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. | TITLE: | WCON-Dongguan | WCON-Kunshan |
| A0 | 2012/11/22 | NEW | | X.X | JYHuang | 2012/11/22 | mm | A4 | 3621-PXXX-XXXXXX01 | 0.50mm B0 T0 B0 PLUG CONN BOX DUAL SLOTS | +86 769 85358920 | +86 512 57468408 |
| | | | | X.XXX | CHECK | DATE | SHEET | 1/1 | | Customer NO. | +86 769 85358915 | +86 512 57468468 |
| | | | | Angle | APPROVE | DATE | PROJ. | | | | E-mail: sales@wcon.com | E-mail: sales@wcon.com |
| | | | | ± 3' | | | | | | | | |
| | | | | DIM | TOL | | | | | | | |

WCON

Http: www.wcon.com

Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com