

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:

Current Rating: 3.0AMP
Contact Resistance:30mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ
Operation Temperature:-55℃~+105℃

Contact Material: Brass
Contact Plating: Au and Sn over Ni
Fixing Material: Phosphor Bronze
Fixing Plating: Sn over Ni
Insulation Material: PBT+30% G.F(UL94V-0)

Ordering Information

3410-3 XX X MS SX X A X

No. of Pins Per Row
10pin
16pin
32pin


Rows with contacts
A=a+b+c
B=a+b
C=a+c
D=a

Contact Plating:
S0=Gold Flash/Tin
S1=3u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tim

Packing:
A=Tray

DIP length
1:L=2.50
2:L=3.00
3:L=4.00
4:L=4.57

W=With Lock
N=Without Lock

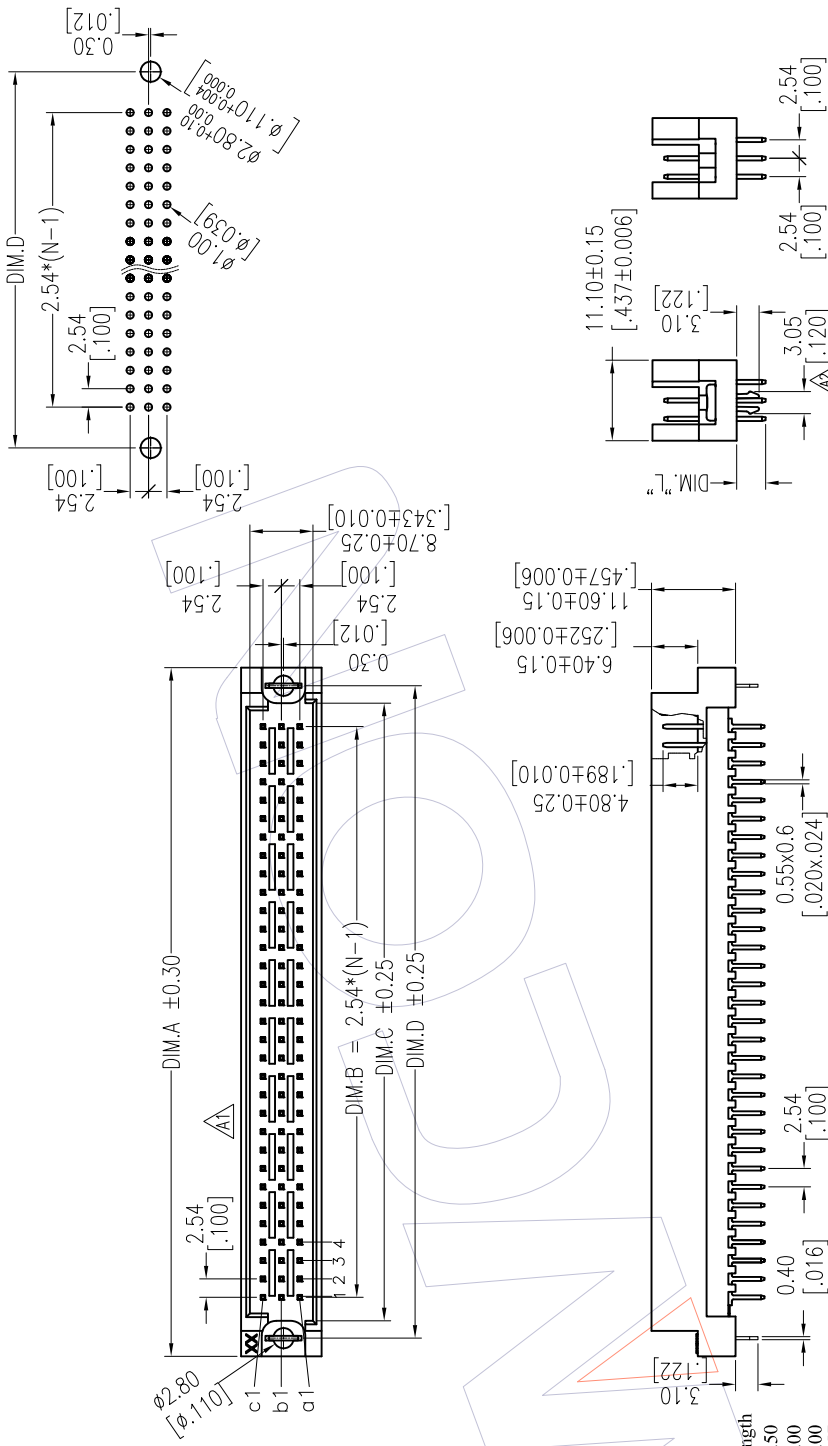

W:With Lock

N:Without Lock

R	96	3	32	95.00	78.74	85.20	90.00
R/2	48	3	16	54.40	38.10	44.60	50.00
R/3	30	3	10	39.16	22.86	29.30	34.76
TYPE	POS.	ROWS	N	DIM.A	DIM.B	DIM.C	DIM.D

PART NO.		3410-3XXXMSXXAX	
DRAW		JYHuang	
DATE		2014/08/12	
OPERATION		X.X ±0.40	
SCALE		mm inch	
FIT		A4	
UNIT		1/1	
SIZE		2.54PITCH DIN 41612	
SHEET		Male 180° DIP (R-Type)	
PROJ.		Customer NO.	
CHECK		APPROVE	
DATE		DATE	
CHANGE		DESCRIPTION	
DATE		DATE	
TITLE:		3410-3XXXMSXXAX	
Customer NO.		WCON-Dongguan	
WCON-Kunshan		Http: www.wcon.com	
Tel: +86 769 8535892		Tel: +86 512 57468408	
Fax: +86 769 8535891		Fax: +86 512 57468468	
E-mail: sales@wcon.com		E-mail: sales@wcon.com	

WCON

WCON-Dongguan
WCON-Kunshan
Http: www.wcon.com
Tel: +86 769 8535892
Tel: +86 512 57468408
Fax: +86 769 8535891
Fax: +86 512 57468468
E-mail: sales@wcon.com
E-mail: sales@wcon.com