


HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃ to +105℃

Contact Material:Phosphor Bronze
 Contact plating:Au or Sn over Ni
 Insulator Material:PA9T+33%GF UL94V-0

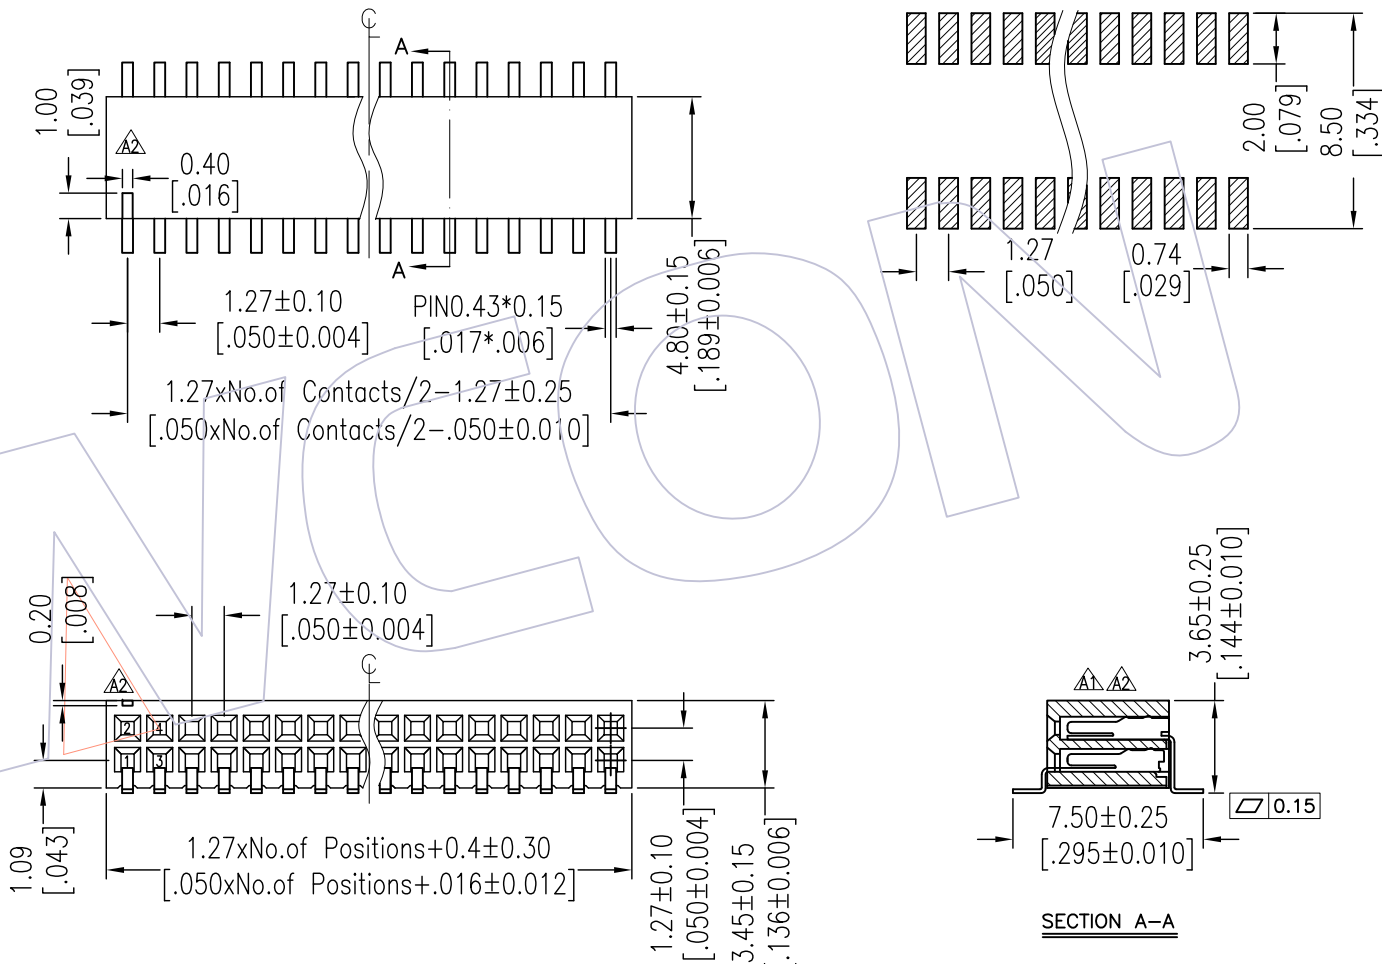

Ordering Information

2335-2 XX M XX CUN X I

No.of Pins per Row: 02-50Pin

Contact Plating:

- G0=Gold Flash
- G3=10μ"Gold
- G4=15μ"Gold
- G5=30μ"Gold
- S0=Gold Flash/Tin
- S3=10μ"Gold/Tin
- S4=15μ"Gold/Tin
- S5=30μ"Gold/Tin
- SN=Tin

Packing:

- T=Tube
- R=Tape&Reel

Item	Pitch	Mating
Standard	1.27	1310/1315/1320
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2017/04/19	Cancel Mylar,Modify plasitic	△	x.x ±0.40	Surong Xu	2017/04/19	UNIT	mm	2335-2XXMXXCUNX1
A1	2014/08/08	Modify Mylar	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: FH1.27mm DUAL SIDE INSERT SMT H=3.45
A0	2012/07/07	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM	TOL				

WCON

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com