

H S F

NOTES:

- Current Rating: 2.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%GF UL94V-0

Ordering Information


2227T-2 XX M XX CUN T X

No. of Pins per Row: 02-40pin

Contact Plating: GM=Gold Flash
G3=10μ Gold
G4=15μ Gold
G5=30μ Gold
SN=1In

Packing: T=Tube 1=Type 1
P=Tube-CAP 2=Type 2
R=Tube&Reel-CAP

Series No.

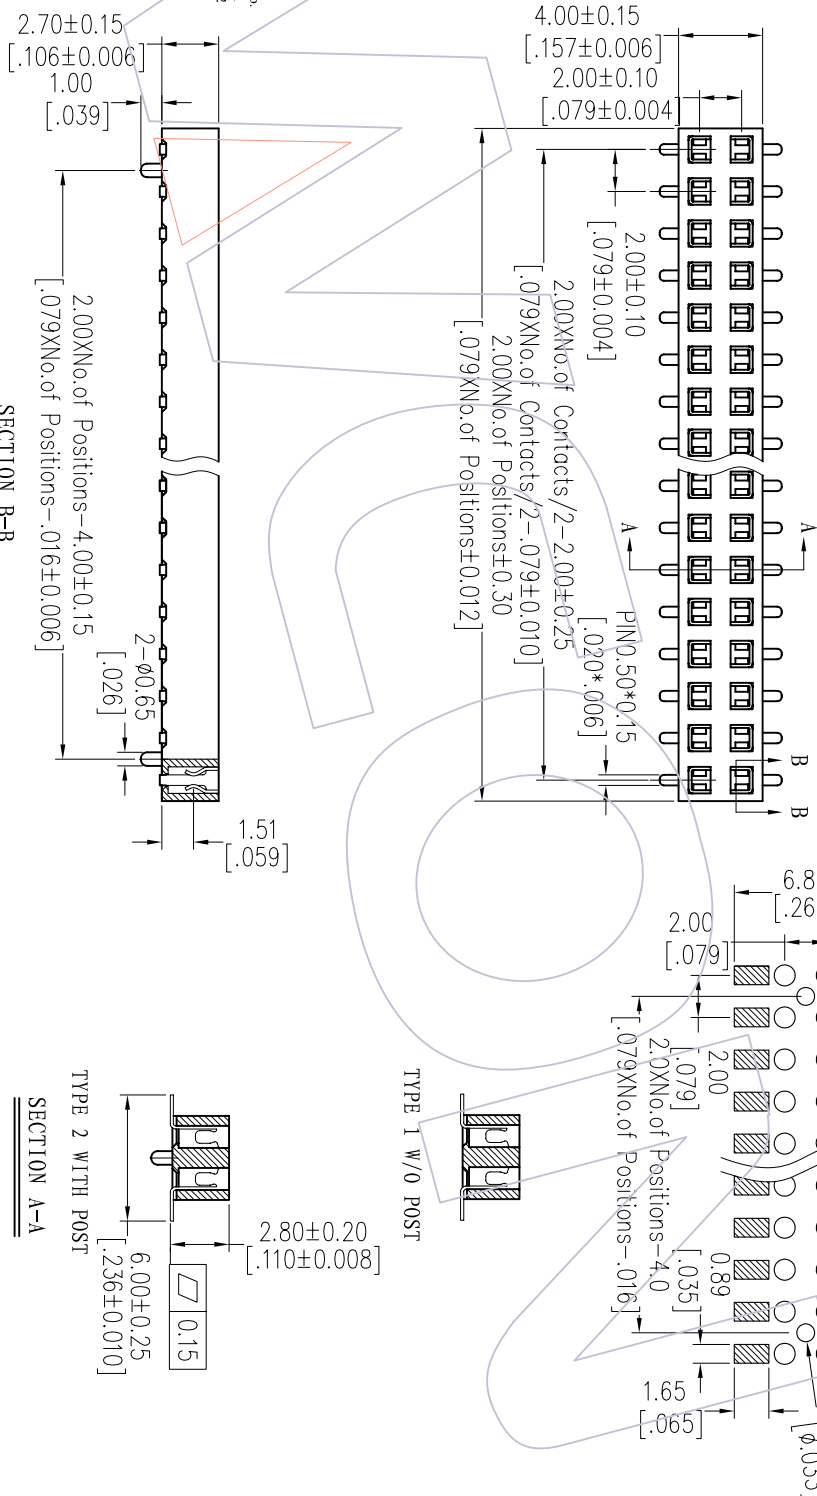

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/07/12	UNIT	mm	SBE TABLE
X.XX	CHECK	DATE	SIZE	A4	TITLE: FH2.00mm DUAL ROW 180° SMT
X.XXX	±0.15	DATE	SHEET	1/1	Customer NO.
Angle		DATE	PROJ.		

TITLE	PART NO.
TYPE 1	2227T-2XXMXXCUNT1
TYPE 2	2227T-2XXMXXCUNT2

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DATE
A0	2012/07/12	NEW			

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/07/12	UNIT	mm	SBE TABLE
X.XX	CHECK	DATE	SIZE	A4	TITLE: FH2.00mm DUAL ROW 180° SMT
X.XXX	±0.15	DATE	SHEET	1/1	Customer NO.
Angle		DATE	PROJ.		

TITLE	PART NO.
TYPE 1	2227T-2XXMXXCUNT1
TYPE 2	2227T-2XXMXXCUNT2

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com