


HSF

NOTES:

Current Rating: 1.0AMP
Contact Resistance: 30mΩ Max
Withstand Voltage: 100V AC/Minute
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +85°C

Contact Material: Phosphor Bronze
Contact plating: Au Or SM over Ni
Shell plating: Ni over Cu
Insulator Material: PBT+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

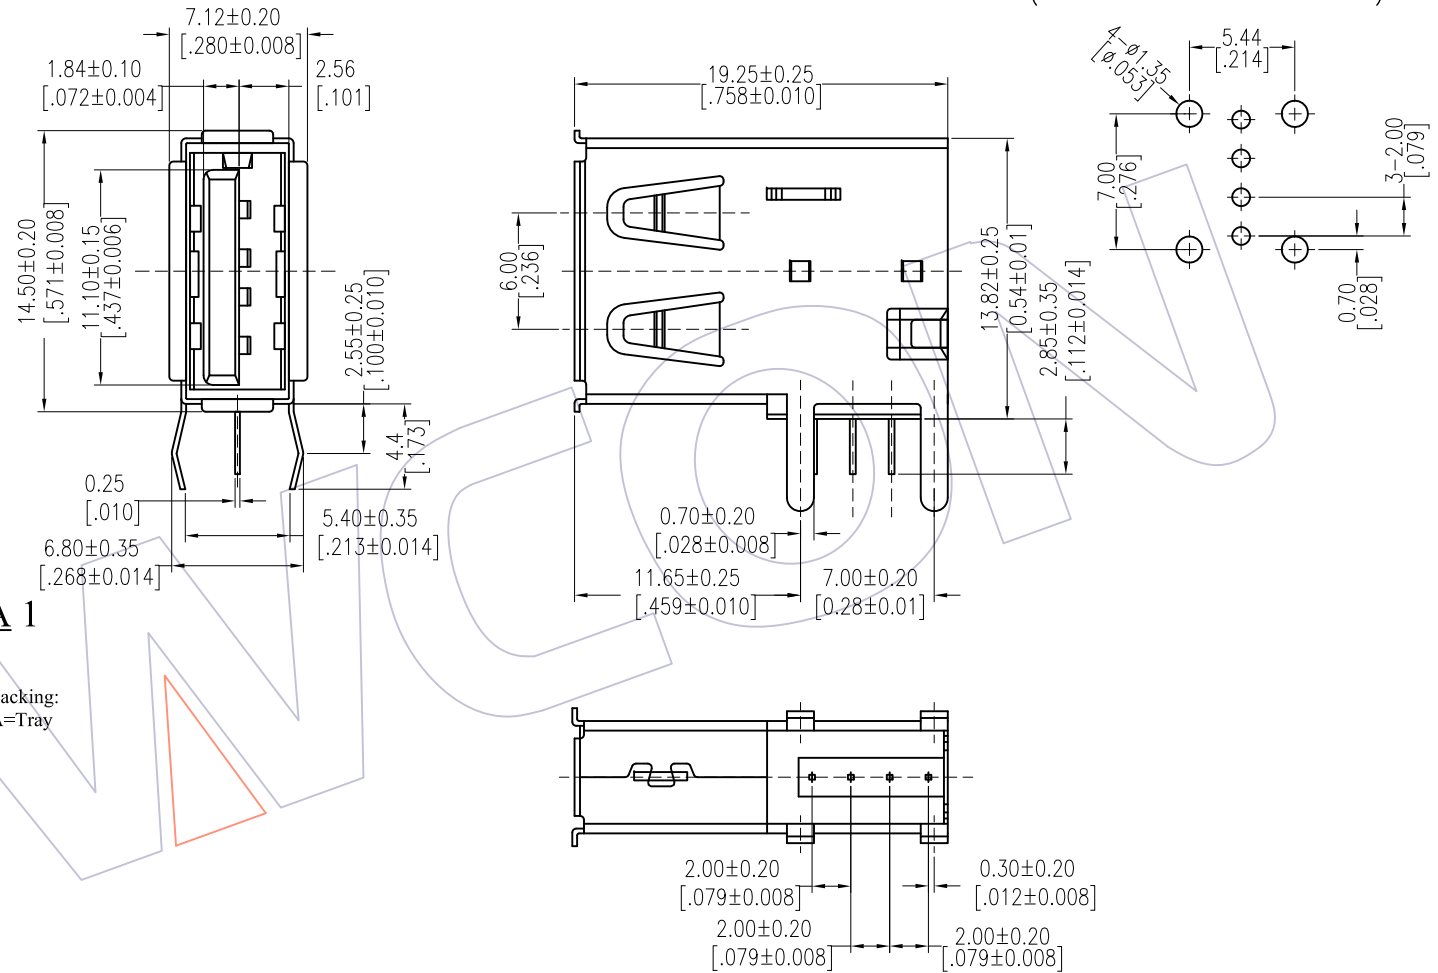

Ordering Information

6110-04 A F D D XX W N A 1

Contact Plating Δ
S0=Gold Flash/Matte Tin
S3=10u"Gold/Matte Tin
S4=15u"Gold/Matte Tin
S5=30u"Gold/Matte Tin

Insulator Color
B=Black
W=White
U=Blue

Packing:
A=Tray

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	Allen	2015/07/27	UNIT	mm	6110-04AFDDXXWNA1
A1	2015/07/27	Modify	Δ	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: USB A-TYPE 90 DIP
AO	2013/01/09	NEW	----	x.xxx ±0.15			SHEET	1/1	
				Angle ± 3'	APPROVE	DATE	PROJ.	Φ	Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com