

HSF

Notes:


- 1.Current Rating:1.5AMP
Voltage rating:30v
- 2.Contact Resistance:30mΩ max
- 3.Insulation Resistance:1000MΩ min
- 4.Dielectric Withstanding Voltage:500V AC
- 5.Temperature Rating:-20°C to +60°C

Contact Material:Brass
Shell:SPCC
Insulator Material:PA66+30% G.F(UL94V-0)

Ordering Information

6110-04 A M R Z XX X W A 1

Contact Plating: G=Gold Flash, S=Gold Flash/Matte Tin
 Insulator Color: W=White
 Packing: A=Tray
 Series No.

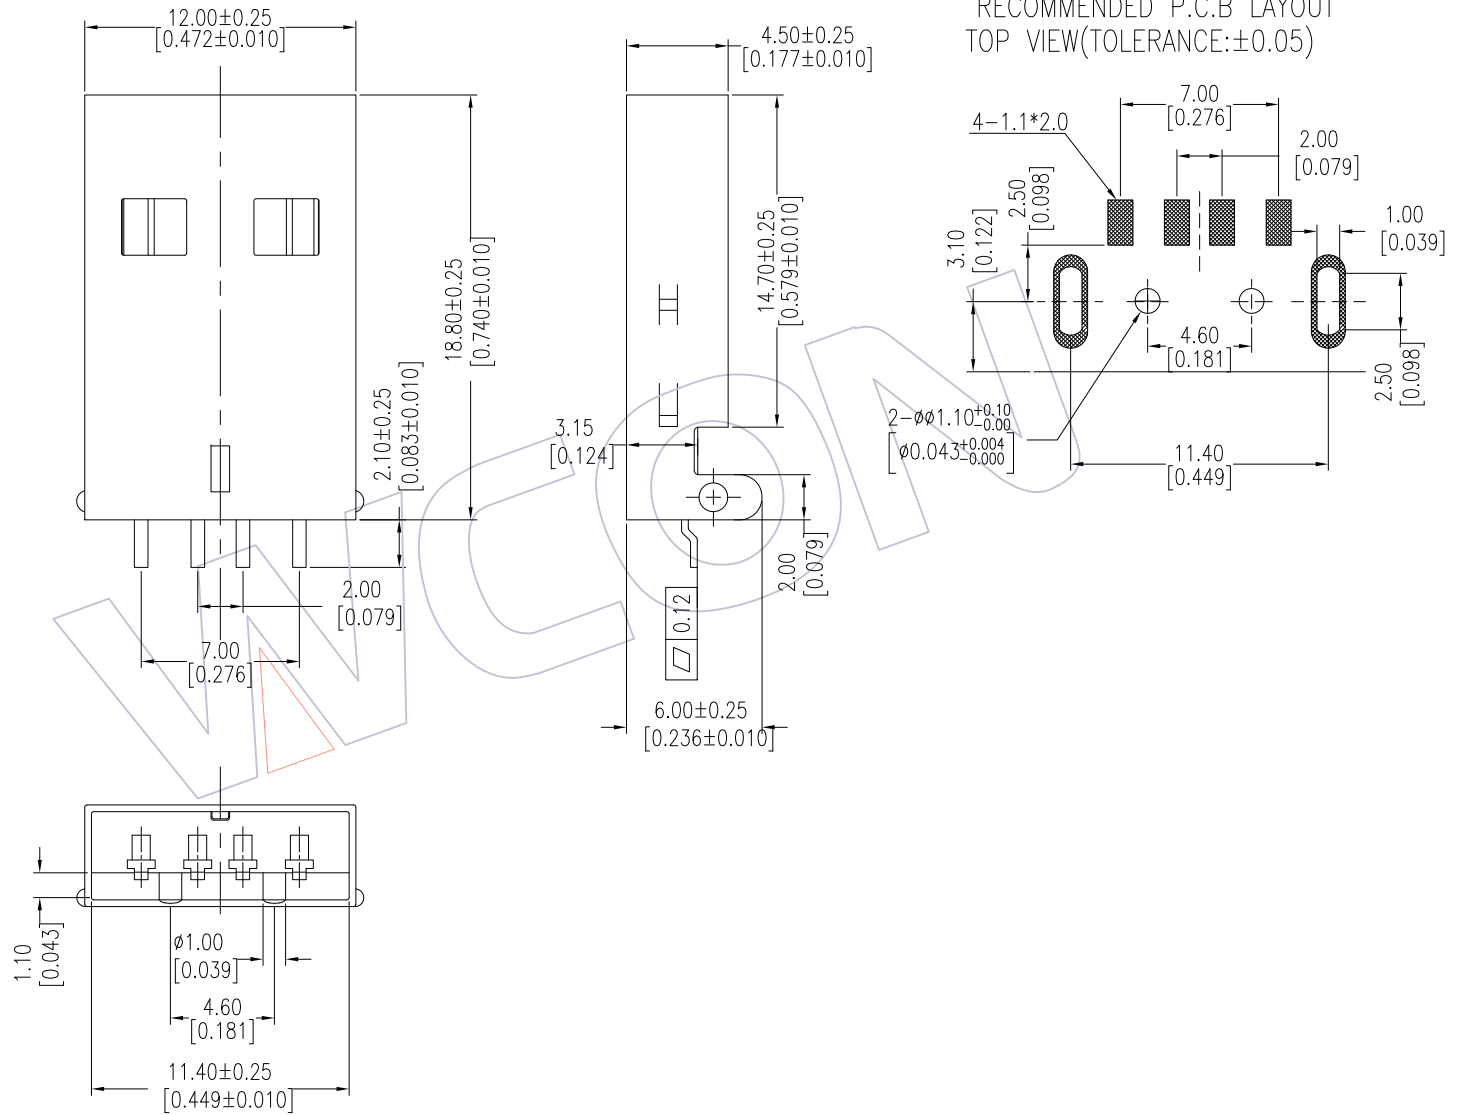

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
				X.X	±0.40					
A0	2015/07/27	Modify	△	X.XX	±0.25	Allen	2015/07/27	UNIT	mm	6110-04AMRZXXXWA1
A0	2013/12/20	NEW	—	X.XXX	±0.15	CHECK	DATE	SIZE	A4	
				Angle	± 3'	APPROVE	DATE	SHEET	1/1	TITLE: USB A-Plug SMT Short 4.5 Length 18.8
				DIM	TOL			PROJ.	⌀	Customer NO.



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com