

# HSF

**NOTES:**


Current Rating: 0.5AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PBT+30%G.F UL94V-0

## Ordering Information

5340-XX P XX B 0 X

No. of Pins      Contact Plating      Color Insulator      Series No.  
 10 30      SF=Gold Flash/Tin      B=Black      1=3.10mm  
 14 34      S3=10μ"Gold/Tin      G=Grey(427C)      2=1.90mm  
 16 40      S4=15μ"Gold/Tin      E=Grey(413C)  
 18 44      S5=30μ"Gold/Tin  
 20 50  
 24 60  
 26 80

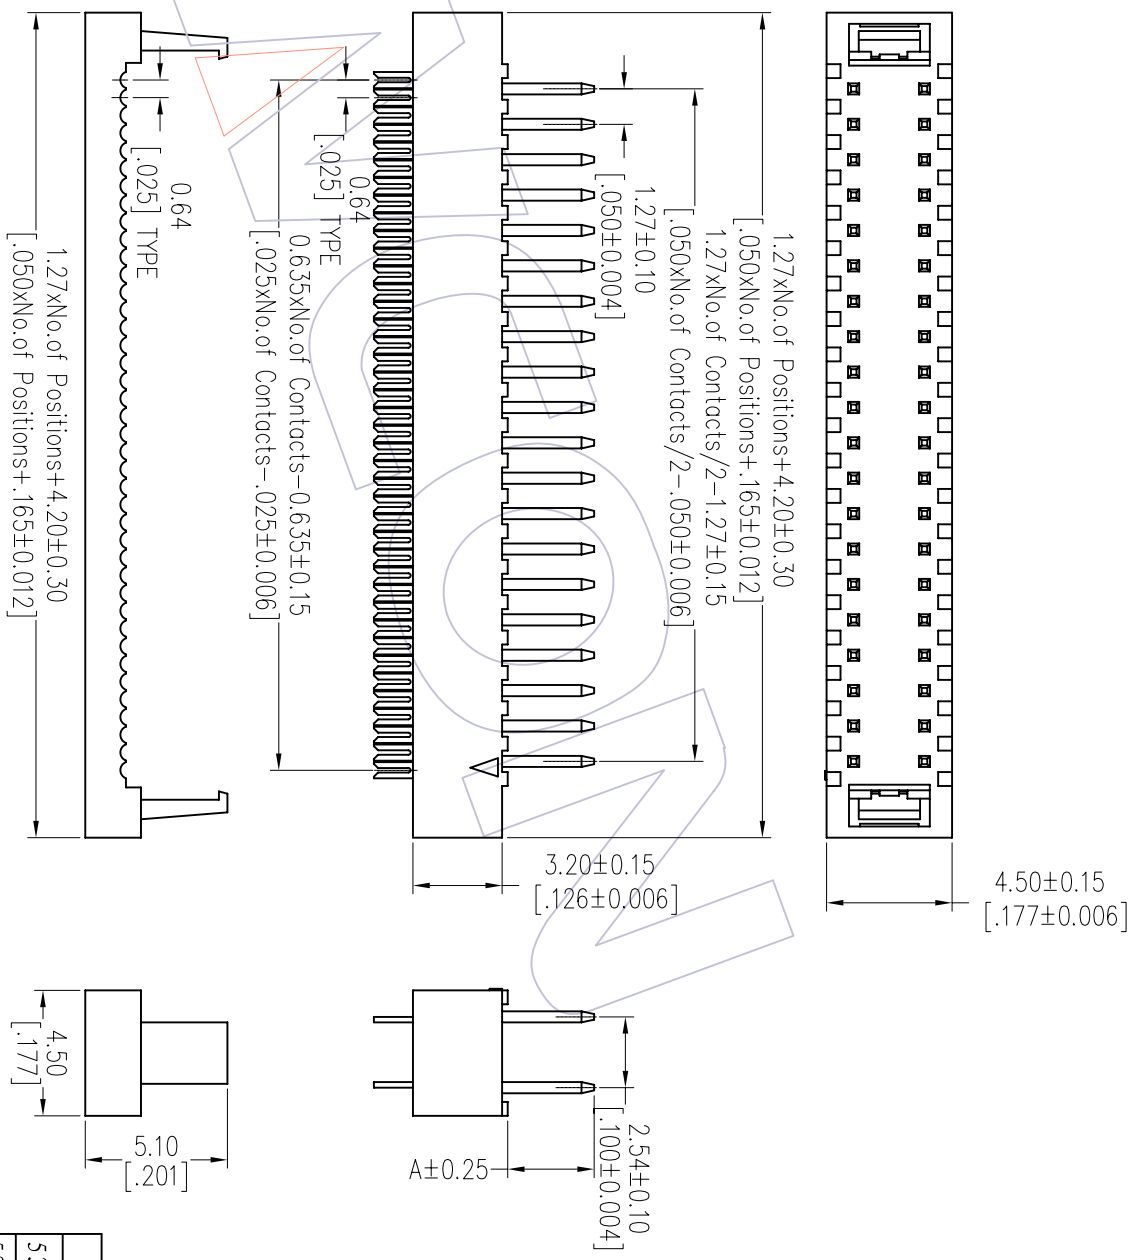

PART NO.	DIM "A"
5340-XXPXXB01	3.10
5340-XXPXXB02	1.90

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/10/09	NEW		XX	JYHuog	2012/10/09	mm	A4	SBB TAB
				X.XX	CHECK	DATE	UNIT	SIZE	TITLE:
				X.XXX	±0.25		mm	A4	1.27x2.54 DIP PLUG CONNECTOR
				Angle	±0.15			1/1	(TERMINATED HEIGHT 5.1)
				± 3'	APPROVE	DATE	PROJ.		Customer NO.

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
---	--