

HSP



NOTES:
 Rated Current: 0.5AMP
 Voltage rating: 50V AC/DC
 Contact Resistance: 30mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 800MΩ min
 Operation Temperature: -25°C to +85°C

Terminal: Phosphor Bronze, Tin-plated
 Fattig Nail: Brass, Tin-plated
 Housing: LCP+30°F
 Slider: LCP+30°F

Ordering Information

5135-XX R Z B F W T 01

No. of Pins: 02-30P
 Contact Type: B=Bottom contact
 Color: A=Brown, B=Black, W=White, E=Beige
 Packing: T=Tube, R=Reel

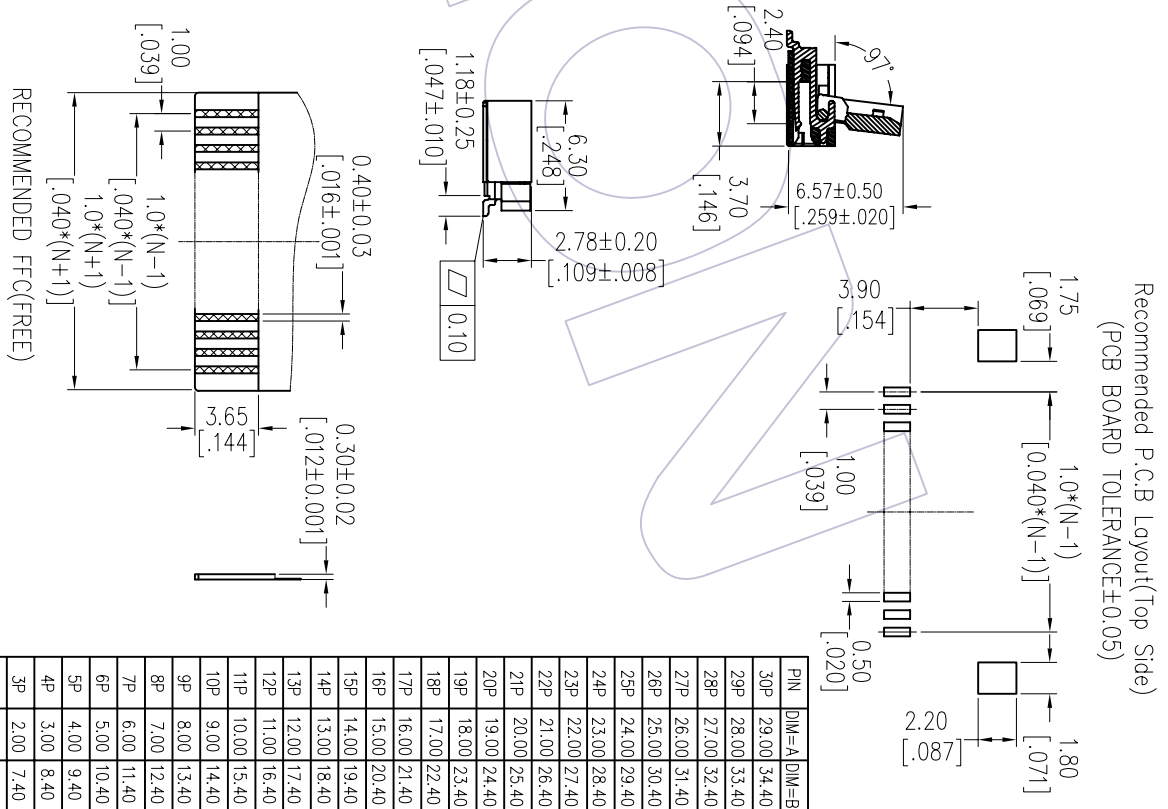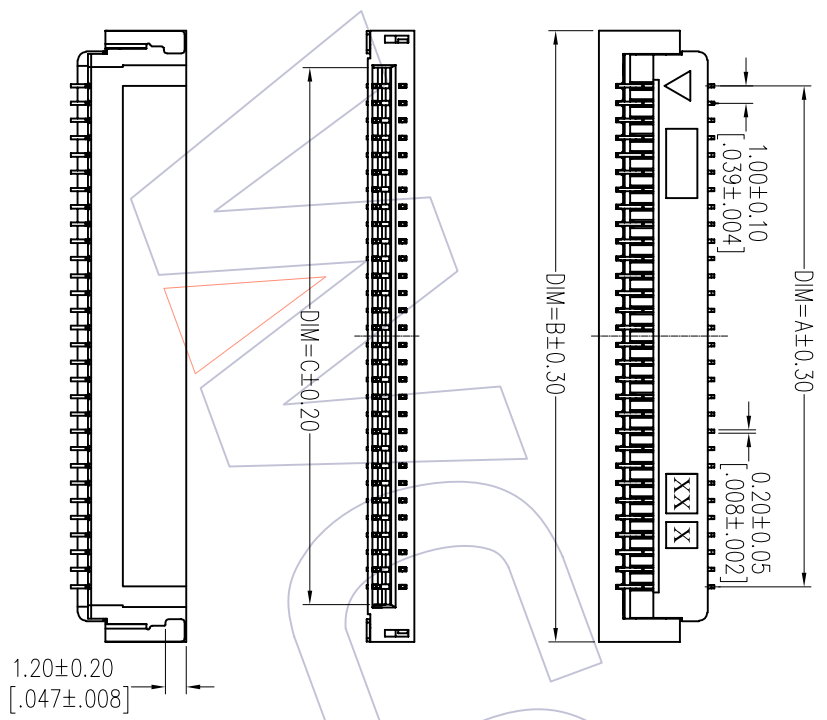

PIN	DIM=A	DIM=B	DIM=C
30P	29.00	34.40	31.10
29P	28.00	33.40	30.10
28P	27.00	32.40	29.10
27P	26.00	31.40	28.10
26P	25.00	30.40	27.10
25P	24.00	29.40	26.10
24P	23.00	28.40	25.10
23P	22.00	27.40	24.10
22P	21.00	26.40	23.10
21P	20.00	25.40	22.10
20P	19.00	24.40	21.10
19P	18.00	23.40	20.10
18P	17.00	22.40	19.10
17P	16.00	21.40	18.10
16P	15.00	20.40	17.10
15P	14.00	19.40	16.10
14P	13.00	18.40	15.10
13P	12.00	17.40	14.10
12P	11.00	16.40	13.10
11P	10.00	15.40	12.10
10P	9.00	14.40	11.10
9P	8.00	13.40	10.10
8P	7.00	12.40	9.10
7P	6.00	11.40	8.10
6P	5.00	10.40	7.10
5P	4.00	9.40	6.10
4P	3.00	8.40	5.10
3P	2.00	7.40	4.10
2P	1.00	6.40	3.10

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
AO	2012/07/04	NEW	

OPERATION	DRAW	DATE	SCALE	FIT
XX	JYHuang	2012/07/04	mm	mm
XX	CHECK	DATE	UNIT	SIZE
XXX			A4	A4
XXX	APPROVE	DATE	SHEET	1/1
Angle			PROJ.	
± 3'				
± 0.15				
± 0.25				
± 0.40				

PART NO.	TITLE:
5135-XXRZBFXX0X	1.00FFC 90° SMT BOTTOM CONTACT H=2.8mm BACK RAISE TYPE
CUSTOMER NO.	Customer NO.

WCON

WCON-Dongguan
 Http: www.wcon.com
 WCON-Kunshan
 Tel: +86 769 85358920
 Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: sales@wcon.com