

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass Δ 1
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0(Std)
 Or PBT+30%G.F UL94V-0

Ordering Information

3110-XX S XX B D00 X X



No. of Pins
 6P 24P
 8P 26P
 10P 30P
 12P 34P
 14P 40P
 16P 50P
 18P 60P
 20P 64P

Contact Plating
 G0=Gold Flash
 G3=0u Gold
 G4=5u Gold
 G5=30u Gold
 S0=Gold Flash/Tin
 S3=10u Gold/Tin
 S4=15u Gold/Tin
 S5=30u Gold/Tin
 SN=Tin

Color Insulator
 B=Black
 U=Blue
 G=Gray(427C)
 E=Gray(413C)

Packing:
 A=Tray
 T=Tube

Item	Pitch	Mating
Standard	2.54	5212/2185
Alternate		

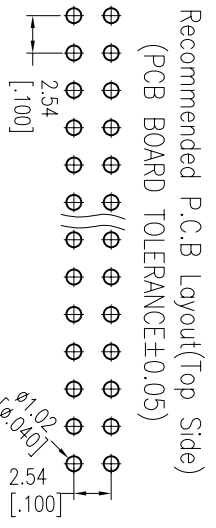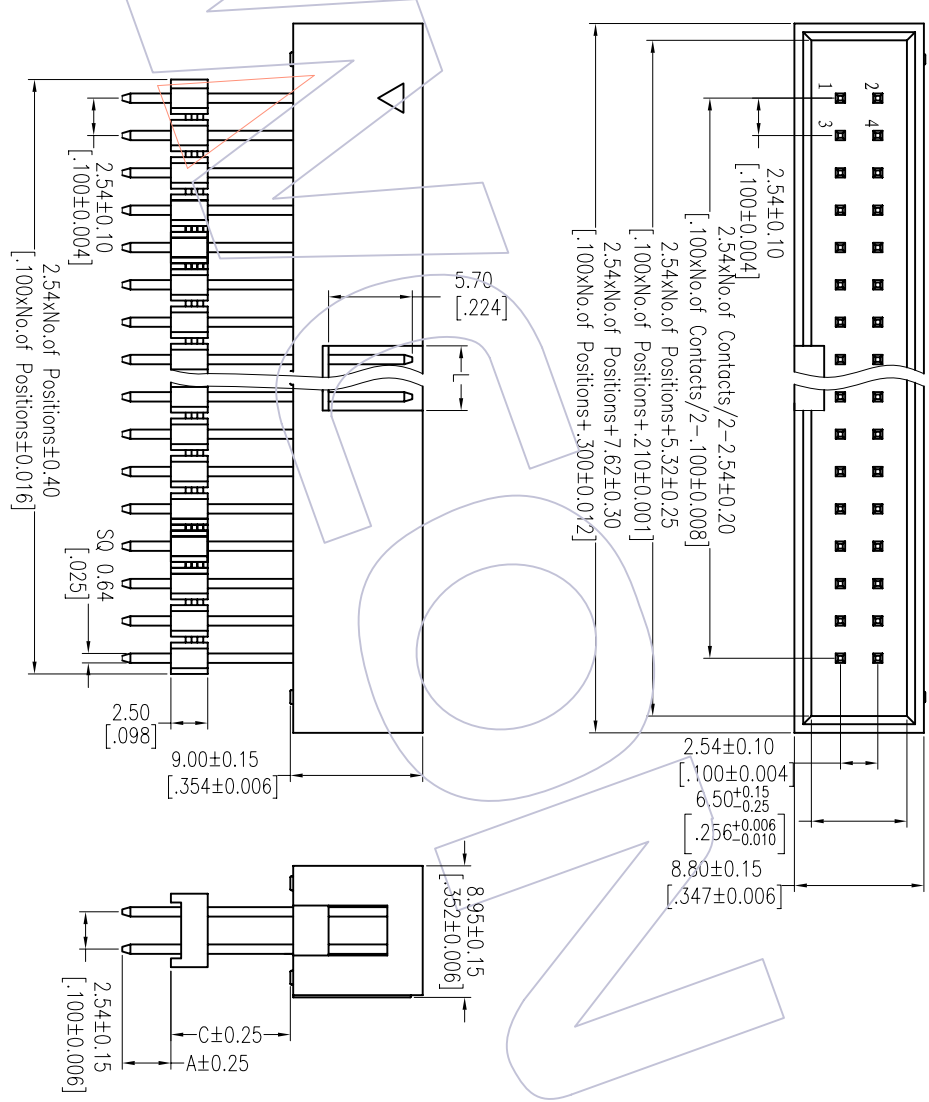

ITEM	A	C	L
Standard	3.30		6-8P=4.0 10-64P=4.4
Alternate			

REV	DATE	MODIFICATION DESCRIPTION
A1	2012/12/24	MODIFY THE NOTES: Phosphor Bronze → Brass
A0	2012/09/25	NEW

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/12/24		mm	3110-XXSXXBD00XX
XX	CHECK	DATE	UNIT		
XX	±0.25		A4		
XX	±0.15		SHEET	1/1	
Angle	APPROVE	DATE	PROU.		
± 3'					
DIM	TOL				

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Tel: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com