
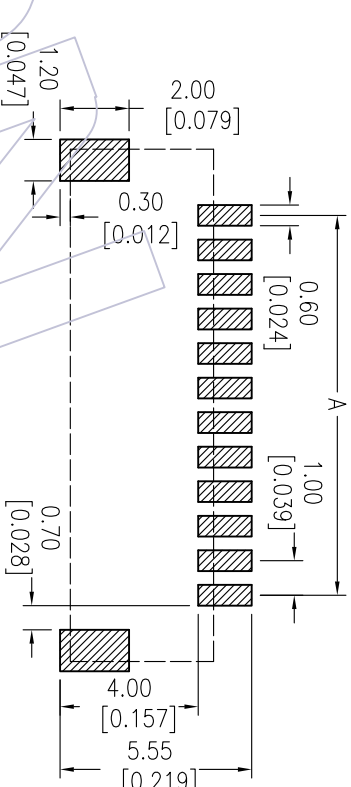


HSF

NOTES:


Rated Current:1.0A
 Rated Voltage:100V
 Contact Resistance:20mΩ max
 Withstand Voltage:250V AC/minute
 Insulation Resistance:100MΩ min
 Operation Temperature:-25℃ to +85℃
 Contact Material:Brass
 Contact plating:Au Or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0

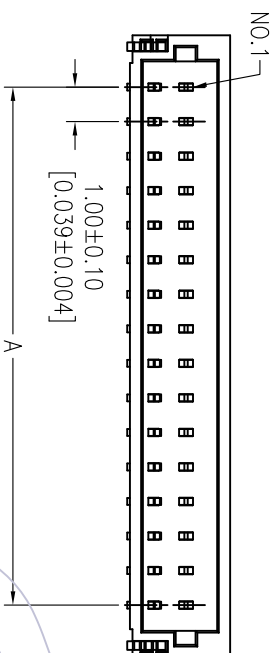

Ordering Information

WF1001 - WZ XX X X 1

No. of pins Contact Plating Color Packing
 02-20P S0=Gold Flash/Tin B=Black T=Tube
 S3=10u"Gold/Tin W=White R=Reel
 S4=15u"Gold/Tin N=Brown
 S5=30u"Gold/Tin
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 Blank=Tin

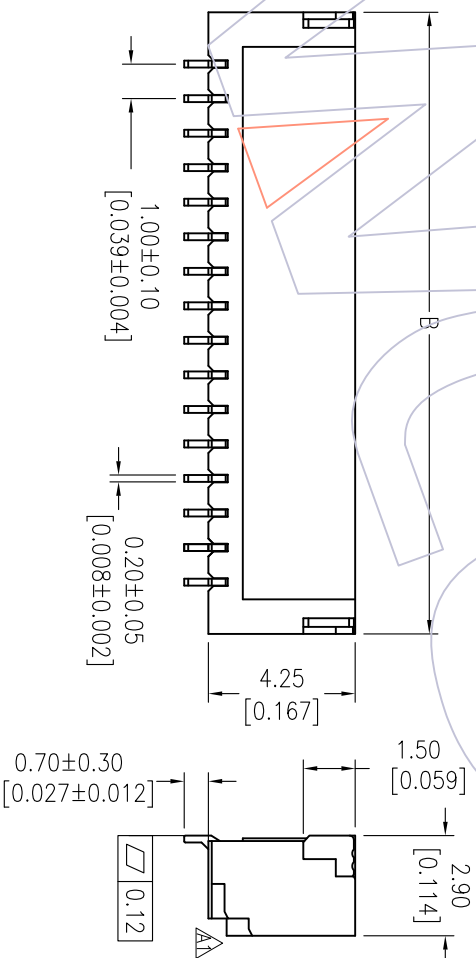

Specification & Ordering Information:

Circuit	Part No.	Dimension		TUBE PCS	REEL/PCS
		A	B		
02	WF1001-WZ02XX1	1.0	4.0	136	1,000/1,500
03	WF1001-WZ03XX1	2.0	5.0	110	1,000/1,500
04	WF1001-WZ04XX1	3.0	6.0	91	1,000/1,500
05	WF1001-WZ05XX1	4.0	7.0	79	1,000/1,500
06	WF1001-WZ06XX1	5.0	8.0	69	1,000/1,500
07	WF1001-WZ07XX1	6.0	9.0	61	1,000/1,500
08	WF1001-WZ08XX1	7.0	10.0	55	1,000/1,500
09	WF1001-WZ09XX1	8.0	11.0	50	1,000/1,500
10	WF1001-WZ10XX1	9.0	12.0	46	1,000/1,500
11	WF1001-WZ11XX1	10.0	13.0	42	1,000/1,500
12	WF1001-WZ12XX1	11.0	14.0	39	1,000/1,500
13	WF1001-WZ13XX1	12.0	15.0	37	1,000/1,500
14	WF1001-WZ14XX1	13.0	16.0	34	1,000/1,500
15	WF1001-WZ15XX1	14.0	17.0	32	1,000/1,500
16	WF1001-WZ16XX1	15.0	18.0	31	1,000/1,500
17	WF1001-WZ17XX1	16.0	19.0	29	1,000/1,500
18	WF1001-WZ18XX1	17.0	20.0	28	1,000/1,500
19	WF1001-WZ19XX1	18.0	21.0	26	1,000/1,500
20	WF1001-WZ20XX1	19.0	22.0	25	1,000/1,500

PART NO. SEE TAB

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 512 57468408

WCON-Kunshan Tel: +86 512 57468408

Fax: +86 769 85358915 Fax: +86 512 57468468

E-mail: sales@wcon.com E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT
X.X	lang	2013/08/13	UNIT	mm
±0.40	CHECK	DATE	A4	1/1
X.XX	APPROVE	DATE	SHEET	PROJ.
±0.25			1/1	
X.XXX	ANGLE			
±0.15				
± 3'				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2013/08/13	Modify	
A0	2012/09/01	NEW	