
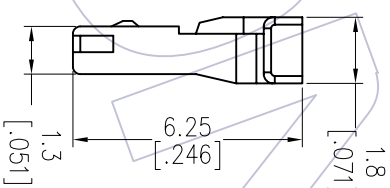
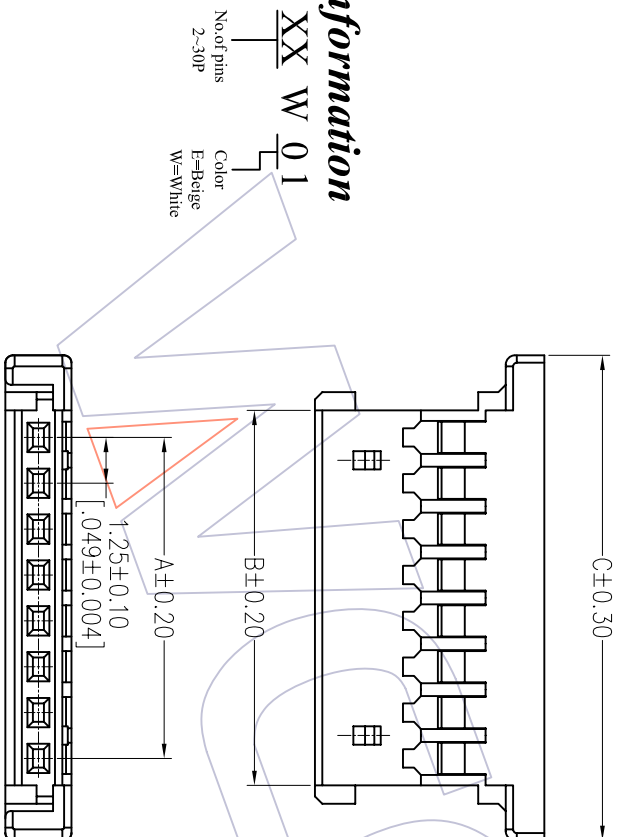


HSF

NOTES:
 Rated Current: 1.0AMP
 Rated Voltage: 125V AC/DC
 Contact Resistance: 20mΩ max
 Withstand Voltage: 250V AC/Minute
 Insulation Resistance: 100MΩ min
 Operation Temperature: -25°C to +85°C
 Insulator Material: PBT+30%GF UL94V-0



Specification & Ordering Information:

| Circuit | Part No. | Dimension | | | Qty /Bag |
|---------|---------------|-----------|-------|-------|----------|
| | | A | B | C | |
| 02 | WF1254-H02X01 | 1.25 | 2.72 | 5.72 | 1,000 |
| 03 | WF1254-H03X01 | 2.50 | 3.97 | 6.97 | 1,000 |
| 04 | WF1254-H04X01 | 3.75 | 5.22 | 8.22 | 1,000 |
| 05 | WF1254-H05X01 | 5.00 | 6.47 | 9.47 | 1,000 |
| 06 | WF1254-H06X01 | 6.25 | 7.72 | 10.72 | 1,000 |
| 07 | WF1254-H07X01 | 7.50 | 8.97 | 11.97 | 1,000 |
| 08 | WF1254-H08X01 | 8.75 | 10.22 | 13.22 | 1,000 |
| 09 | WF1254-H09X01 | 10.00 | 11.47 | 14.47 | 1,000 |
| 10 | WF1254-H10X01 | 11.25 | 12.72 | 15.72 | 1,000 |
| 11 | WF1254-H11X01 | 12.50 | 13.97 | 16.97 | 1,000 |
| 12 | WF1254-H12X01 | 13.75 | 15.22 | 18.22 | 1,000 |
| 13 | WF1254-H13X01 | 15.00 | 16.47 | 19.47 | 1,000 |
| 14 | WF1254-H14X01 | 16.25 | 17.72 | 20.72 | 1,000 |
| 15 | WF1254-H15X01 | 17.50 | 18.97 | 21.97 | 1,000 |
| 16 | WF1254-H16X01 | 18.75 | 20.22 | 23.22 | 1,000 |
| 17 | WF1254-H17X01 | 20.00 | 21.47 | 24.47 | 1,000 |
| 18 | WF1254-H18X01 | 21.25 | 22.72 | 25.72 | 1,000 |
| 19 | WF1254-H19X01 | 22.50 | 23.97 | 26.97 | 1,000 |
| 20 | WF1254-H20X01 | 23.75 | 25.22 | 28.22 | 1,000 |
| 30 | WF1254-H30X01 | 36.25 | 37.72 | 40.72 | 1,000 |

Ordering Information

WF 1254 - H XX W 0 1

No. of pins
2-30P
Color
E=Beige
W=White

| | | | | | | | | | |
|-----|------------|--------------------------|--------|---------------|---------|------------|------------|-----|---------------------|
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
| AO | 2012/09/01 | NEW | | XX ±0.40 | JYHuang | 2012/09/01 | UNIT mm | 1/1 | SEE TAB |
| | | | | XXX ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: |
| | | | | XXX ±0.15 | APPROVE | DATE | SHEET | 1/1 | 1. 25 WAFER HOUSING |
| | | | | Angle ± 3' | PROJ. | | | | Customer NO. |

WCON

WCON-Dongguan
 Http: www.wcon.com
 WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com