

Recommended P.C.B Layout(Top Side)

**NOTES:**  
 Current Rating: 1.0AMP  
 Voltage Rating: 50V AC/DC  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Operation Temperature: -25°C to +85°C


Contact Material: Phosphor Bronze  
 Contact plating: Sn over Ni  
 Insulator Material: Thermoplastic (UL94V-0)

## Ordering Information

### WF1256- WZ XX E R 1

WZ:90° SMT

No of Pins R=Tap&Reel Package

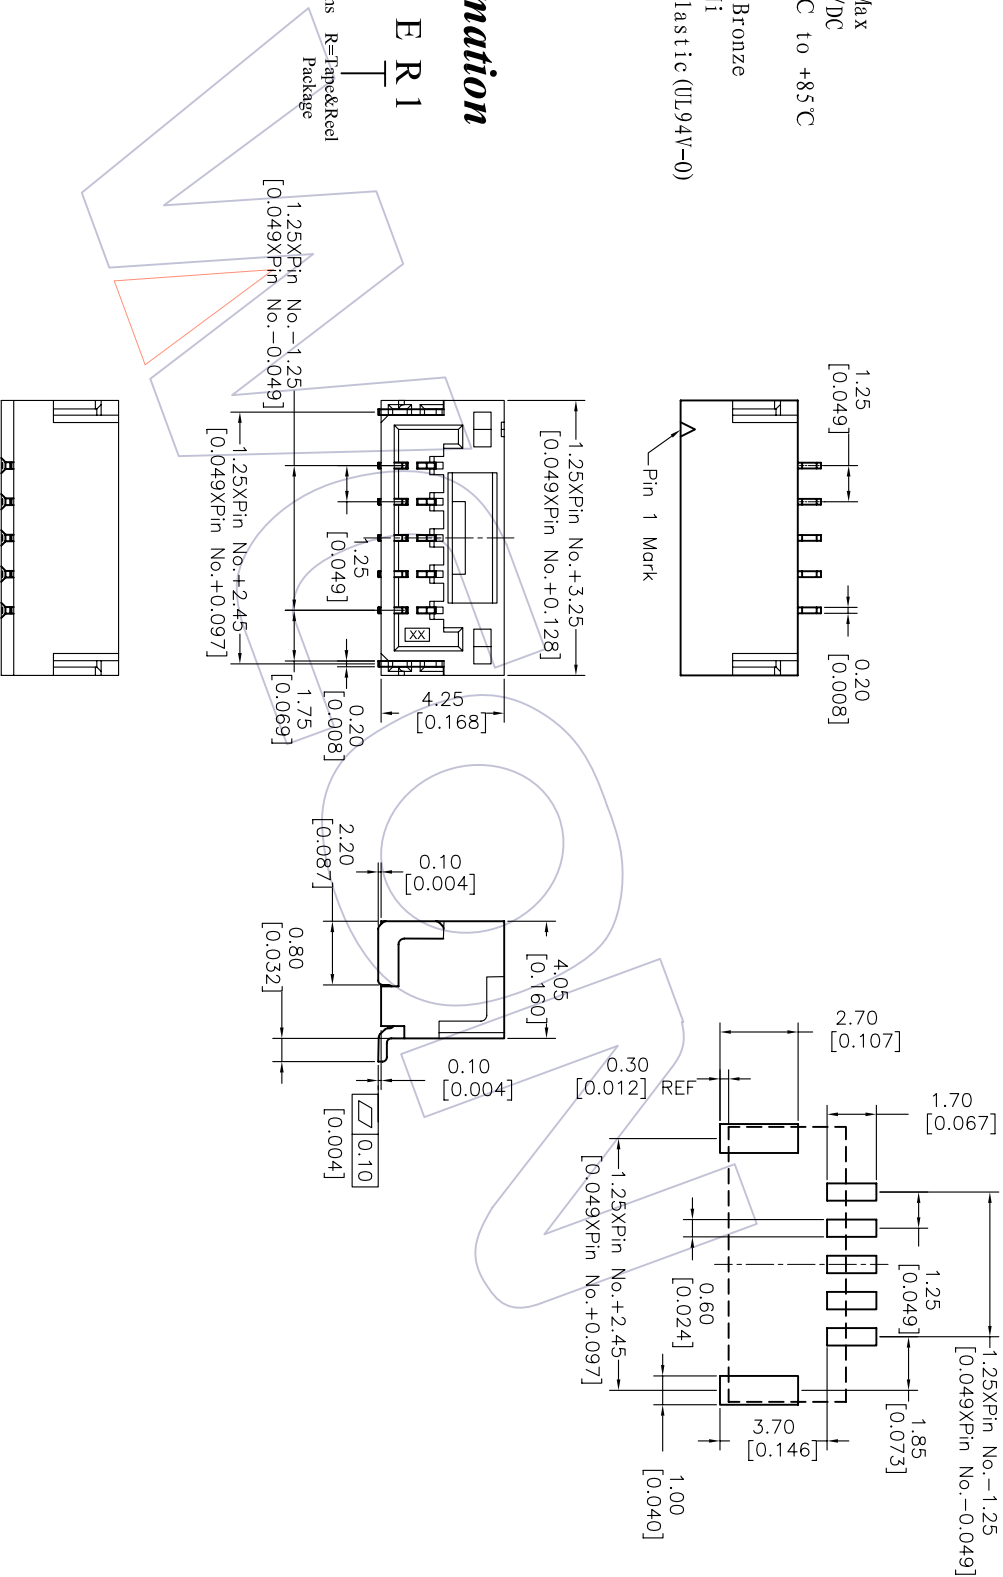

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		Tang	2011/04/14	SCALE		PART NO.	TITLE:
					Angle	± °	DESIGN	CHECK			UNIT	Fit		
A0	2011/04/14	NEW			X.XX	±0.40	X.XX	±0.25			mm	A4	WF1256-WZXXER1	1.25 WAFER SPIN 90° SMT TYPE
H					X.XX		X.XX					1/1		

**WCON** 维峰五金电子有限公司  
 WAFER HARDWARE ELECTRONICS CO. LTD