

HSF



NOTES:

1. MATERIAL:
 1.1 HOUSING:PA66+30%GF(UL94V-0)
 1.2 COVER:PA66+30%GF(UL94V-0)
 1.3 TERMINAL:BRASS,MATTE TIN PLATED OVER NICKEL
2. ELECTRICAL:
 2.1 CURRENT RATING: 8 A
 2.2 VOLTAGE RATING: 300 V
 2.3 CONTACT RESISTANCE:8 mΩ MAX.
 2.4 DIELECTRIC WITHSTANDING VOLTAGE:2000V AC
 2.5 INSULATION RESISTANCE:1000 MΩ MIN
3. ENVIRONMENTAL:
 3.1 OPERATION TEMPERATURE:-40°C TO +105°C
4. No.OF POSITIONS:2~20
5. ALL MATERIALS SHOULD BE COMPLIANT TO ROHS

Ordering Information:

P M 350 - 3 S XX A SM 2 N

M=Male Pitch 350=3.50
 No.of Pins (Per Row) A=Green SM=Matte Tin
 Color Contact Plated Series No.
 02-20P

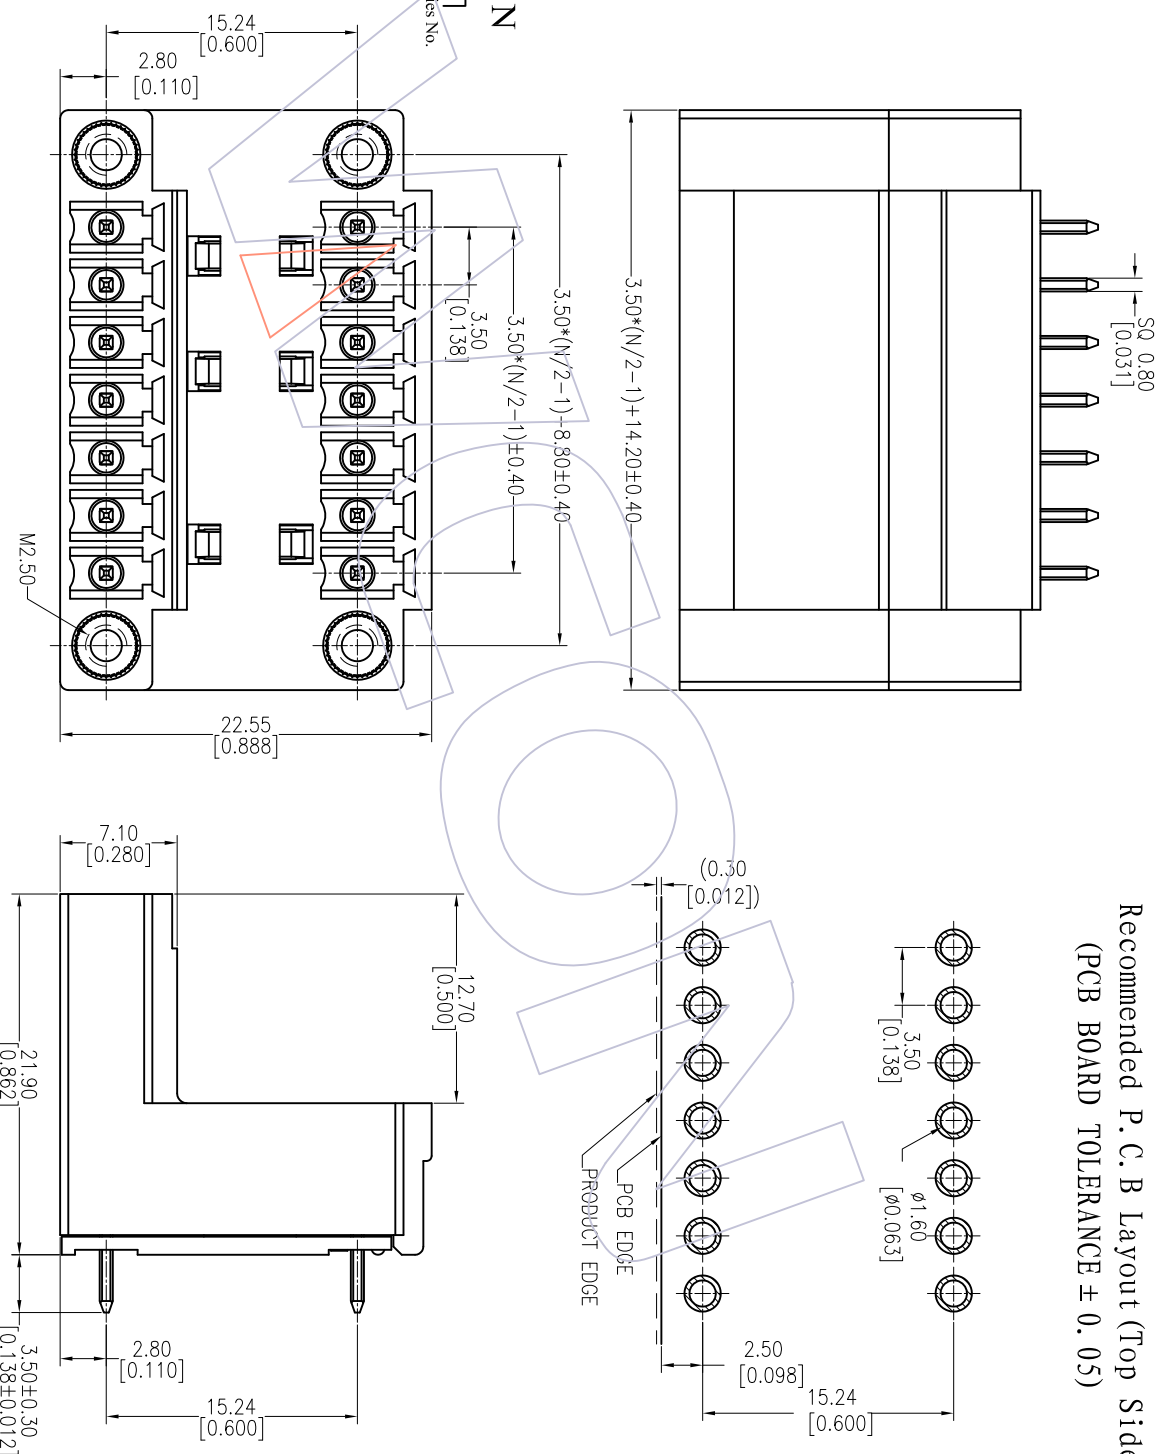

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2013/09/17	NEW		XX ±0.40	Tsingn	2013/09/17	mm A4	inch	PM381-3SXXASM2N	3.50mm Pitch Male Pluggable Terminal Blocks Double Stagger Tier With Flange	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
				XXX ±0.25	CHECK	DATE	SIZE	A4				
				XXX ±0.15	APPROVE	DATE	SHEET	1/1				
				Angle ± 3°	PROJ.							
				DIM TOL								

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com