
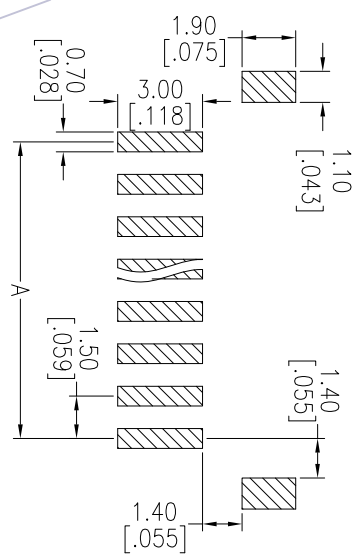
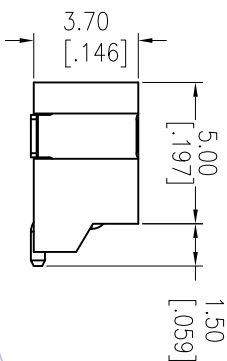


HSP

Recommended P.C.B Layout
(PCB BOARD TOLERANCE±0.05)


NOTES:
 Rated Current:1.0AMP
 Rated Voltage:50V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:500MΩ min
 Operation Temperature:-25°C to +85°C
 Insulator Material:PA6T+30%G.F UL94V-0

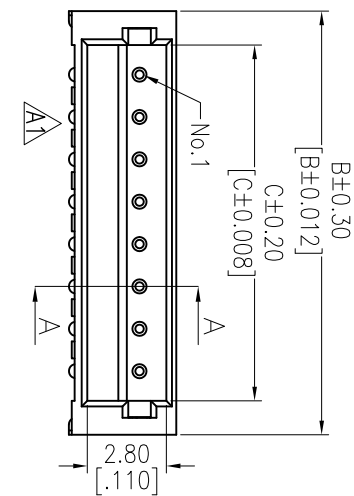

Ordering Information

WF1501 - WZ XX XX X X 1

No. of pins Contact Plating Color Packing
 02-15P S0=Gold Flash/Tin B=Black K=Reel
 S3=10u"Gold/Tin E=Beige
 S4=15u"Gold/Tin (Natural) T=Tube
 S5=30u"Gold/Tin
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 Blank=Tin

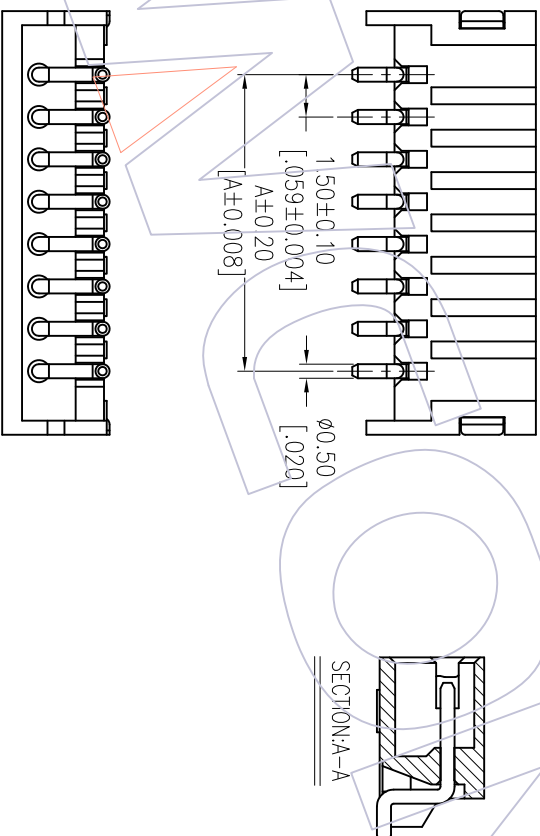

Specification & Ordering Information:

Circuit	Part No.	Dimension		
		A	B	C
02	WF1501-WZ02XX1	1.50	6.00	3.60
03	WF1501-WZ03XX1	3.00	7.50	5.10
04	WF1501-WZ04XX1	4.50	9.00	6.60
05	WF1501-WZ05XX1	6.00	10.50	8.10
06	WF1501-WZ06XX1	7.50	12.00	9.60
07	WF1501-WZ07XX1	9.00	13.50	11.10
08	WF1501-WZ08XX1	10.50	15.00	12.60
09	WF1501-WZ09XX1	12.00	16.50	14.10
10	WF1501-WZ10XX1	13.50	18.00	15.60
11	WF1501-WZ11XX1	15.00	19.50	17.10
12	WF1501-WZ12XX1	16.50	21.00	18.60
13	WF1501-WZ13XX1	18.00	22.50	20.10

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW		DATE	SCALE		FIT	PART NO.
				XX	±0.40	JYHuang	CHECK		UNIT	mm		
A2	2014/11/21	Modify		X.X	±0.25	CHECK		2014/11/21	A4	1/1	WF1501-WZXXXX1	
A1	2013/04/26	PA6T+30%G.F--PA9T,MODIFY THE DRAWING		X.XXX	±0.15							
AO	2012/09/03	NEW		X.XXX	±0.15							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3'	APPROVE	DATE	SHEET	PROJ.			

WCON

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com