
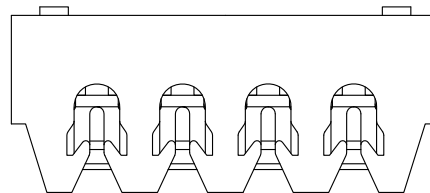
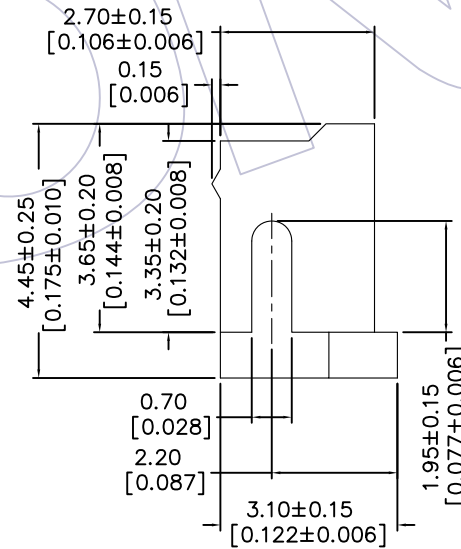
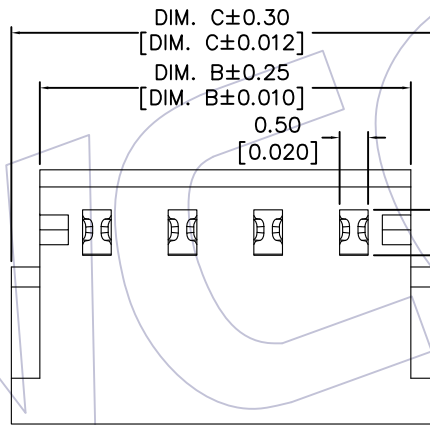


HSF

NOTES:
 Rated Current: 0.8 AMP.
 Contact Resistance: 25mΩ Max.
 Withstand Voltage: 500V
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105 °C

Contact Material: Phosphor Bronze
 Contact Plating: Sn over Ni
 Main Body Material: PA66
 Mating: 28# AWG

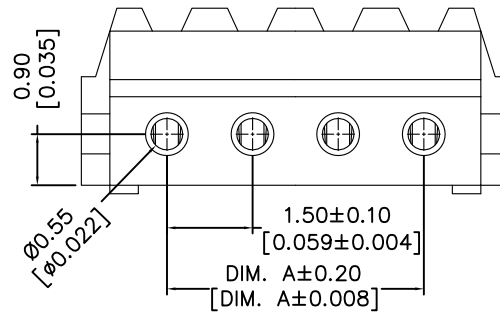

Pin	Dimension		
	A	B	C
02	1.5	3.5	4.5
03	3.0	5.0	6.0
04	4.5	6.5	7.5
05	6.0	8.0	9.0
06	7.5	9.5	10.5
07	9.0	11.0	12.0
08	10.5	12.5	13.5
09	12.0	14.0	15.0
10	13.5	15.5	16.5
11	15.0	17.0	18.0
12	16.5	18.5	19.5
13	18.0	20.0	21.0
14	19.5	21.5	22.5
15	21.0	23.0	24.0
16	22.5	24.5	25.5
17	24.0	26.0	27.0
18	25.5	27.5	28.5
19	27.0	29.0	30.0
20	28.5	30.5	31.5

Ordering Information

WF1501-H I **XX** **X** **0** **1**

No. of pins
02~20P

Color
B=Black
E=Beige
W=White
G=Green

Packing
0=PE Bag

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.
A0	2017.06.05	NEW		x.x ±0.40	Ding	2017.06.05	1:1	WF1501-HIXXX01
				x.xx ±0.25	CHECK	DATE	UNIT	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SIZE	"J" TYPE 1.5mm Wafer
				Angle ± 3°			SHEET	Customer NO.
				DIM TOL			1/1	
							PROJ.	

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com