


HSF

NOTES:



Rated Current:1.0AMP
 Rated Voltage:100V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:500MΩ min
 Operation Temperature:-25°C to +85°C
 Material:PA66 UL94V-0

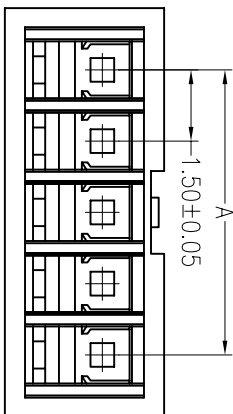

Ordering Information

WF1502 - H XX W 0 1

No.of pins Color Packing
 02P-20P W=White 0=PE Bag
 E=Beige

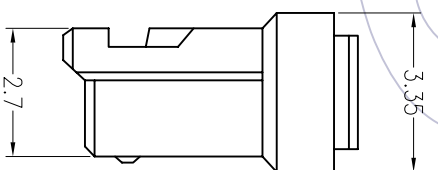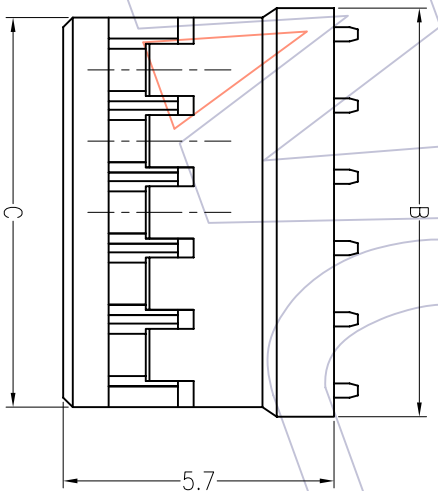

Circuit	Part No.	Dimension			Q'ty /Bag
		A	B	C	
02	WF1502-H02W01	1.5	4.1	3.7	1,000
03	WF1502-H03W01	3.0	5.6	5.2	1,000
04	WF1502-H04W01	4.5	7.1	6.7	1,000
05	WF1502-H05W01	6.0	8.6	8.2	1,000
06	WF1502-H06W01	7.5	10.1	9.7	1,000
07	WF1502-H07W01	9.0	11.6	11.2	1,000
08	WF1502-H08W01	10.5	13.1	12.7	1,000
09	WF1502-H09W01	12.0	14.6	14.2	1,000
10	WF1502-H10W01	13.5	16.1	15.7	1,000
11	WF1502-H11W01	15.0	17.6	17.2	1,000
12	WF1502-H12W01	16.5	19.1	18.7	1,000
13	WF1502-H13W01	18.0	20.6	20.2	1,000
14	WF1502-H14W01	19.5	22.1	21.7	1,000
15	WF1502-H15W01	21.0	23.6	23.2	1,000
16	WF1502-H16W01	22.5	25.1	24.7	1,000
17	WF1502-H17W01	24.0	26.6	26.2	1,000
18	WF1502-H18W01	25.5	28.1	27.7	1,000
19	WF1502-H19W01	27.0	29.6	29.2	1,000
20	WF1502-H20W01	28.5	31.1	30.7	1,000

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD

OPERATION	DRAW	WEIXD	08/07/30	SCALE	PART NO.	
					UNIT	SBE TAB
X.X	±0.25			1:1	mm	
X.XX	±0.15	DESIGN				
X.XXX	±0.10	CHECK		A4		
Angle	± 3'	APPROVE		1/1		
DIM	TOL			PROJ.		Customer NO.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/07/30	NEW		

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----