

HSF

NOTES:


Rated Current:3.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25°C to +85°C

Contact Material:Phosphor bronze
 Contact Plating:Au or Sn Over Ni

Ordering Information

WF2549 - T P XX 02

Contact Plating
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=1in

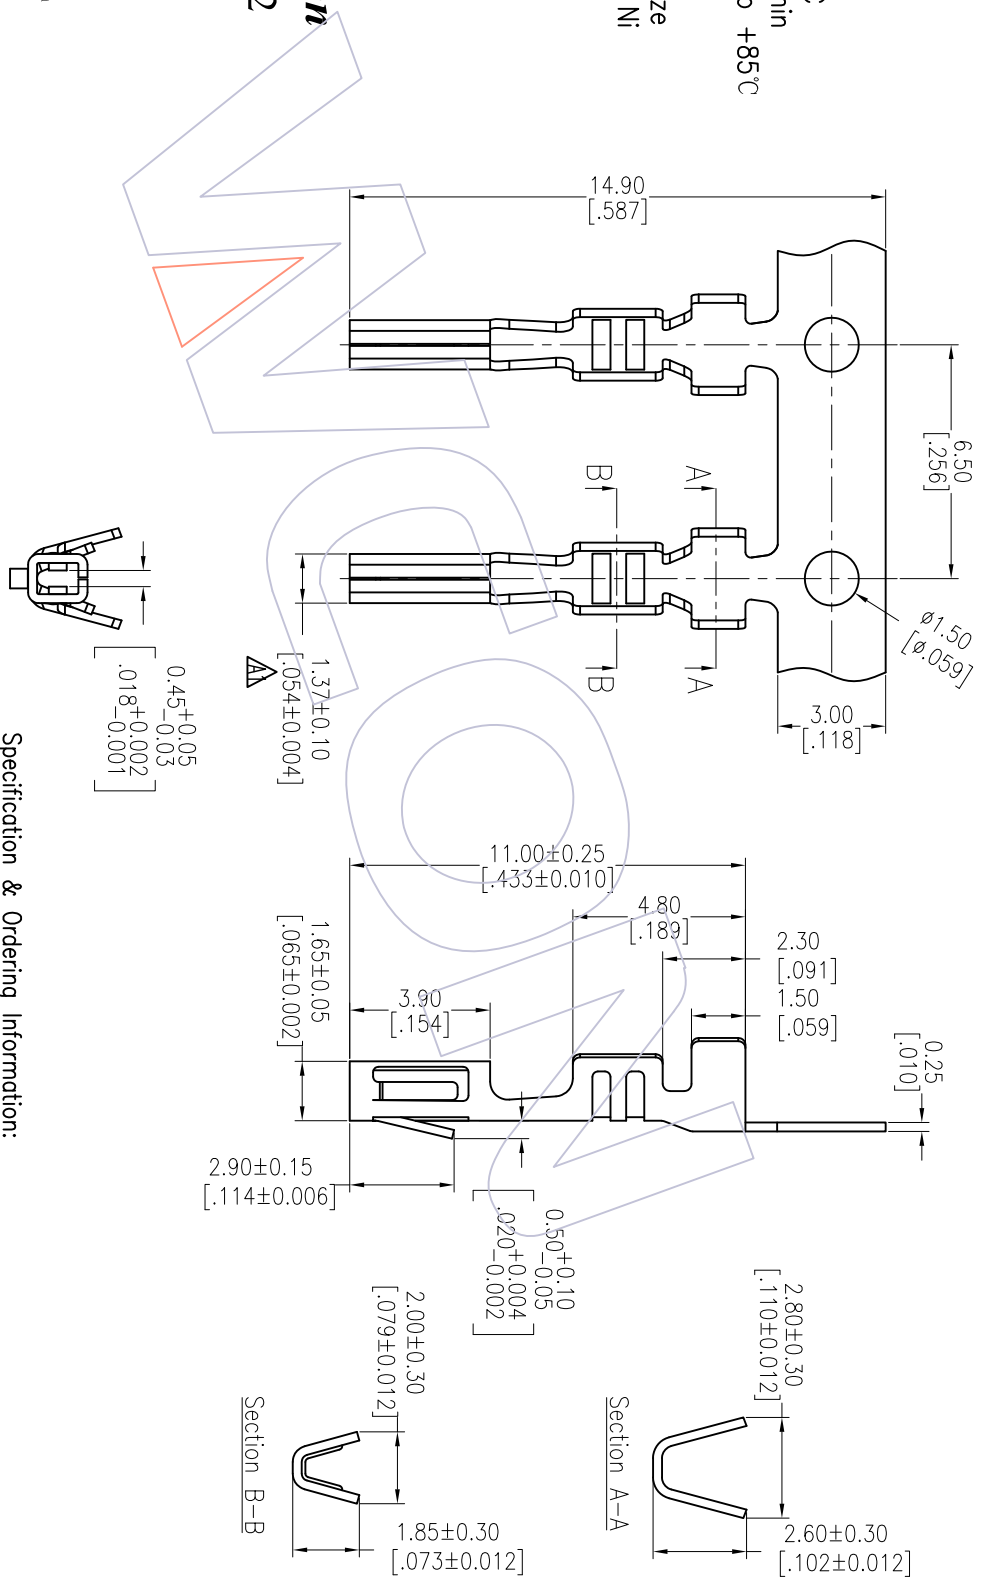

Specification & Ordering Information:

Part No.	Thickness	Finish	Material	Wire Range	Insulation O.D
WF2549-TPS002	0.25	Gold/Tin	Phosphor bronze	AWG#20~#24	1.55mm(Max)
WF2549-TPSN02	0.25	Tin-Plated	Phosphor bronze	AWG#20~#24	1.55mm(Max)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A1	2015/01/29	1.37±0.05 → 1.37±0.10		X.X ±0.40	JYHuang	2012/09/08	mm A4		WF2549-TPXX02	2.54mm TERMINAL	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
AO	2012/09/08	NEW		X.XXX ±0.25	CHECK		SHEET 1/1					
				Angle ± 3'	APPROVE				Customer NO.			
				DIM TOL			PROJ.					

Http: www.wcon.com