HSF

NOTES:
Rated Current: 5.0A
Contact Resistance: 20mΩ max
Withstand Voltage: 1500V AC/Minute
Insulation Resistance: 1000MΩ min
Operation Temperature: −25℃ to+85℃

Insulator Material: PA66
Used with: WF3001−MT(Male Terminal)

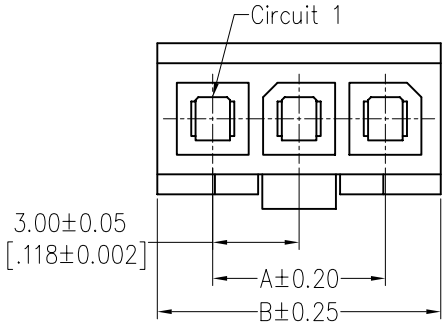

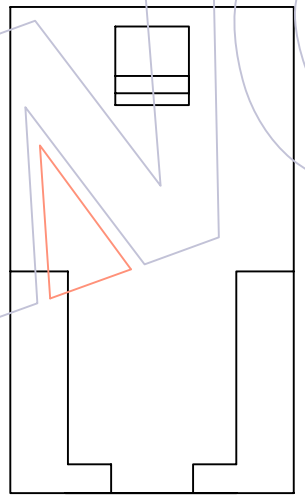

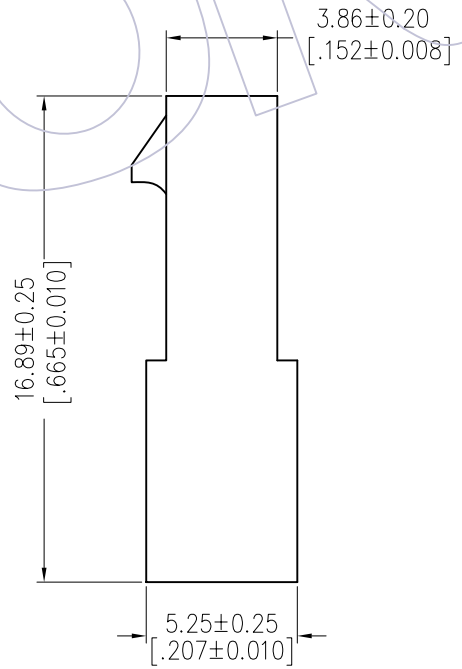

Ordering Information

WF 3001 - 1 H K XX B 0 2

- 1: No.of row, Single Row
- XX: No.of pins, 02~12pin
- B: Color, E=Beige, W=White, B=Black
- 0: Packing, 0=PE Bag

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	WF3001−1HK02B02	3.00	6.85
03	WF3001−1HK03B02	6.00	9.85
04	WF3001−1HK04B02	9.00	12.85
05	WF3001−1HK05B02	12.00	15.85
06	WF3001−1HK06B02	15.00	18.85
07	WF3001−1HK07B02	18.00	21.85
08	WF3001−1HK08B02	21.00	24.85
09	WF3001−1HK09B02	24.00	27.85
10	WF3001−1HK10B02	27.00	30.85
11	WF3001−1HK11B02	30.00	33.85
12	WF3001−1HK12B02	33.00	36.85

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/09/20	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW JYHuang	DATE 2012/09/20	SCALE	FIT
CHECK	DATE	UNIT	mm / inch
APPROVE	DATE	SIZE	A4
		SHEET	1/1
		PROJ.	

PART NO. SEE TAB

TITLE: 3.00mm SINGLE ROW HOUSING

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com