



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)


NOTES:

- Current Rating: 2.0A AC, DC
- Voltage Rating: 250V AC, DC
- Contact Resistance: 20mΩ max
- Withstand Voltage: 800V AC/minute
- Insulation Resistance: 1000MΩ min
- Temperature Range: -25°C to +85°C
- Contact Material: Brass
- Contact plating: Au or Sn Over Ni
- Fitting Nail: Phosphor Bronze Tin-Plated
- Insulator Material: PA6T+30%G.F (UL-94V-0)

Ordering Information

WF2001 - WM XX XX 1

- No. of pins: 02-16P
- Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin
- Color: B=Black, W=Natural, T=Natural
- Packaging: O=PE Bag, =Tube, R=Reel+CAP
- G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, Blank=Tin

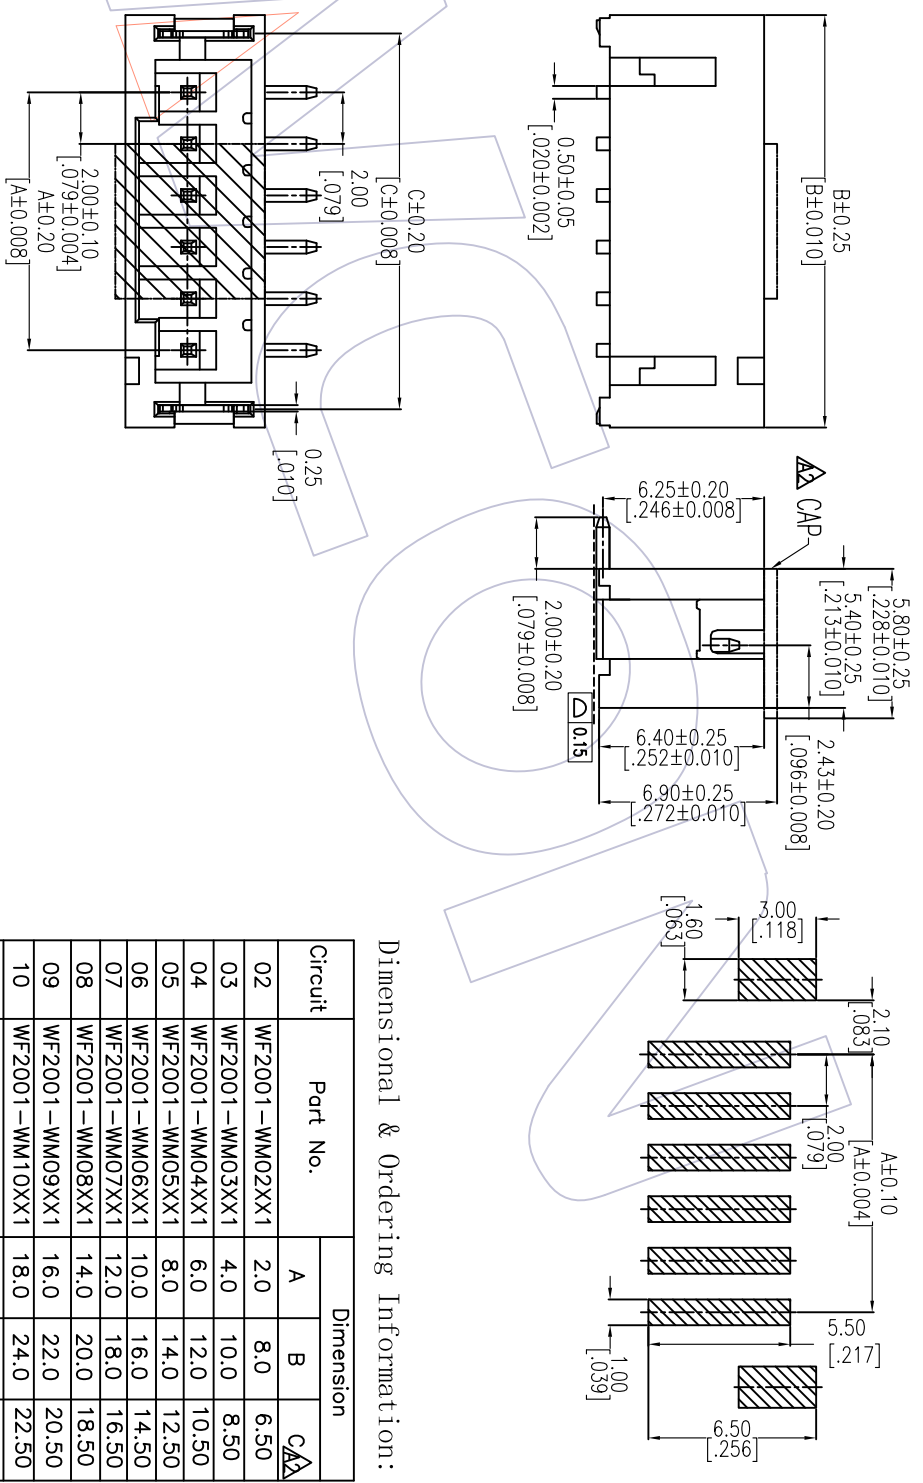

Dimensional & Ordering Information:

Circuit	Part No.	Dimension		
		A	B	C
02	WF2001-WM02XX1	2.0	8.0	6.50
03	WF2001-WM03XX1	4.0	10.0	8.50
04	WF2001-WM04XX1	6.0	12.0	10.50
05	WF2001-WM05XX1	8.0	14.0	12.50
06	WF2001-WM06XX1	10.0	16.0	14.50
07	WF2001-WM07XX1	12.0	18.0	16.50
08	WF2001-WM08XX1	14.0	20.0	18.50
09	WF2001-WM09XX1	16.0	22.0	20.50
10	WF2001-WM10XX1	18.0	24.0	22.50
11	WF2001-WM11XX1	20.0	26.0	24.50
12	WF2001-WM12XX1	22.0	28.0	26.50
13	WF2001-WM13XX1	24.0	30.0	28.50
14	WF2001-WM14XX1	26.0	32.0	30.50
15	WF2001-WM15XX1	28.0	34.0	32.50
16	WF2001-WM16XX1	30.0	36.0	34.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	SPE TABLE
A2	2017/06/22	Mylar → CAP	---	XX ±0.40	Ding	2017/06/22	UNIT mm			
A1	2015/09/11	T=Natural, W=Natural	---	XXX ±0.25	CHECK	DATE	SIZE A4		TITLE:	
A0	2012/08/25	NEW	---	XXX ±0.15	APPROVE	DATE	SHEET 1/1		"J" TYPE PH2.0 WAFER 180° SMT	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE	DATE	PROJ.		Customer NO.	



WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sdles@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sdlesk@wcon.com

Http: www.wcon.com