


HSP

NOTES:

Rated Voltage: 250V AC/DC
 Rated Current: 3.0AMP
 Contact Resistance: 10mΩ max
 Withstand Voltage: 800V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C

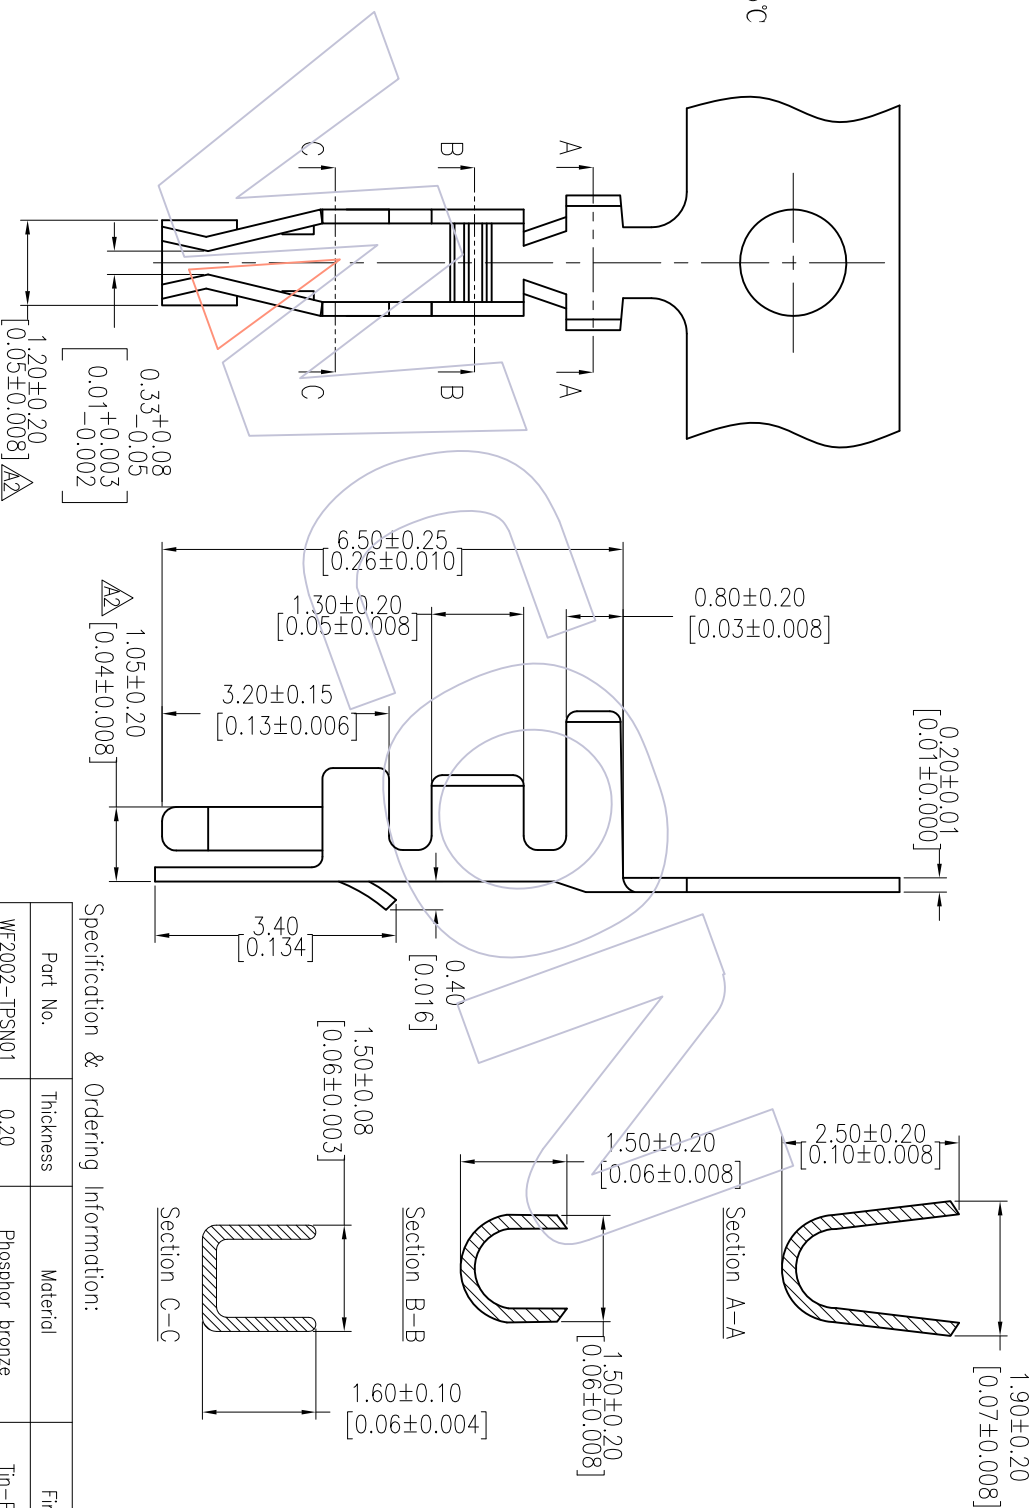

Specification & Ordering Information:

Part No.	Thickness	Material	Finish
WF2002-TPSN01	0.20	Phosphor bronze	Tin-Plated
WF2002-TPG001	0.20	Phosphor bronze	Gold Flash
WF2002-TPG101	0.20	Phosphor bronze	Gold 3u"

Ordering Information

WF 2002 - TP SN 0 1

Material
 P=Phosphor bronze
 B=Brass
 Contact Plating
 GP=Gold Flash
 SO=Gold Flash/Tin
 SN=Tin

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW BEN	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A2	12/01/10	Modify drawing		XX	BEN	2012/01/10	mm		SEE TAB		Tel: +86 769 85358920	Tel: +86 512 57468408
A1	10/10/21	Modify drawing		XXX	CHECK		A4			PHD2. 00mm TERMINAL	Fax: +86 769 85358915	Fax: +86 512 57468468
A0	08/07/30	NEW		XXXX	APPROVE		1/1		Customer NO.		E-mail: sales@wcon.com	E-mail: wconks@wcon.com
				Angle								
				DIM								
				TOL								



Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: wconks@wcon.com