

HSF


NOTES:

- Rated Voltage:250V AC/DC
- Rated Current:2.0AMP
- Contact Resistance:20mΩ Max
- Withstand Voltage:800V AC/minute
- Insulation Resistance:1000MΩ Min
- Operation Temperature:-25°C to +85°C
- Contact Material:Brass
- Contact plating: Au or Sn over Ni
- Insulator Material:PA66+30%G.F UL94V-0

Ordering Information


WF2002A-WS XX X 0 1

No. of Pins Insulator Color Packing
 04P-50P W= White 0=PE Bag
 B= Black T=Tube
 U= Blue
 E= Beige

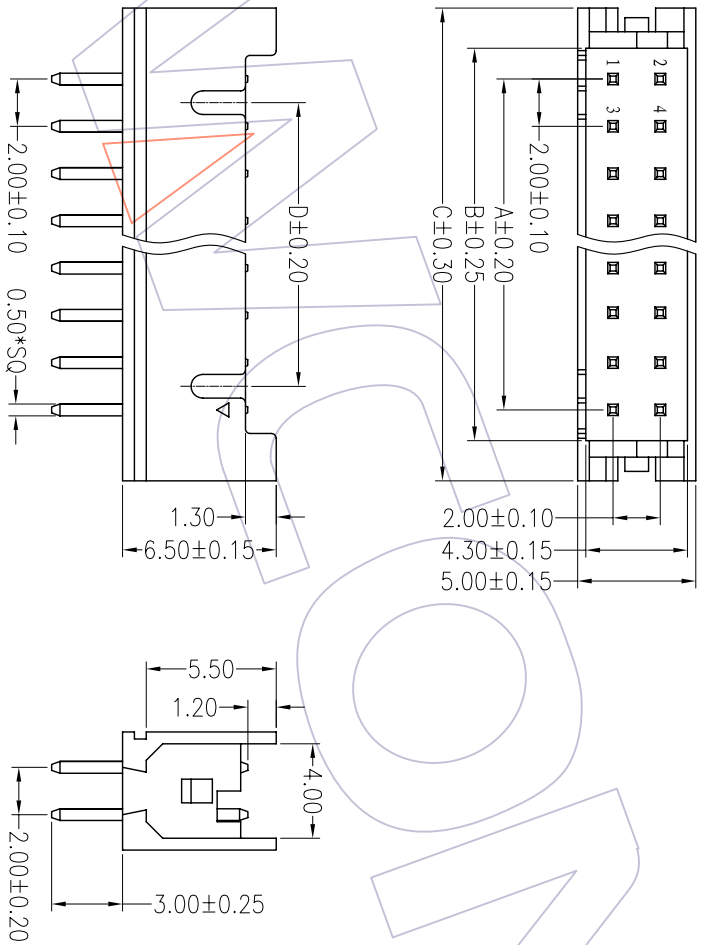

Specification & Ordering Information:

| Circuit | Part No. | Dimension | | | | Qty /Bag |
|---------|-----------------|-----------|-------|-------|-------|----------|
| | | A | B | C | D | |
| 04 | WF2002A-WS04X01 | 2.00 | 4.60 | 8.00 | --- | 4,000 |
| 06 | WF2002A-WS06X01 | 4.00 | 6.60 | 10.00 | --- | 3,000 |
| 08 | WF2002A-WS08X01 | 6.00 | 8.60 | 12.00 | 4.00 | 2,000 |
| 10 | WF2002A-WS10X01 | 8.00 | 10.60 | 14.00 | 6.00 | 2,000 |
| 12 | WF2002A-WS12X01 | 10.00 | 12.60 | 16.00 | 8.00 | 2,000 |
| 14 | WF2002A-WS14X01 | 12.00 | 14.60 | 18.00 | 10.00 | 1,000 |
| 16 | WF2002A-WS16X01 | 14.00 | 16.60 | 20.00 | 12.00 | 1,000 |
| 18 | WF2002A-WS18X01 | 16.00 | 18.60 | 22.00 | 14.00 | 1,000 |
| 20 | WF2002A-WS20X01 | 18.00 | 20.60 | 24.00 | 16.00 | 1,000 |
| 22 | WF2002A-WS22X01 | 20.00 | 22.60 | 26.00 | 18.00 | 1,000 |
| 24 | WF2002A-WS24X01 | 22.00 | 24.60 | 28.00 | 20.00 | 800 |
| 26 | WF2002A-WS26X01 | 24.00 | 26.60 | 30.00 | 22.00 | 800 |
| 28 | WF2002A-WS28X01 | 26.00 | 28.60 | 32.00 | 24.00 | 800 |
| 30 | WF2002A-WS30X01 | 28.00 | 30.60 | 34.00 | 26.00 | 600 |
| 32 | WF2002A-WS32X01 | 30.00 | 32.60 | 36.00 | 28.00 | 500 |
| 34 | WF2002A-WS34X01 | 32.00 | 34.60 | 38.00 | 30.00 | 500 |
| 36 | WF2002A-WS36X01 | 34.00 | 36.60 | 40.00 | 32.00 | 500 |
| 38 | WF2002A-WS38X01 | 36.00 | 38.60 | 42.00 | 34.00 | 300 |
| 40 | WF2002A-WS40X01 | 38.00 | 40.60 | 44.00 | 36.00 | 300 |
| 42 | WF2002A-WS42X01 | 40.00 | 42.60 | 46.00 | 38.00 | 300 |
| 44 | WF2002A-WS44X01 | 42.00 | 44.60 | 48.00 | 40.00 | 300 |
| 46 | WF2002A-WS46X01 | 44.00 | 46.60 | 50.00 | 42.00 | 300 |
| 48 | WF2002A-WS48X01 | 46.00 | 48.60 | 52.00 | 44.00 | 300 |
| 50 | WF2002A-WS50X01 | 48.00 | 50.60 | 54.00 | 46.00 | 300 |

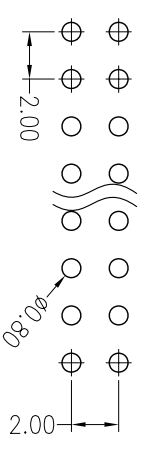

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | | DRAW | | SCALE | PART NO. | SEE TAB |
|-----|----------|--------------------------|--------|---------|-----------|-------|---------|-------|-------|-------------------------------|---------|
| | | | | | XXX | ±0.40 | DESIGN | UNIT | | | |
| A0 | 08/07/30 | NEW | | | XXX | ±0.25 | CHECK | A4 | 1:1 | PHD2. 0 WAFER 180° WITH LATCH | |
| | | | | | XXX | ±0.15 | CHECK | A4 | 1:1 | | |
| | | | | | Angle | ± 3' | APPROVE | PROJ. | | | |

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD