HSF

NOTES:
Rated Voltage:250V AC/DC
Rated Current:2.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:800V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:-25℃ to +85℃

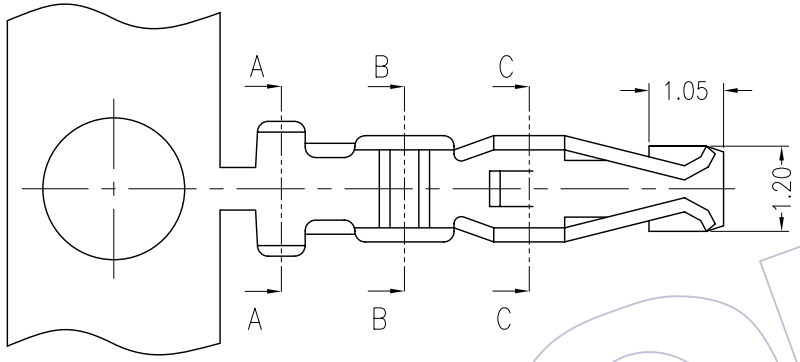



Section A-A



Section B-B

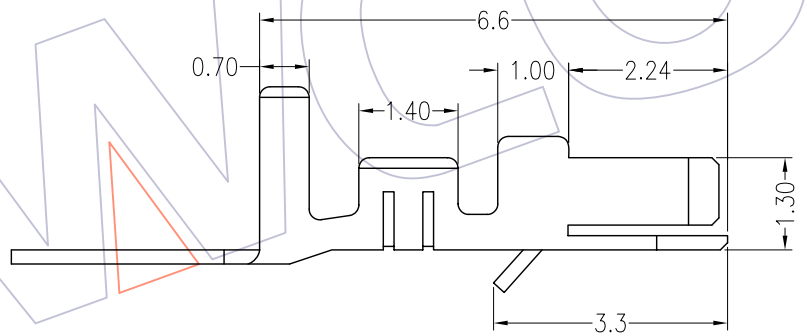



Section C-C

Ordering Information

WF 2002A - T P SN 0 1

Material
P=Phosphor bronze
B=Brass

Contact Plating
G0=Gold Flash
G1=3u"Gold
G2=5u"Gold
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S1=3u"Gold/Tin
S2=5u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

Specification & Ordering Information:

Part No.	Thickness	Material	Finish	Wire Range	Insulation O.D	Q'ty/Reel
WF2002A-TPSN01	0.20	Phosphor bronze	Tin-Plated	AWG#24~#28	1.60mm	10,000PCS

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/07/30	NEW	———	———

OPERATION				
X.X	±0.25	DRAW	William Chen	08.07.30
X.XX	±0.13	DESIGN		
X.XXX	±0.08	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	1:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	SEE TAB
TITLE:	PHD2.00mm TERMINAL
Customer NO.	