

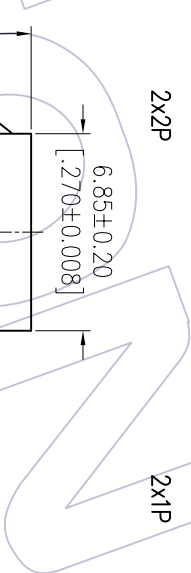




HSF

NOTES:

Rated Current: 5.0A
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C


Insulator Material: PA66
 Used with: WF3001-MT(Male Terminal)

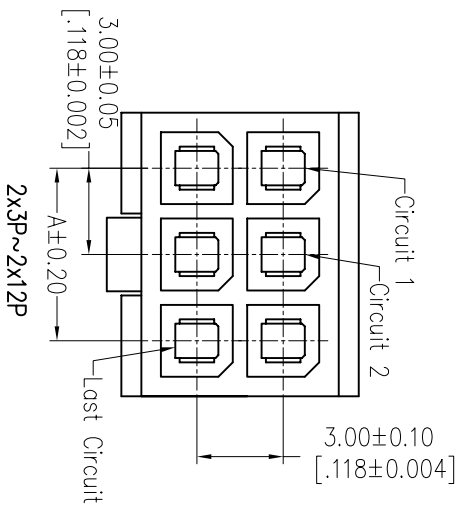

Ordering Information

WF 3001 - 2HK XX B 02

No. of row: Dual Row
 No. of pins: 01~12pin
 Color: E=Beige, W=White, B=Black
 Packing: 0=PE Bag

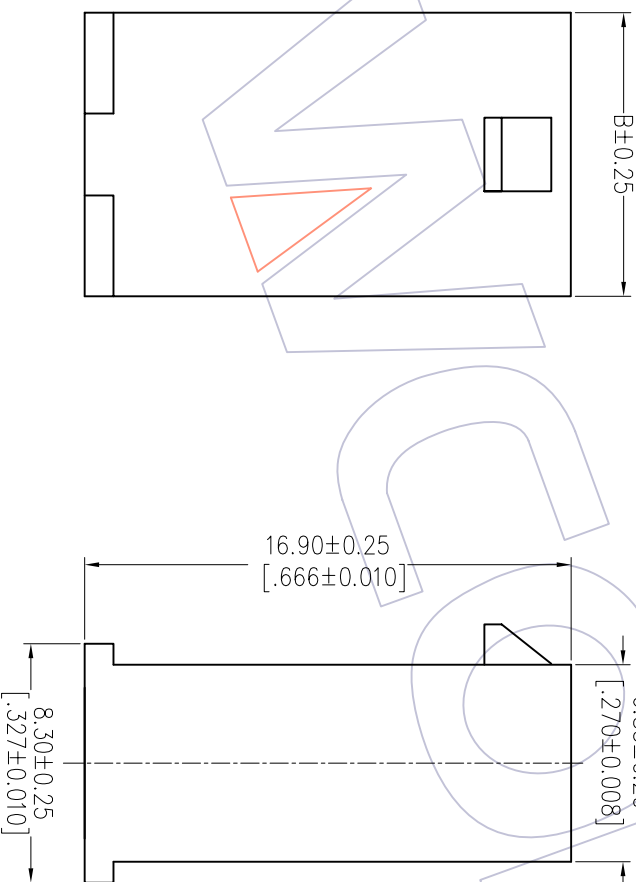

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	WF3001-2HK01B02	---	3.85
04	WF3001-2HK02B02	3.00	6.85
06	WF3001-2HK03B02	6.00	9.85
08	WF3001-2HK04B02	9.00	12.85
10	WF3001-2HK05B02	12.00	15.85
12	WF3001-2HK06B02	15.00	18.85
14	WF3001-2HK07B02	18.00	21.85
16	WF3001-2HK08B02	21.00	24.85
18	WF3001-2HK09B02	24.00	27.85
20	WF3001-2HK10B02	27.00	30.85
22	WF3001-2HK11B02	30.00	33.85
24	WF3001-2HK12B02	33.00	36.85

OPERATION	XX	±0.40	DRAW	JYHuang	DATE	2012/09/18	SCALE	FIT	PROJ.	PART NO.	SEE TAB
CHECK	XXX	±0.25	CHECK		DATE		UNIT	mm	PROJ.	TITLE:	3.00mm DUAL ROW HOUSING
ANGLE	XXX	±0.15	APPROVE		DATE		SIZE	A4	SHEET	CUSTOMER NO.	
CHANGE			APPROVE		DATE		PROJ.	1/1			

WCON

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 8535915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com