


HSF

NOTES:


Rated Current:1.0AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-55°C to +85°C

Contact Material:Phosphor Bronze
 Contact Plating:Sn Over Ni
 Insulator Material:Thermoplastic UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

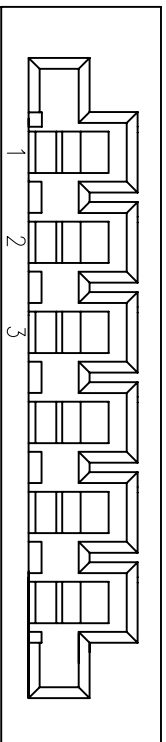

4.50±0.25
 [.177±0.010]

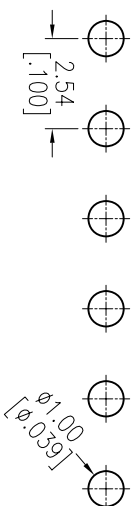


Ordering Information

5110-XX S D D N X T 01

No.of Pins
 03-27P

Color
 A=Brown
 B=Black
 W=White
 E=Beige

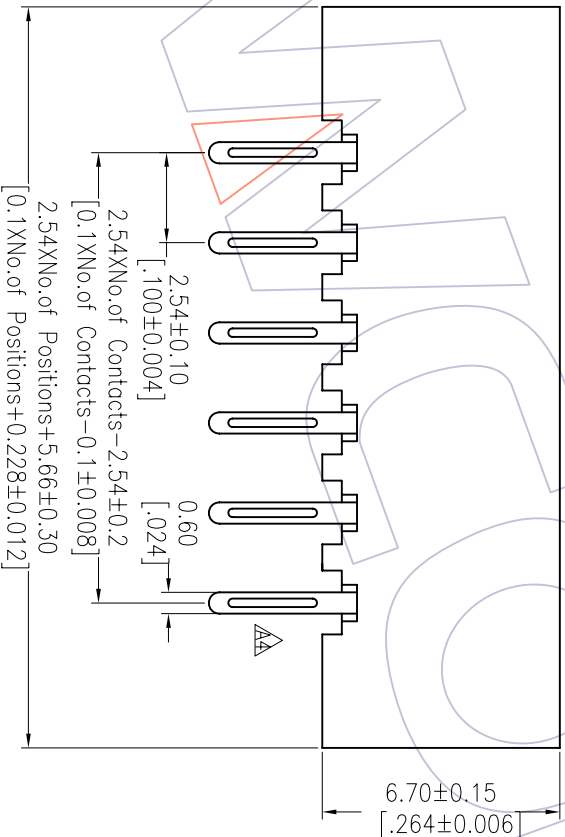

3.20±0.25
 [.126±0.010]

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	MYQ	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
					X.XX	±0.40								
A4	11/11/17	3.00 → 3.20 4.55 → 4.50 0.65 → 0.60			X.X	±0.40			11/11/17	FIT		5110-XXSDDNXT01	WAPE HARDWARE ELECTRONICS CO. LTD	
A3	11/07/1	Modify Drawing			X.XX	±0.25	DESIGN			mm				
A2	10/12/02	5110-XXSDDNX01 → 5110-XXSDDNWT01			X.XXX	±0.15	CHECK			A4				
A1	09/08/11	3.20 → 3.00			Angle	± 3'				1/1			2.54 FPC 180° DIP DIAL CONTACT W/O LOCK	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE							

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD