
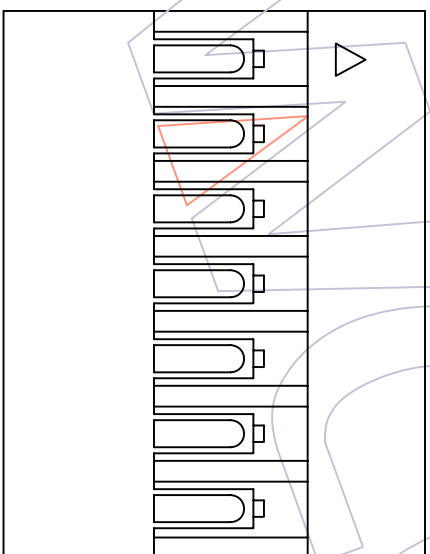


HSP

NOTES:

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C

Insulator Material: PBT+30%G.F UL94V-0
 Use with: WF2543-T
 Mated with: WF2543-Wafer

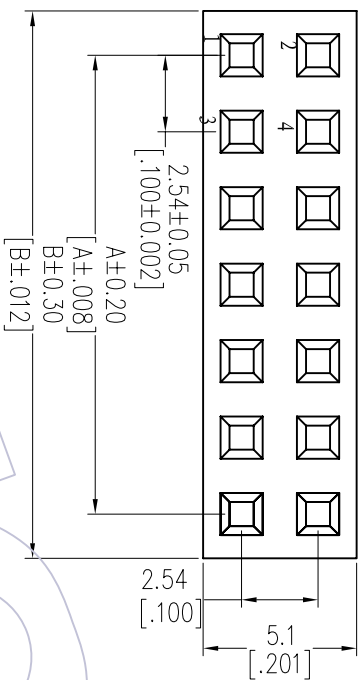

Ordering Information

WF2543 - 2 H XX X 0 1

No. of Row: 2
 No. of pins: 20
 Color: W=White, 0=PE Bag, B=Black
 Dual Row: 01P-20P
 Packing: W=White, 0=PE Bag, B=Black

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	△B
2x01	WF2543-2H01X01	2.54	2.54
2x02	WF2543-2H02X01	2.54	5.08
2x03	WF2543-2H03X01	5.08	7.62
2x04	WF2543-2H04X01	7.62	10.16
2x05	WF2543-2H05X01	10.16	12.70
2x06	WF2543-2H06X01	12.70	15.24
2x07	WF2543-2H07X01	15.24	17.78
2x08	WF2543-2H08X01	17.78	20.32
2x09	WF2543-2H09X01	20.32	22.86
2x10	WF2543-2H10X01	22.86	25.40
2x11	WF2543-2H11X01	25.40	27.94
2x12	WF2543-2H12X01	27.94	30.48
2x13	WF2543-2H13X01	30.48	33.02
2x14	WF2543-2H14X01	33.02	35.56
2x15	WF2543-2H15X01	35.56	38.10
2x16	WF2543-2H16X01	38.10	40.64
2x17	WF2543-2H17X01	40.64	43.18
2x18	WF2543-2H18X01	43.18	45.72
2x19	WF2543-2H19X01	45.72	48.26
2x20	WF2543-2H20X01	48.26	50.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2012/11/19	MODIFY DIM "B"	
AO	2012/09/08	NEW	

OPERATION	SCALE	FIT	PART NO.
XX ±0.40	UNIT	mm	SEE TAB
XX ±0.25	SIZE	A4	TITLE:
XXX ±0.15	SHEET	1/1	DUAL ROW 2.54 HOUSING
Angle ± 3°	PROJ.	1/1	Customer NO.

DRAW	DATE	CHECK	DATE
JYHuang	2012/11/19		
APPROVE	DATE		



WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com