

# HSF


NOTES:  
 Current Rating: 3.0AMP  
 Voltage Rating: 250V  
 Contact Resistance: 10mΩ Max  
 Withstand Voltage: 750V AC/DC/Minute  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -25°C to +85°C

Contact Material: Brass  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: Nylon66 UL94-V2

## Ordering Information

WF2545B-HI XX W 0 X

No. of Pins      Color      Packing  
 02P-17P      W= White      0=PE Bag

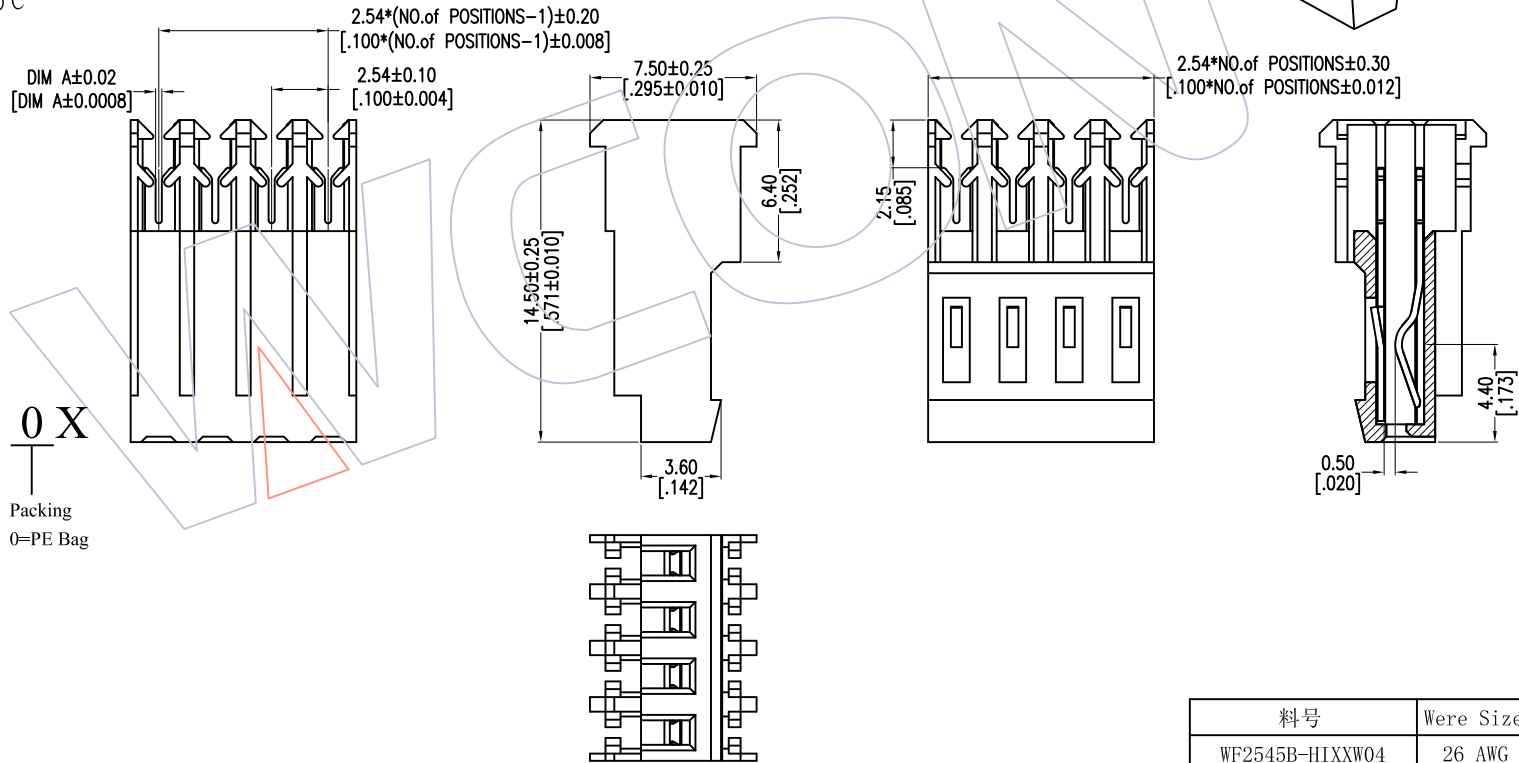

料号	Were Size	DIM A
WF2545B-HIXXW04	26 AWG	0.28
WF2545B-HIXXW05	24 AWG	0.34
WF2545B-HIXXW06	22 AWG	0.48

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
AO	2016.10.20	NEW	-----	x.x    ±0.40	DingWenMin	2016.10.20	UNIT    mm		WF2545B-HIXXW0X
				x.xx   ±0.25	CHECK	DATE	SIZE    A4		TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET 1/1		2.54mm Wafer CONN, IDC Type
				Angle ± 3'			PROJ.		Customer NO.
				DIM    TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--