
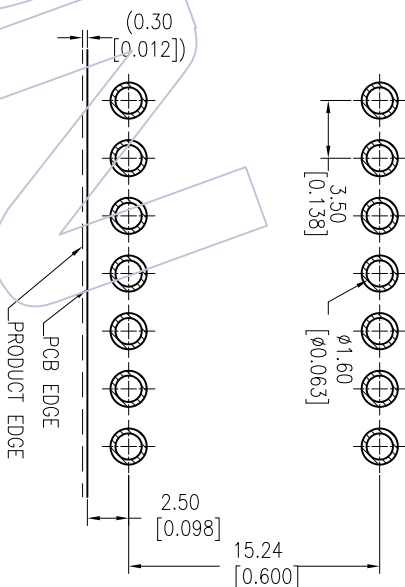


HSF

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: PA66+30%GF(UL94V-0)
 - 1.2 COVER: PA66+30%GF(UL94V-0)
 - 1.3 TERMINAL: BRASS, MATTE TIN PLATED OVER NICKEL
2. ELECTRICAL:
 - 2.1 CURRENT RATING: 8 A
 - 2.2 VOLTAGE RATING: 300 V
 - 2.3 CONTACT RESISTANCE: 8 mΩ MAX.
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE: 2000V AC
 - 2.5 INSULATION RESISTANCE: 1000 MΩ MIN
3. ENVIRONMENTAL:
 - 3.1 OPERATION TEMPERATURE: -40°C TO +105°C
4. No. OF POSITIONS: 2~20
5. ALL MATERIALS SHOULD BE COMPLIANT TO ROHS

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

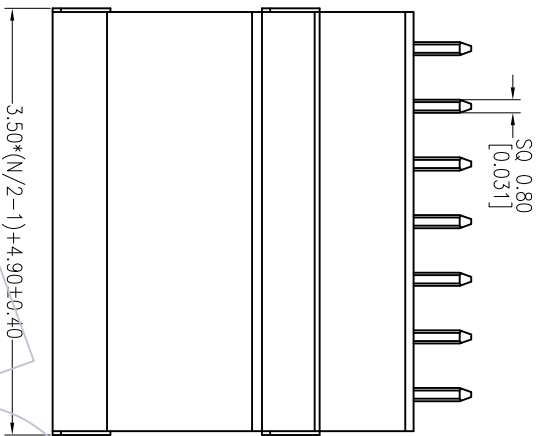




Ordering Information:

P M 350 - 3 S XX A SM 1 N

M=Male Pitch 350=3.50

No. of Pins (Per Row) A=Green S=White Tin

Contact Plated Series No.

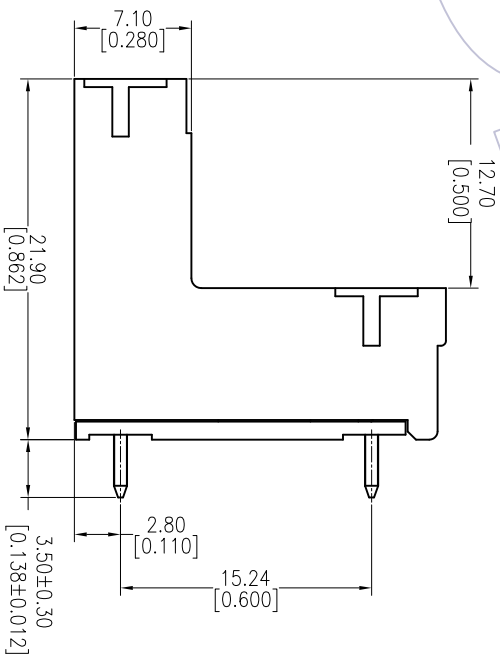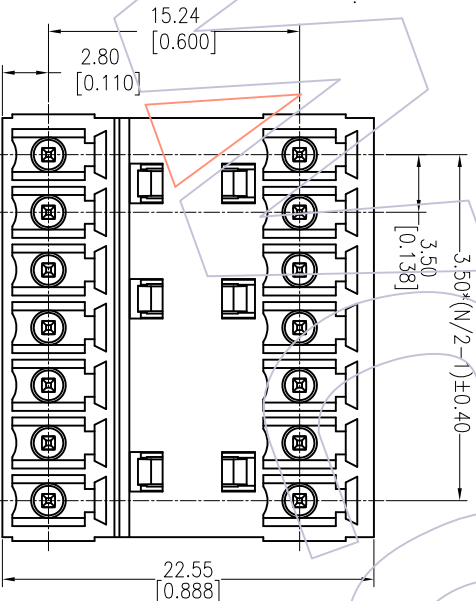

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2013/09/17	NEW		XX ±0.40	Tsingn	2013/09/17	UNIT mm	inch	PM381-3SXXASMIN	3.50mm Pitch Male Pluggable Terminal Blocks With Double Stagger Tier	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
				XXX ±0.25	CHECK	DATE	SIZE	A4			Http: www.wcon.com	
				XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.			
				Angle ± 3°	PROJ.							
				TOL								

WCON

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com