

HSF

NOTES:

- 1. MATERIAL:**
- 1.1 HOUSING:PA66+30%GF(Ul94V-0)
 - 1.2 COVER:PA66+30%GF(Ul94V-0)
 - 1.3 TERMINAL:BRASS,MATTE TIN PLATED OVER NICKEL
- 2. ELECTRICAL:**
- 2.1 CURRENT RATING: 8 A
 - 2.2 VOLTAGE RATING: 300 V
 - 2.3 CONTACT RESISTANCE:8 mΩ MAX.
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE:2000V AC
 - 2.5 INSULATION RESISTANCE:1000 MΩ MIN
- 3. ENVIRONMENTAL:**
- 3.1 OPERATION TEMPERATURE:-40°C TO +105°C
 4. No. OF POSITIONS:2~20
 5. ALL MATERIALS SHOULD BE COMPLIANT TO ROHS

Ordering Information:




P M 350 - 3 R XX A SM I N

M=Male Pitch
350=3.50


No. of Pins
(Per Row)
02,20P

Color
A=Green SM=Matte Tin

Contact Plated
Series No.

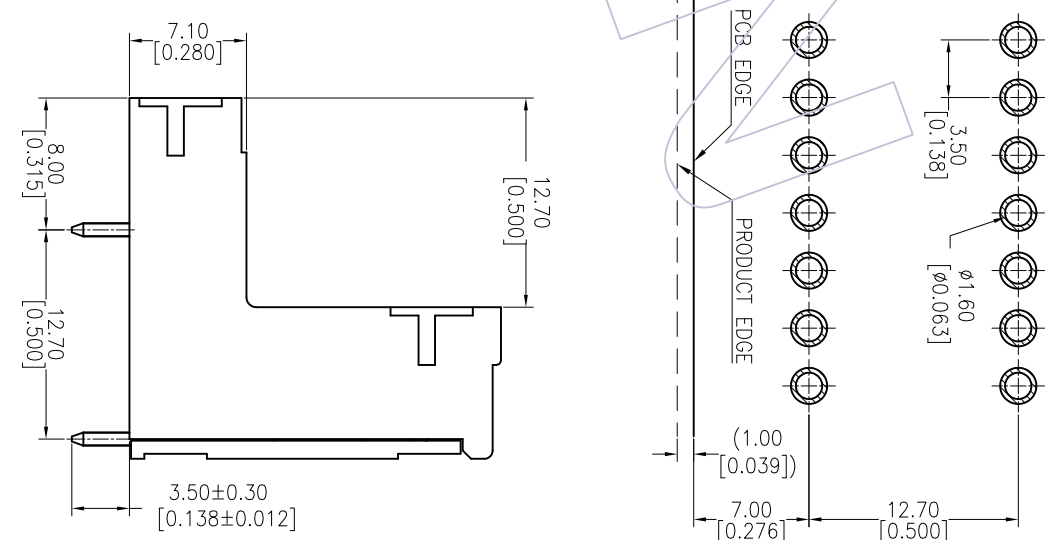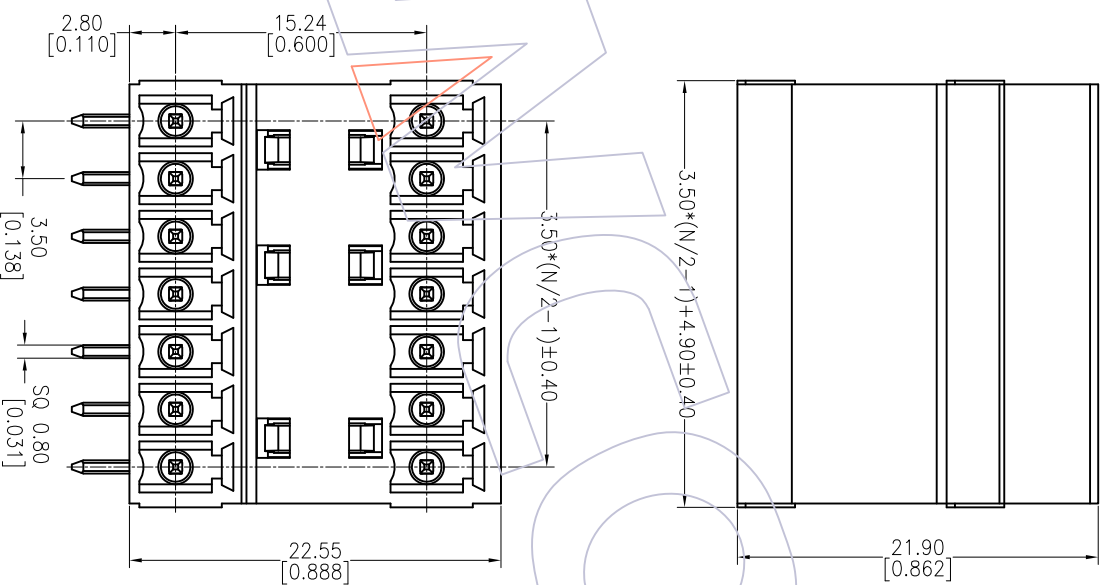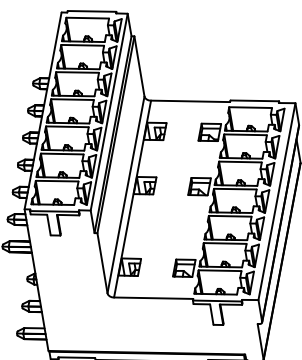

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

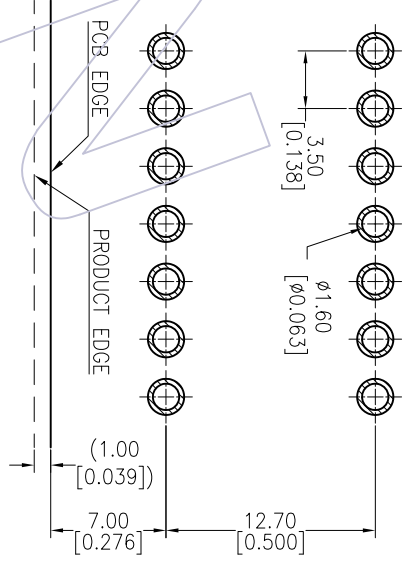

OPERATION		DRAW		PART NO.		<p>PM381-3RXXASMIN</p> <p>TITLE: 3.50mm Pitch Male Pluggable Terminal Blocks With Double Stagger Tier</p> <p>Customer NO.</p>			
XX	±0.40	Tsingn	DATE	SCALE	FIT				
XX	±0.25	CHECK	2013/09/17	UNIT	mm				
XX	±0.15	DATE		SIZE	A4				
XX	± 3°	APPROVE	DATE	SHEET	1/1				
XX		PROJ.							
MODIFICATION DESCRIPTION		CHANGE		<p>WCON</p> <p>Http: www.wcon.com</p> <p>WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com</p> <p>WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com</p>					
REV	DATE								
A0	2013/09/17	NEW							