


HSF

NOTES:
 Rated Current: 1.0AMP
 Rated Voltage: 100V AC/DC
 Contact Resistance: 20mΩ max
 Withstand Voltage: 250V AC/Minute
 Insulation Resistance: 100MΩ min
 Operation Temperature: -25°C to +85°C

Ordering Information

WF 1251 - TP XX 0 1

- Contact Plating
- G0=Gold Flash
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- S0=Gold Flash/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- SS=30u"Gold/Tin
- SN=Tim

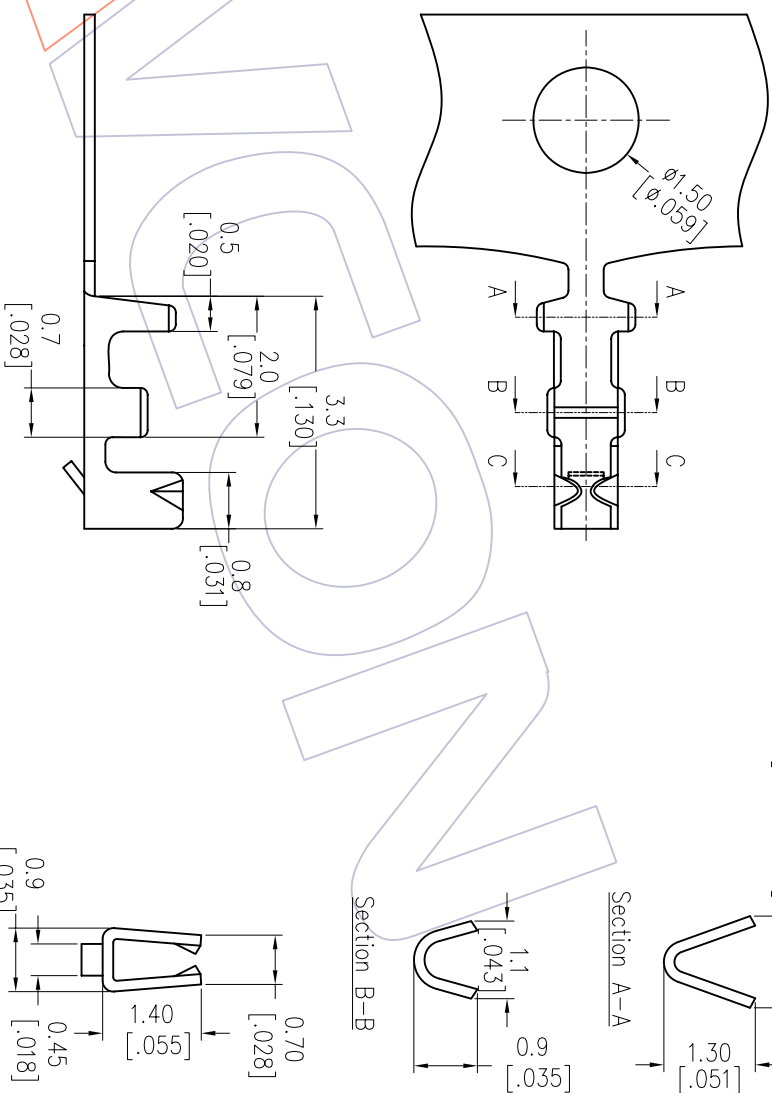

Specification & Ordering Information:

Part No.	Thickness	Material	Finish	Wire Range	Insulation O.D	Qty/Reel
WF1251-TPSN01	0.15	Phosphor bronze	Tin-Plated	AWG#28~#32	1.05~1.20mm	15,000PCS

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
AO	2012/09/05	NEW		XX ±0.40	JYHuang	2012/09/05	UNIT mm	A4	SEE TAB	"M"TYPE 1.25 WAFER TERMINAL	Tel: +86 769 85358920	Tel: +86 512 57468408
				XXX ±0.25	CHECK	DATE	SIZE	1/1		Customer NO.	Fax: +86 769 85358915	Fax: +86 512 57468468
				XXX ±0.15	APPROVE	DATE	SHEET				E-mail: sales@wcon.com	E-mail: sales@wcon.com
				Angle ± 3'			PROJ.					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com