


NOTES:

Rating Voltage:250V AC/DC
 Current Rating:1.0AMP
 Contact Resistance:10mΩ max
 Withstand Voltage:250V AC/DC
 Insulation Resistance:100MΩ min
 Operation Temperature:-25℃ to +85℃
 Contact Material:Brass
 Contact plating:Au Or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0

Ordering Information

WF1253 - WM XX XX 1

No.of pins Contact Plating Color Packing
 10=10pin S0=Gold Flash/Tin B=Black T=Tube
 20=20pin S1=100°C/Gold/Tin E=Beige P=Tube+CAP
 30=30pin S4=150°C/Gold/Tin T=Natural R=Tube+CAP
 40=40pin S5=300°C/Gold/Tin W=White R=Tube+CAP
 50=50pin G=Gold Flash
 G3=100°C Cold
 G4=150°C Cold
 G5=300°C Cold
 Blank=Tin

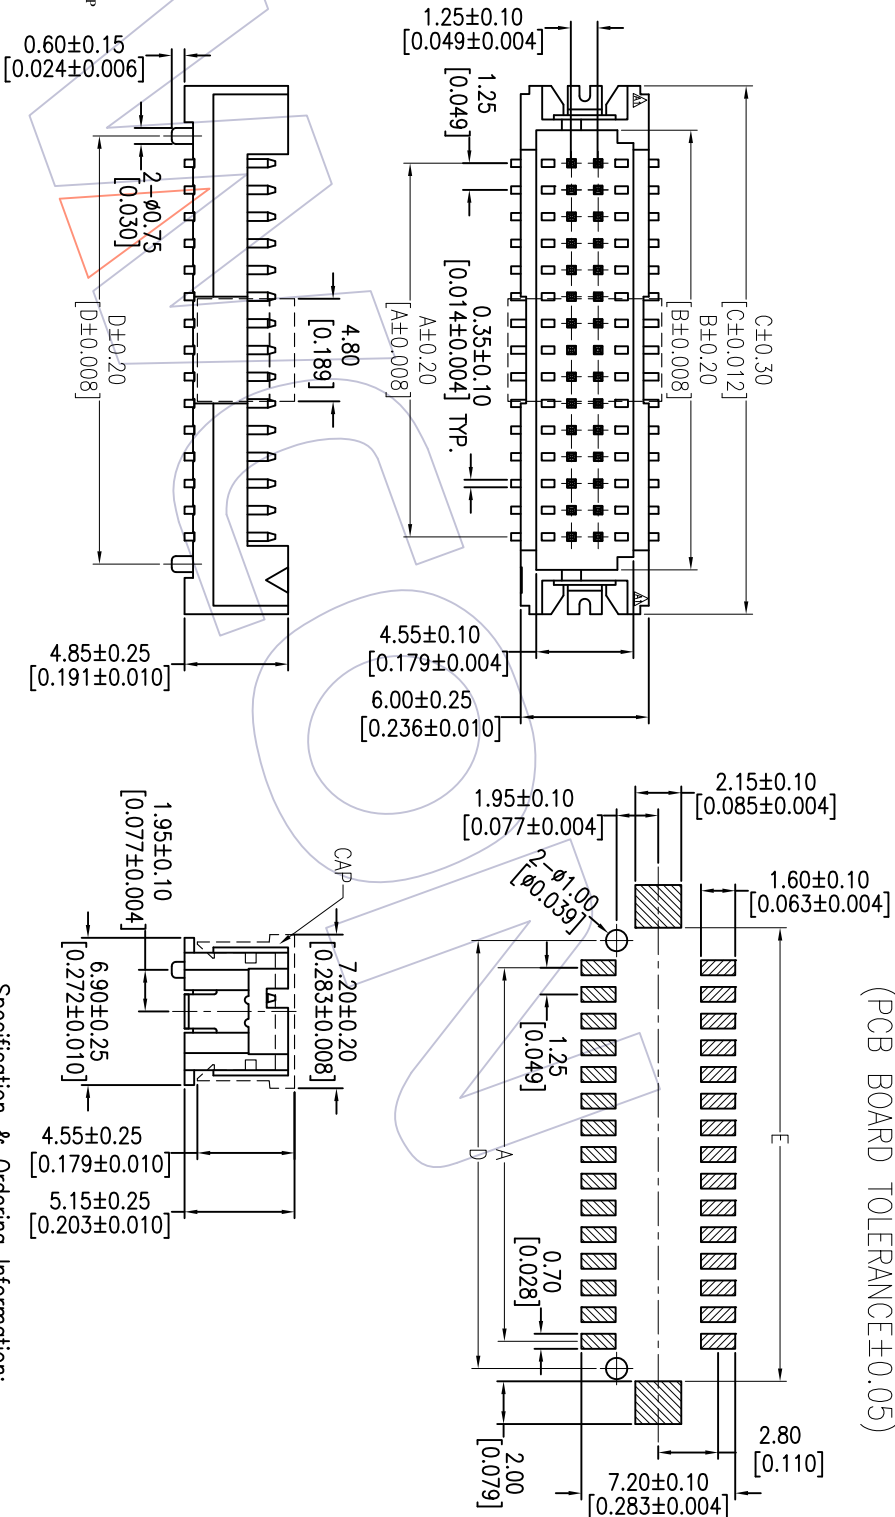

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Specification & Ordering Information:

Circuit	Part No.	Dimension				
		A	B	C	D	E
10	WF1253-WM10XT1	5.00	8.10	12.25	7.55	8.75
20	WF1253-WM20XT1	11.25	14.35	18.50	13.80	15.00
30	WF1253-WM30XT1	17.50	20.60	24.75	20.05	21.25
40	WF1253-WM40XT1	23.75	26.85	31.00	26.30	27.50



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	DingWenMin	2016/10/14	mm	1/1	SEE TAB
XX	CHECK	DATE	UNIT	SIZE	TITLE:
XX			A4	A4	1.25 WAFER SWT
XX	APPROVE	DATE	SHEET	PROJ.	Customer NO.
Angle			1/1		
± 3'					
± 0.15					
± 0.25					
± 0.40					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2016/10/14	以实物修改图面	A1
AO	2012/09/05	NEW	