HSF

NOTES:
Rated Current:1.0AMP
Rated Voltage:150V AC/DC
Contact Resistance:30mΩ max
Withstand Voltage:500V AC/Minute
Insulation Resistance:500MΩ min
Operation Temperature:-25℃ to +85℃

Insulator Material:PA66 UL94V-0

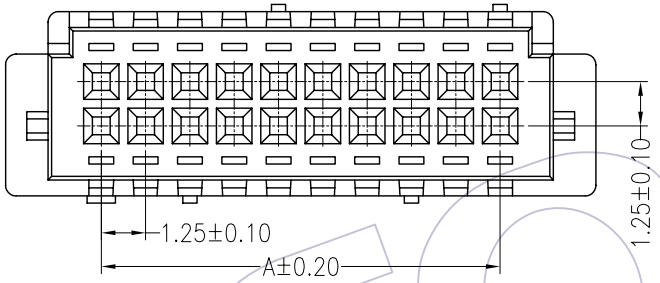

Ordering Information

WF 1253 - H XX X 0 1

- No.of pins: 10=10P, 14=14P, 20=20P, 30=30P, 40=40P
- Color: E=Beige, W=White
- Packing: 0=PE Bag

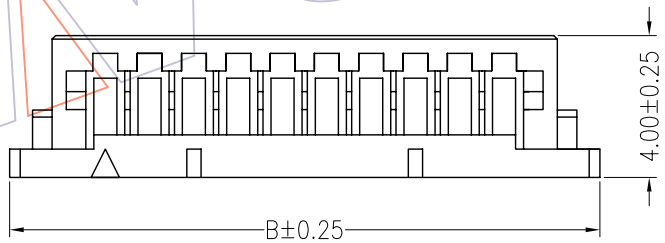



Specification & Ordering Information:

Circuit	Part No.	Dimension A	Dimension B
10	WF1253-H10X01	5.00	10.40
14	WF1253-H14X01	7.50	12.90
20	WF1253-H20X01	11.25	16.65
30	WF1253-H30X01	17.50	22.90
40	WF1253-H40X01	23.75	29.15

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/07/29	NEW	———	———

OPERATION	
X.X	±0.25
X.XX	±0.15
X.XXX	±0.05
Angle	± 3°
DIM	TOL

DRAW	William Chen	08.07.29
DESIGN		
CHECK		
APPROVE		

SCALE	1:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	SEE TAB
TITLE:	1.25mm HOUSING
Customer NO.	

WCON