
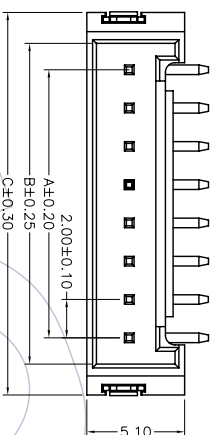


HSP

NOTES:

Rated Current:2A
 Rated Voltage:125V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:250V AC/Minute
 Insulation Resistance:500MΩ min
 Operation Temperature:-25°C to+85°C




Contact Material:Brass
 Contact Plating:Au or Sn over Ni
 Insulator Material:High Temperature Plastic(UL94V-0)




Ordering Information

WF2005 - WM XX X X 1

No. of pins Color Packing
 02P-16P E=Beige 0=PE Bag
 W=White T=Tube
 B=Black

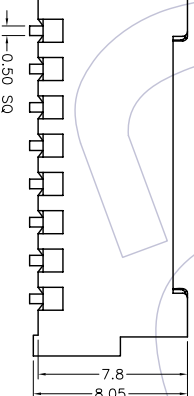

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)

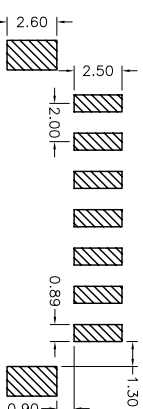

Dimensional & Ordering Information

Circuit	Part No.	Dimension					Q'ty Bag
		A	B	C	D	E	
02	WF2005-WM02XX1	2.0	4.8	6.0	—	—	1000
03	WF2005-WM03XX1	4.0	6.8	8.0	2.0	4.80	1000
04	WF2005-WM04XX1	6.0	8.8	10.0	4.0	6.80	1000
05	WF2005-WM05XX1	8.0	10.8	12.0	6.0	8.80	1000
06	WF2005-WM06XX1	10.0	12.8	14.0	8.0	10.80	1000
07	WF2005-WM07XX1	12.0	14.8	16.0	10.0	12.80	1000
08	WF2005-WM08XX1	14.0	16.8	18.0	12.0	14.80	1000
09	WF2005-WM09XX1	16.0	18.8	20.0	14.0	16.80	1000
10	WF2005-WM10XX1	18.0	20.8	22.0	16.0	18.80	1000
11	WF2005-WM11XX1	20.0	22.8	24.0	18.0	20.80	1000
12	WF2005-WM12XX1	22.0	24.8	26.0	20.0	22.80	1000
13	WF2005-WM13XX1	24.0	26.8	28.0	22.0	24.80	1000
14	WF2005-WM14XX1	26.0	28.8	30.0	24.0	26.80	1000
15	WF2005-WM15XX1	28.0	30.8	32.0	26.0	28.80	1000
16	WF2005-WM16XX1	30.0	32.8	34.0	28.0	30.80	1000

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

OPERATION	DRAW	BILL LIN	SCALE	UNIT	SIZE	SHEET	PROJ.
X.X	DESIGN	2008/09/03	1:1	mm	A4	1/1	Customer NO.
X.XX	CHECK						
X.XXX	APPROVE						
Angle							
± .3'							
DIM							
TOL							
APPROVE							
CHANGE							
DESCRIPTION							
MODIFICATION							
DATE							
NEW							
ADD DIMENSION D&E							
09/09/03							
09/09/03							
REV							
DATE							