

HSF

RECOMMENDED PCB LAYOUT
TOLERANCE IS ±0.05


NOTES:

- Current Rating: 1.0A AMP
- Contact Resistance: 20milliohm Max
- Withstand Voltage: 250V AC/Minute
- Insulation Resistance: 500Megohm Min
- Operation Temperature: -25°C to +85°C
- Housing Material: PA6T(UL94V-0)
- Contact Material: Brass
- Contact plating: Sn over Ni Plating

Ordering Information

WF2006- WR XX X T 1

Terminal shape: WR-Water 90° DIP
NO. of Pins : 2P~15P
Color: T=Tube
E=Beige

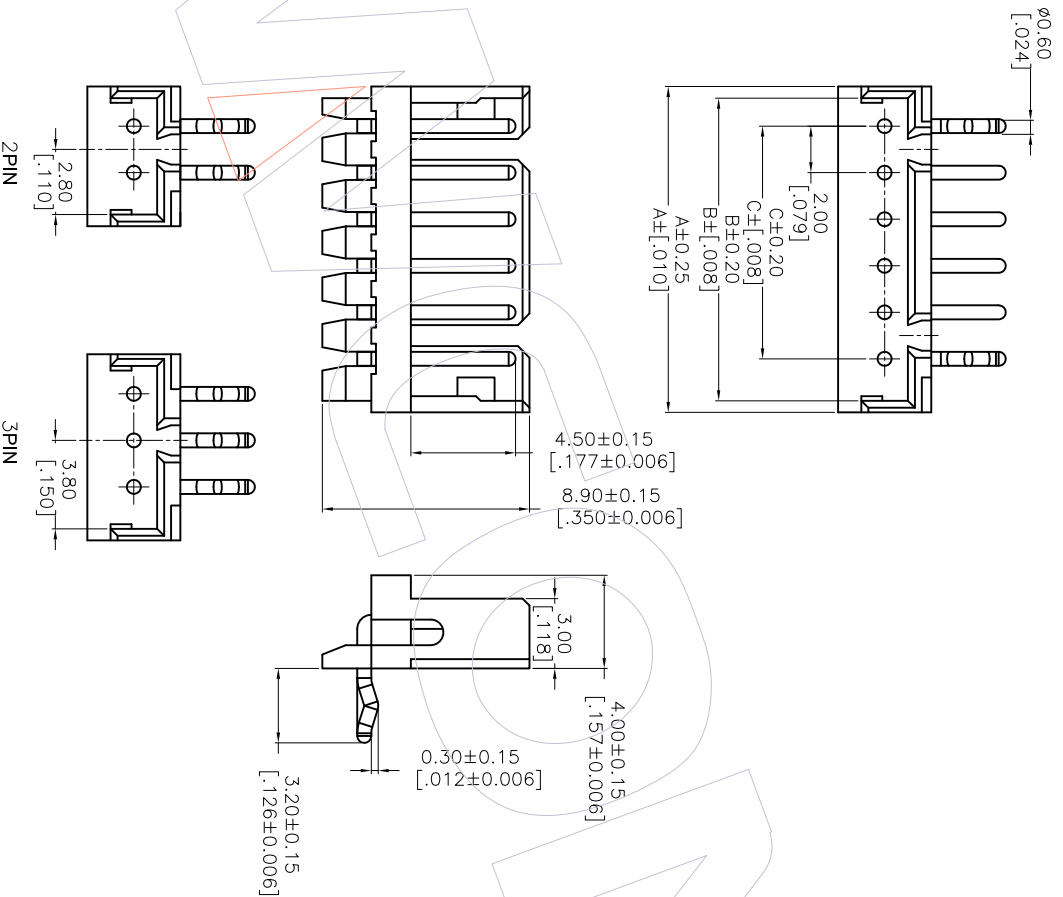

Circuits	Part No.	Dimensions		
		A	B	C
2	WF2006-WR02X01	6.00[.236]	5.00[.197]	2.00[.079]
3	WF2006-WR03X01	8.00[.315]	7.00[.276]	4.00[.157]
4	WF2006-WR04X01	10.00[.394]	9.00[.354]	6.00[.236]
5	WF2006-WR05X01	12.00[.472]	11.00[.433]	8.00[.315]
6	WF2006-WR06X01	14.00[.551]	13.00[.512]	10.00[.394]
7	WF2006-WR07X01	16.00[.630]	15.00[.591]	12.00[.472]
8	WF2006-WR08X01	18.00[.709]	17.00[.669]	14.00[.551]
9	WF2006-WR09X01	20.00[.787]	19.00[.748]	16.00[.630]
10	WF2006-WR10X01	22.00[.866]	21.00[.827]	18.00[.709]
11	WF2006-WR11X01	24.00[.945]	23.00[.906]	20.00[.787]
12	WF2006-WR12X01	26.00[1.024]	25.00[.984]	22.00[.866]
13	WF2006-WR13X01	28.00[1.102]	27.00[1.063]	24.00[.945]
14	WF2006-WR14X01	30.00[1.181]	29.00[1.142]	26.00[1.024]
15	WF2006-WR15X01	32.00[1.260]	31.00[1.220]	28.00[1.102]

OPERATION	SCALE	PART NO.
X.X ±0.40	1:1	WF2006-WRXXXXT1
X.XX ±0.25	mm	
X.XXX ±0.15	inch	
Angle ± 3'	SHEET 1/1	
DIM TOL	PROJ.	

OPERATION	CHECK	DATE	SCALE	PART NO.
X.X ±0.40	KH	2012.12.13	1:1	WF2006-WRXXXXT1
X.XX ±0.25	CHECK		mm	
X.XXX ±0.15	APPROVE		inch	
Angle ± 3'	DATE		A4	
DIM TOL	SHEET		1/1	
	PROJ.			



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2015.05.13	NEW	-
1			

WCON - Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON - Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com