
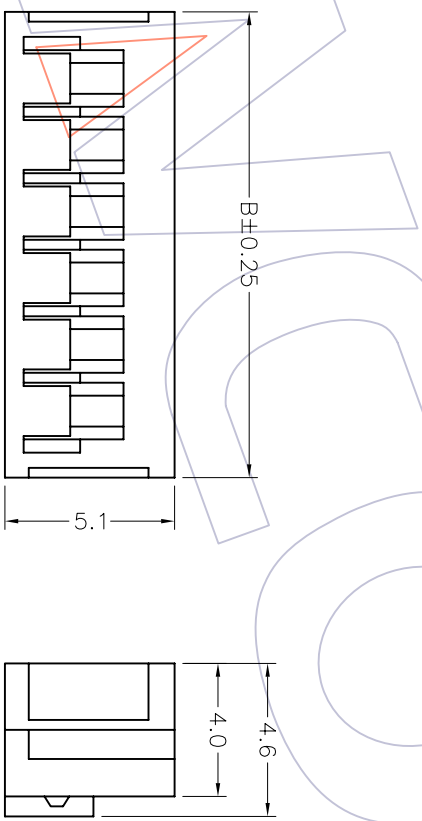


HSF

NOTES:
 Rated Current:1.0A
 Rated Voltage:100V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:250V AC/Minute
 Insulation Resistance:500MΩ min
 Operation Temperature:-25°C to+85°C
 Material:PA66 UL94V-0

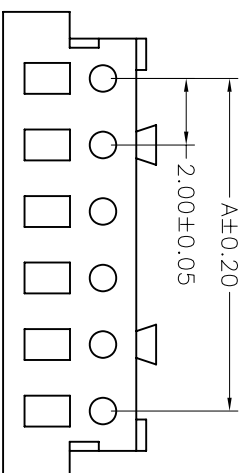

Ordering Information

WF2006 - H XX X 01

No.of pins
02P~15P

Color
E=Beige
W=White
B=Black
N=Brown

Packaging
0=P/E Bag

Dimensional & Ordering Information

Circuit	Part No.	Dimension		
		A	B	C
02	WF2006-H02X01	2.00	6.00	2.8
03	WF2006-H03X01	4.00	8.00	4.8
04	WF2006-H04X01	6.00	10.00	6.8
05	WF2006-H05X01	8.00	12.00	8.8
06	WF2006-H06X01	10.00	14.00	10.8
07	WF2006-H07X01	12.00	16.00	12.8
08	WF2006-H08X01	14.00	18.00	14.8
09	WF2006-H09X01	16.00	20.00	16.8
10	WF2006-H10X01	18.00	22.00	18.8
11	WF2006-H11X01	20.00	24.00	20.8
12	WF2006-H12X01	22.00	26.00	22.8
13	WF2006-H13X01	24.00	28.00	24.8
14	WF2006-H14X01	26.00	30.00	26.8
15	WF2006-H15X01	28.00	32.00	28.8

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD

OPERATION	DRAW	WEIXD	SCALE	PART NO.	SBE TAB
X.X	DESIGN	08/08/04	1:1		
X.XX	CHECK		mm		
X.XXX	CHECK		A4		
Angle	CHECK		1/1	TITLE:	2.00 HOUSING
± 3'	APPROVE		PROJ.	Customer NO.	

REV DATE MODIFICATION DESCRIPTION CHANGE APPROVE DIM TOL

1 2 3 4 5 6 7 8 9 10