
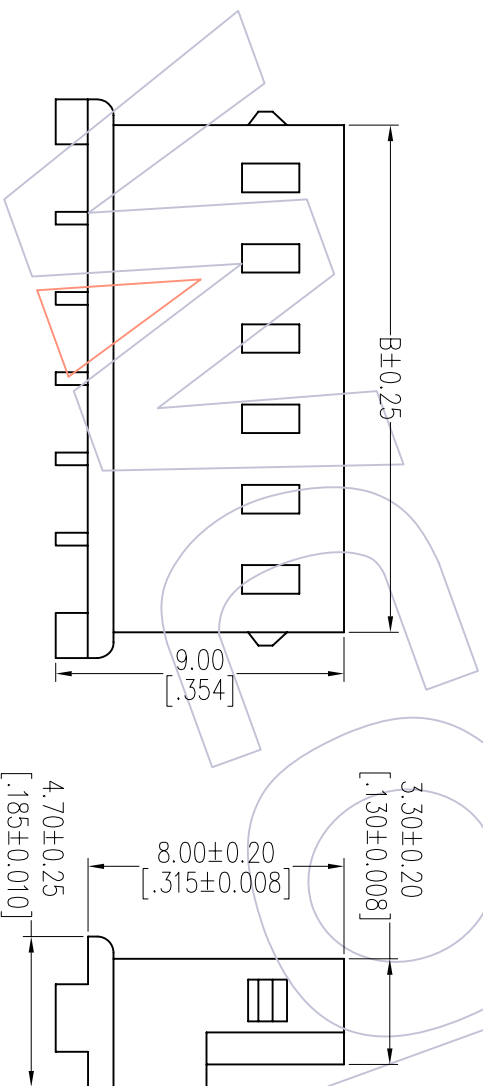


HSP

NOTES:

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 800V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C

Use with: WF2502-T
 Mated With: WF2502-Wafer
 Insulator Material: PA9T+30%G.F UL94V-0

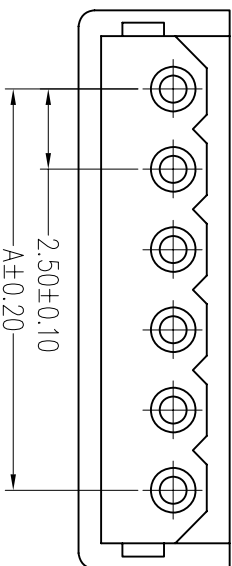

Ordering Information

WF2502-H XX X 01

No. of Pins Colour
 02P-16P E=Beige
 W=White

Dimensional & Ordering Information

Circuit	Part No.	Dimension		Q'Ty /Bag
		A	B	
02	WF2502-H02X01	2.5	5.8	1,000
03	WF2502-H03X01	5.0	8.3	1,000
04	WF2502-H04X01	7.5	10.8	1,000
05	WF2502-H05X01	10.0	13.3	1,000
06	WF2502-H06X01	12.5	15.8	1,000
07	WF2502-H07X01	15.0	18.3	1,000
08	WF2502-H08X01	17.5	20.8	1,000
09	WF2502-H09X01	20.0	23.3	1,000
10	WF2502-H10X01	22.5	25.8	1,000
11	WF2502-H11X01	25.0	28.3	1,000
12	WF2502-H12X01	27.5	30.8	1,000
13	WF2502-H13X01	30.0	33.3	1,000
14	WF2502-H14X01	32.5	35.8	1,000
15	WF2502-H15X01	35.0	38.3	500
16	WF2502-H16X01	37.5	40.8	500

OPERATION	±0.40	DRAW	JYHuang	DATE	2012/09/05	SCALE	FIT
X.XX	±0.25	CHECK		DATE		UNIT	mm
X.XX	±0.15	APPROVE		DATE		SIZE	A4
X.XXX	±0.15	PROJ.				SHEET	1/1
Angle	± 3'						
DIM	TOL						

PART NO. SEE TAB

TITLE: "M"TYPE 1.25 Wafer 90° DIP

Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
AO	2012/09/05	NEW	