


HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 50mΩ Max
 Withstand Voltage: 800V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -25°C to +85°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT(W/O G.F) UL94V-0

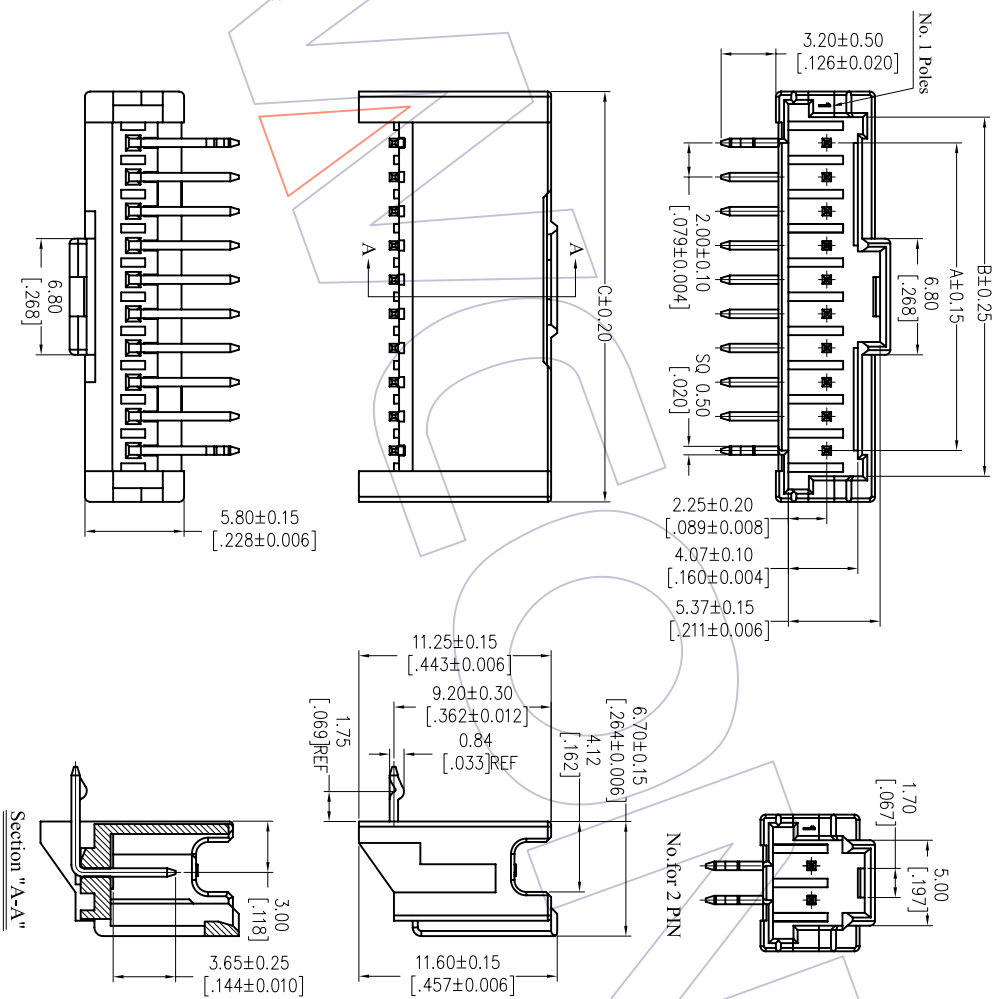

Ordering Information

WF2007 - WR XX W 0 1

No. of pins Contact Plating Color Packing
 02-15P S0=Gold Flash/Tin B=Black 0=PE Bag
 S3=10u"Gold/Tin W=White
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 Blank=Tin

Specification & Ordering Information:

Circuit	Part No.	Dimension			Qty /Bag
		A	B	C	
02	WF2007-WR02W01	2.0	5.0	8.0	1,000
03	WF2007-WR03W01	4.0	7.0	10.0	1,000
04	WF2007-WR04W01	6.0	9.0	12.0	500
05	WF2007-WR05W01	8.0	11.0	14.0	500
06	WF2007-WR06W01	10.0	13.0	16.0	400
07	WF2007-WR07W01	12.0	15.0	18.0	400
08	WF2007-WR08W01	14.0	17.0	20.0	400
09	WF2007-WR09W01	16.0	19.0	22.0	250
10	WF2007-WR10W01	18.0	21.0	24.0	250
11	WF2007-WR11W01	20.0	23.0	26.0	250
12	WF2007-WR12W01	22.0	25.0	28.0	250
13	WF2007-WR13W01	24.0	27.0	30.0	200
14	WF2007-WR14W01	26.0	29.0	32.0	200
15	WF2007-WR15W01	28.0	31.0	34.0	200

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
AO	2012/09/05	NEW		XX	JYHuang	2012/09/05	mm	A4	SEE TAB
				XXX	CHECK	DATE	SIZE	SHEET	TITLE:
				XXX	±0.25		A4	1/1	"M" TYPE 2.0 Wafer 90° DIP
				XXX	±0.15				Customer NO.
				Angle	± 3°				
				DIM	TOL				

WCON

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

