

HSF

NOTES:


- Rated Voltage:125V AC/DC
- Rated Current:2.0AMP
- Contact Resistance:20mΩ Max
- Withstand Voltage:800V AC/minute
- Insulation Resistance:1000MΩ Min
- Operation Temperature:-25°C to +85°C
- Contact Material:Phosphor Bronze
- Contact plating:Sn over Ni
- Insulator Material:PA66 UL94V-0

Ordering Information

WF2008-WR XX X X 1

No. of Pins per Row: 02~15P
 Insulator Color
 W= White
 B= Black
 U= Blue
 E= Beige

Packing
 0=PE Bag
 T=Tube

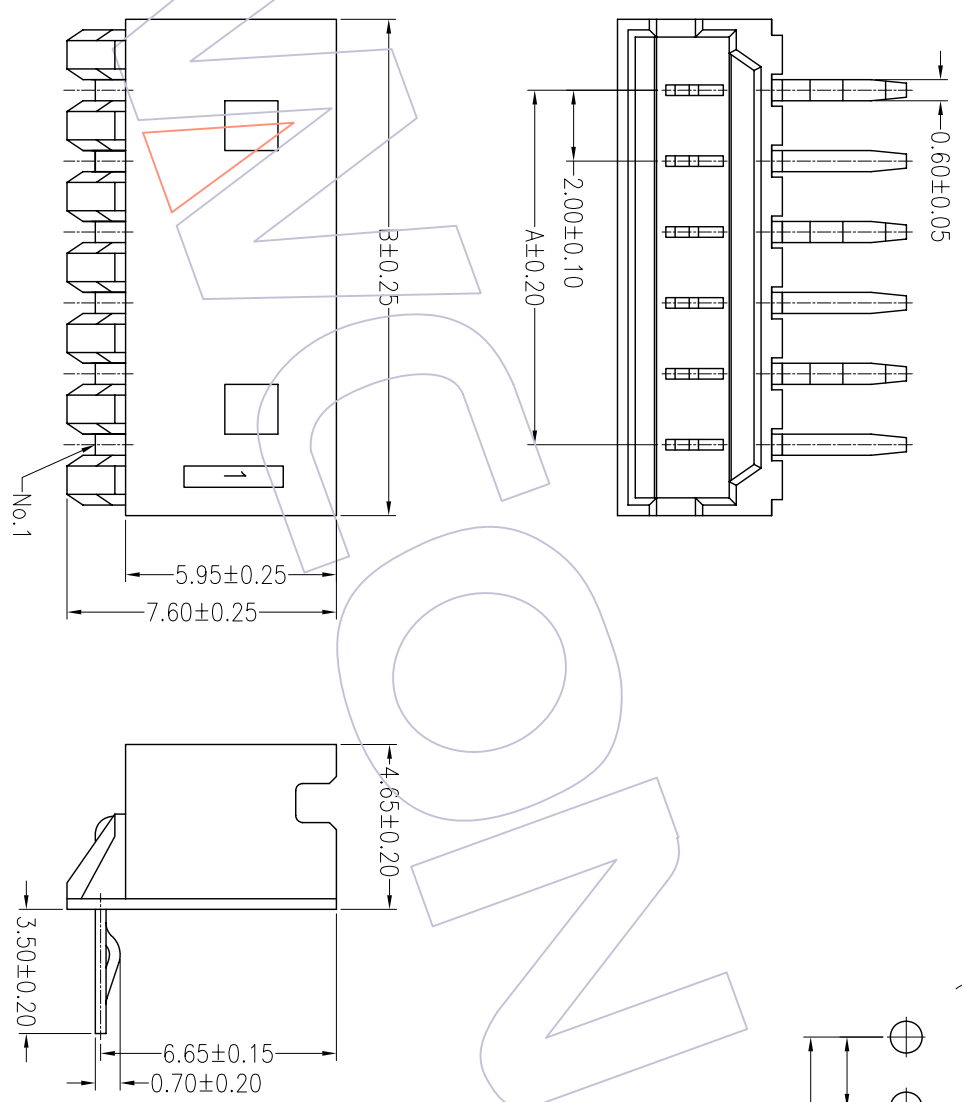

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	WF2008-WR02XX1	2.00	6.00
03	WF2008-WR03XX1	4.00	8.00
04	WF2008-WR04XX1	6.00	10.00
05	WF2008-WR05XX1	8.00	12.00
06	WF2008-WR06XX1	10.00	14.00
07	WF2008-WR07XX1	12.00	16.00
08	WF2008-WR08XX1	14.00	18.00
09	WF2008-WR09XX1	16.00	20.00
10	WF2008-WR10XX1	18.00	22.00
11	WF2008-WR11XX1	20.00	24.00
12	WF2008-WR12XX1	22.00	26.00
13	WF2008-WR13XX1	24.00	28.00
14	WF2008-WR14XX1	26.00	30.00
15	WF2008-WR15XX1	28.00	32.00

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO. LTD

OPERATION	±0.25	DRAW	08.08.07
	±0.15	DESIGN	
	±0.05	CHECK	
Angle	± 3'	APPROVE	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/08/07	NEW		

SCALE	1:1	PART NO.	
UNIT	mm	TITLE:	Customer NO.
SIZE	A4	SEE TAB	
SHEET	1/1	2.00 WAFER 90° DIP	