


HSP

NOTES:

Current Rating: 3.0A
 Voltage Rating: 250V AC,DC
 Contact Resistance: 20mΩ max
 Withstand Voltage: 800V AC/minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C

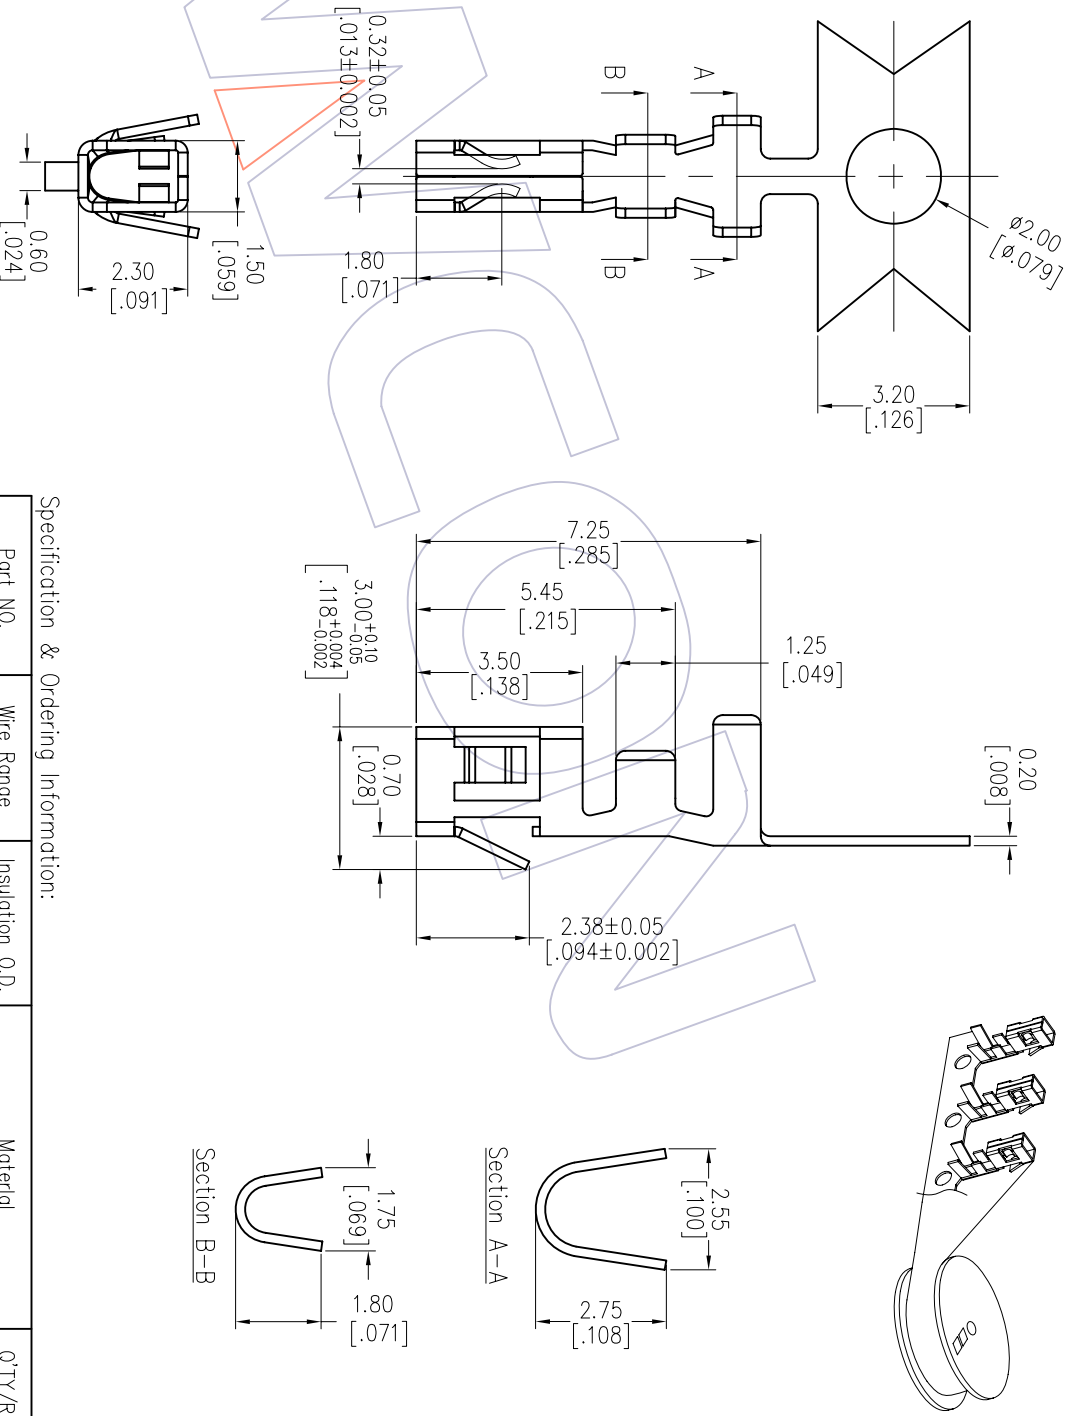

Ordering Information

WF2503-T X XX 0 X

Material
 B=Brass
 P=Phosphor bronze

Contact Plating
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

Specification & Ordering Information:

Part NO.	Wire Range	Insulation O.D.	Material	Q'TY/REEL
WF2503-TXXX0X	AWG #22~#28	1.70mm(Max.)	Brass/Phosphor bronze	10KPIN

PART NO. SEE TAB

TITLE: "M"TYPE 2.50 TERMINAL

CUSTOMER NO.



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
AO	2012/09/05	NEW		XX ±0.40	JYHuang	2012/09/05	UNIT mm		SEE TAB
				XXX ±0.25	CHECK		SIZE	A4	
				XXX ±0.15			SHEET	1/1	
				Angle ± 3°	APPROVE		PROJ.		
				TOL					

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----