



# HSF

NOTES:  
 Rated Current:3A  
 Rated Voltage:250V AC/DC  
 Contact Resistance:20mΩ max  
 Withstand Voltage:1000V AC/Minute  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-25°C to+85°C  
 Material:PA66 UL94V-0

## Ordering Information

WF2505 - H **XX** **X** 01

No.of pins  
02P~15P  
 Color  
E=Beige  
W=White  
B=Black  
N=Brown  
 Packing  
0=P/E Bag

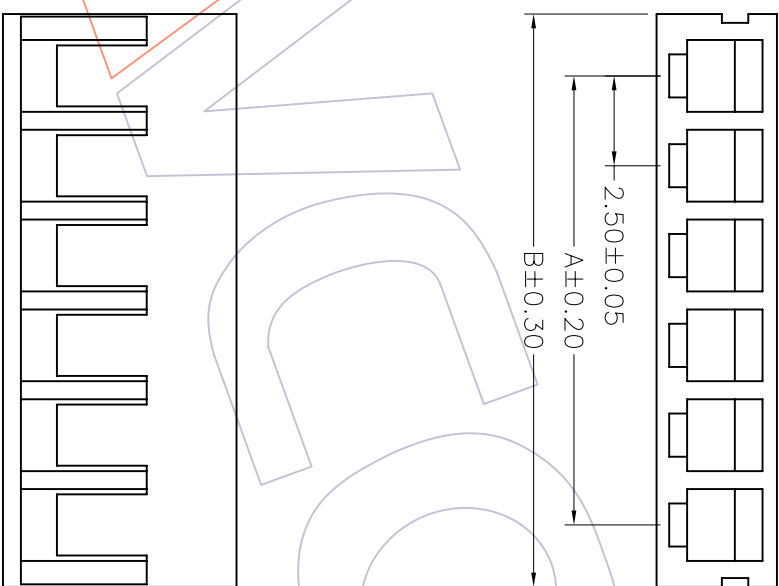

### Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
02	WF2505-H02X01	2.50	5.95
03	WF2505-H03X01	5.00	8.45
04	WF2505-H04X01	7.50	10.95
05	WF2505-H05X01	10.00	13.45
06	WF2505-H06X01	12.50	15.95
07	WF2505-H07X01	15.00	18.45
08	WF2505-H08X01	17.50	20.95
09	WF2505-H09X01	20.00	23.45
10	WF2505-H10X01	22.50	25.95
11	WF2505-H11X01	25.00	28.45
12	WF2505-H12X01	27.50	30.95
13	WF2505-H13X01	30.00	33.45
14	WF2505-H14X01	32.50	35.95
15	WF2505-H15X01	35.00	38.45

**WCON** 维峰五金电子有限公司  
 WAVE HARDWARE ELECTRONICS CO.,LTD

OPERATION	DRAW	WEIXD	SCALE	PART NO.
XXX ±0.25	DESIGN	08/08/04	1:1	
XXX ±0.15	CHECK		mm	
XXX ±0.10	CHECK		A4	
Angle ± 3'	APPROVE		1/1	TITLE:
DIM TOL			PROJ.	Customer NO.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/08/04	NEW		