

HSF


NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 100V AC/DC
 Insulation Resistance: 500MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

3712 - 30 01 C S0 X 01

Housing shape S0=Gold Flash/Ni
 C=close
 Colour
 B=Black (Std)
 R=Red
 Y=Yellow
 N=Green
 U=Blue

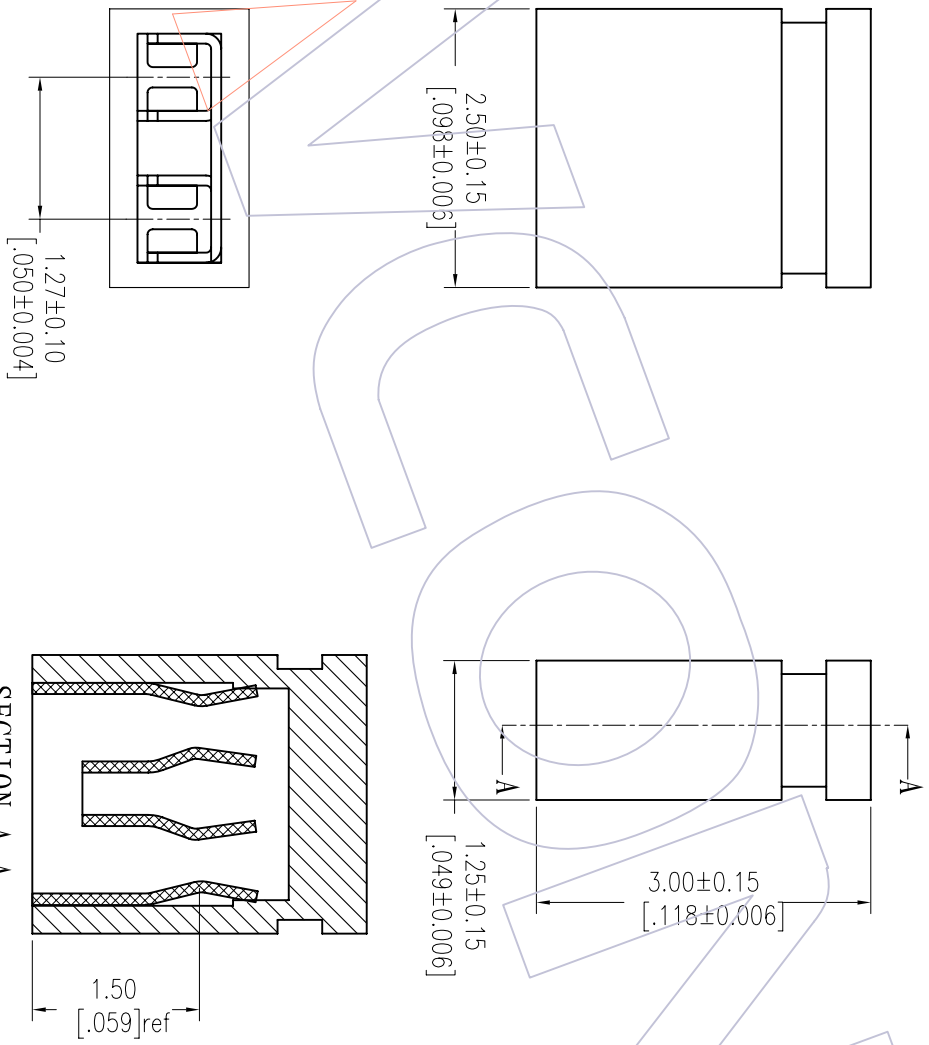

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2012/12/10	NEW	-----	XX	JYHuang	2012/12/10	mm	1/1	3712-3001CXXX01				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
				XX			mm						
				X.XXX	±0.25	CHECK	CHECK	A4					
				X.XXX	±0.15			1/1					
				Angle	± 3'	APPROVE							
				DIM	TOL								