


HSP

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:

Current Rating: 3.0AMP
Contact Resistance: 20mΩ max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 500MΩ min
Operation Temperature: -25°C to +85°C

Contact Material: Brass
Contact plating: Au Or Sn Over Ni
Insulator Material: PA66(UL94V-0)

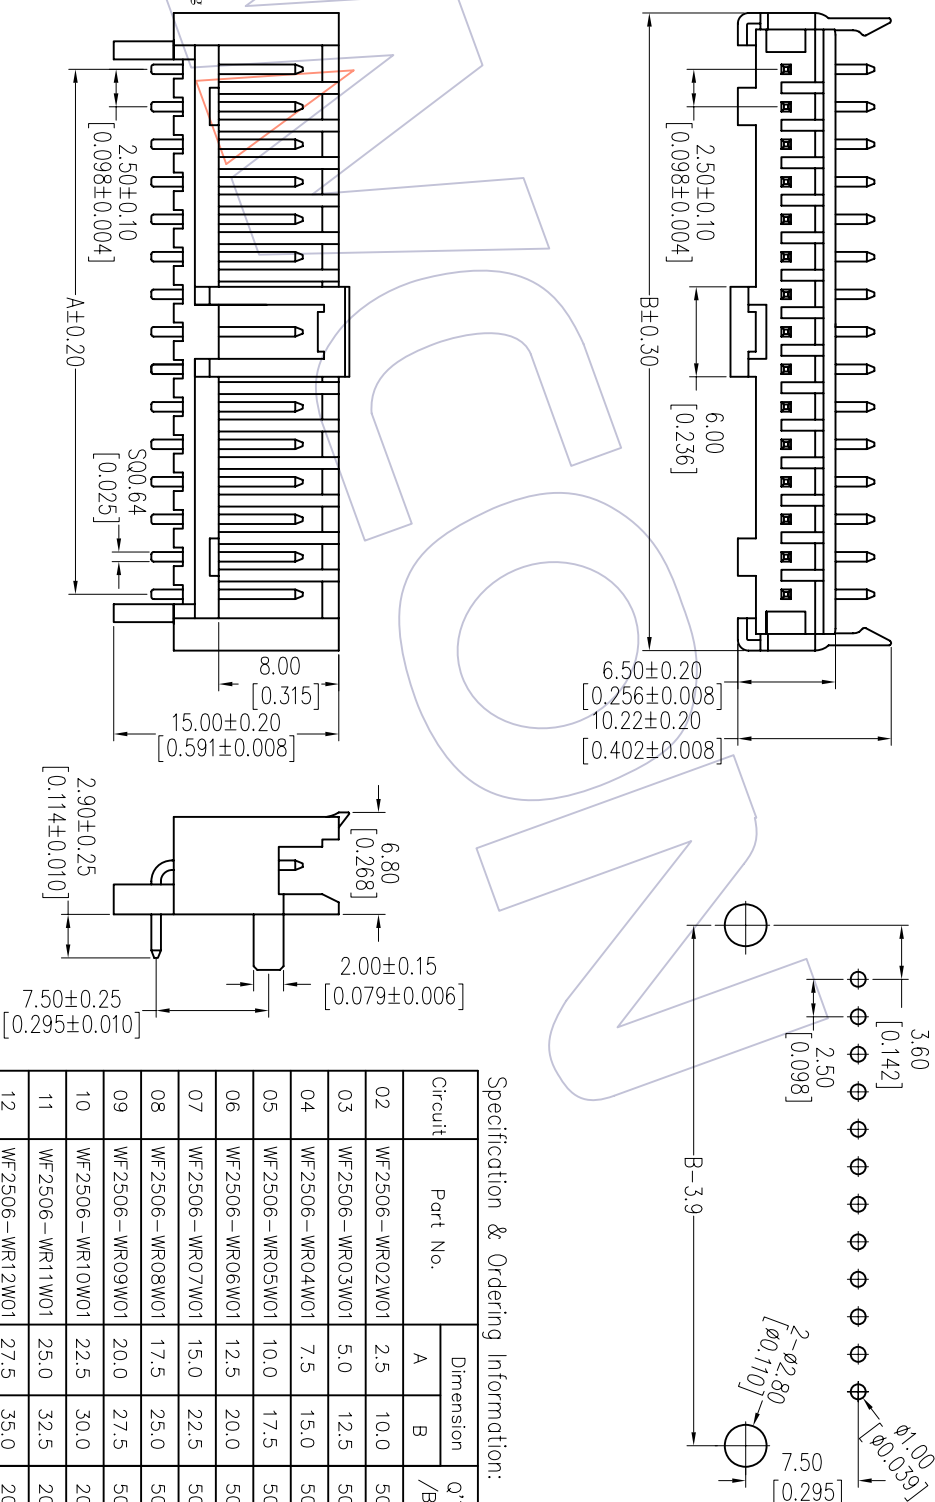

Ordering Information

WF2506 - WR XX W 0 I

No.of pins Contact Plating Color Packing
02-15P S0=Gold Flash/Tin B=Black 0= PE Bag
S3=10u"Gold/Tin F=Beige 1=Tube
S4=15u"Gold/Tin W=White T=Natural
S5=30u"Gold/Tin G0=Gold Flash
G3=10u"Gold G4=15u"Gold
G5=30u"Gold Blank=Tin

Specification & Ordering Information:

Circuit	Part No.	Dimension		Q'TY /Bag
		A	B	
02	WF2506-WR02W01	2.5	10.0	500
03	WF2506-WR03W01	5.0	12.5	500
04	WF2506-WR04W01	7.5	15.0	500
05	WF2506-WR05W01	10.0	17.5	500
06	WF2506-WR06W01	12.5	20.0	500
07	WF2506-WR07W01	15.0	22.5	500
08	WF2506-WR08W01	17.5	25.0	500
09	WF2506-WR09W01	20.0	27.5	500
10	WF2506-WR10W01	22.5	30.0	200
11	WF2506-WR11W01	25.0	32.5	200
12	WF2506-WR12W01	27.5	35.0	200
13	WF2506-WR13W01	30.0	37.5	200
14	WF2506-WR14W01	32.5	40.0	200
15	WF2506-WR15W01	35.0	42.5	200

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE		PART NO.
				XX	±0.40			UNIT	FIT	
AO	2012/08/28	NEW		XX	±0.25	JYHuang	2012/08/28	A4	1/1	SEE TAB
				X.XXX	±0.15	CHECK	DATE	SHEET		TITLE:
				Angle	± 3'	APPROVE	DATE	PROJ.		"M" TYPE 2.50 WAFBR 90°
				DIM	TOL					Customer NO.

WCON

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Http: www.wcon.com
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: sales@wcon.com