


# HSF

NOTES:  
 Rated Current:3.0A  
 Rated Voltage:125V AC/DC  
 Contact Resistance:20mΩ max  
 Withstand Voltage:800V AC/Minute  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-25°C to+85°C  
 Material:PA66 UL94V-0

## Ordering Information

WF2507 - H **XX** X 01

No.of pins  
02P~15P  
 Color  
E=Beige  
W=White  
B=Black  
N=Brown  
 Packing  
0=PE Bag

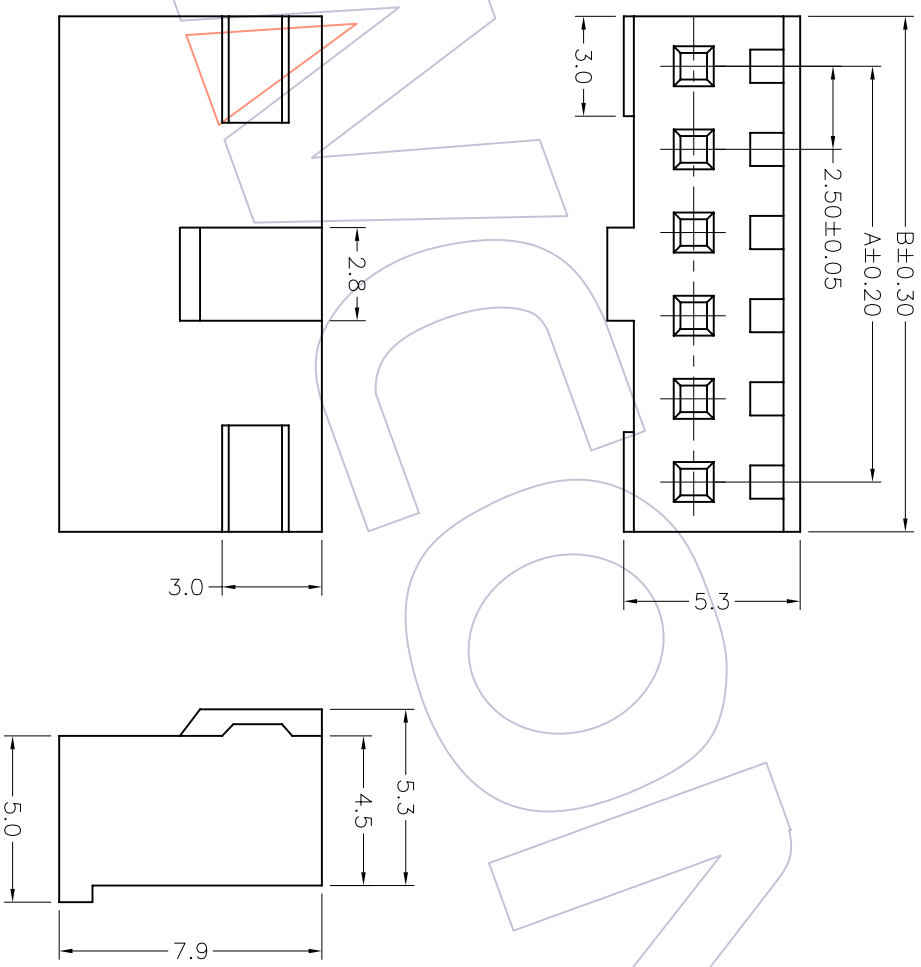

### Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
02	WF2507-H02X01	2.50	5.50
03	WF2507-H03X01	5.00	8.00
04	WF2507-H04X01	7.50	10.50
05	WF2507-H05X01	10.00	13.00
06	WF2507-H06X01	12.50	15.50
07	WF2507-H07X01	15.00	18.00
08	WF2507-H08X01	17.50	20.50
09	WF2507-H09X01	20.00	23.00
10	WF2507-H10X01	22.50	25.50
11	WF2507-H11X01	25.00	28.00
12	WF2006-H12X01	27.50	30.50
13	WF2507-H13X01	30.00	33.00
14	WF2507-H14X01	32.50	35.50
15	WF2507-H15X01	35.00	38.00

**WCON** 维峰五金电子有限公司  
 WAVE HARDWARE ELECTRONICS CO. LTD

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.
A0	08/08/04	NEW			XXX XXX XXX Angle DIM	DESIGN CHECK APPROVE	08/08/04	1:1 mm A4 1/1	SBE TAB 2.50 HOUSING