

HSF

NOTES:



Rated Current:3.0A
 Rated Voltage:125V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:800V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25°C to+85°C

Contact Material:Brass
 Contact Plating:Au or Sn over Ni
 Insulator Material:High Temperature Plastic(Ul94V-0)

Ordering Information

WF2507 - WR XX W X 1

No.of pins
02P-15P
 Color
E=Beige
W=White
B=Black
 Packing
0=PE Bag
T=Tube

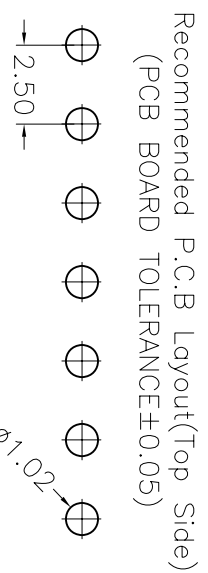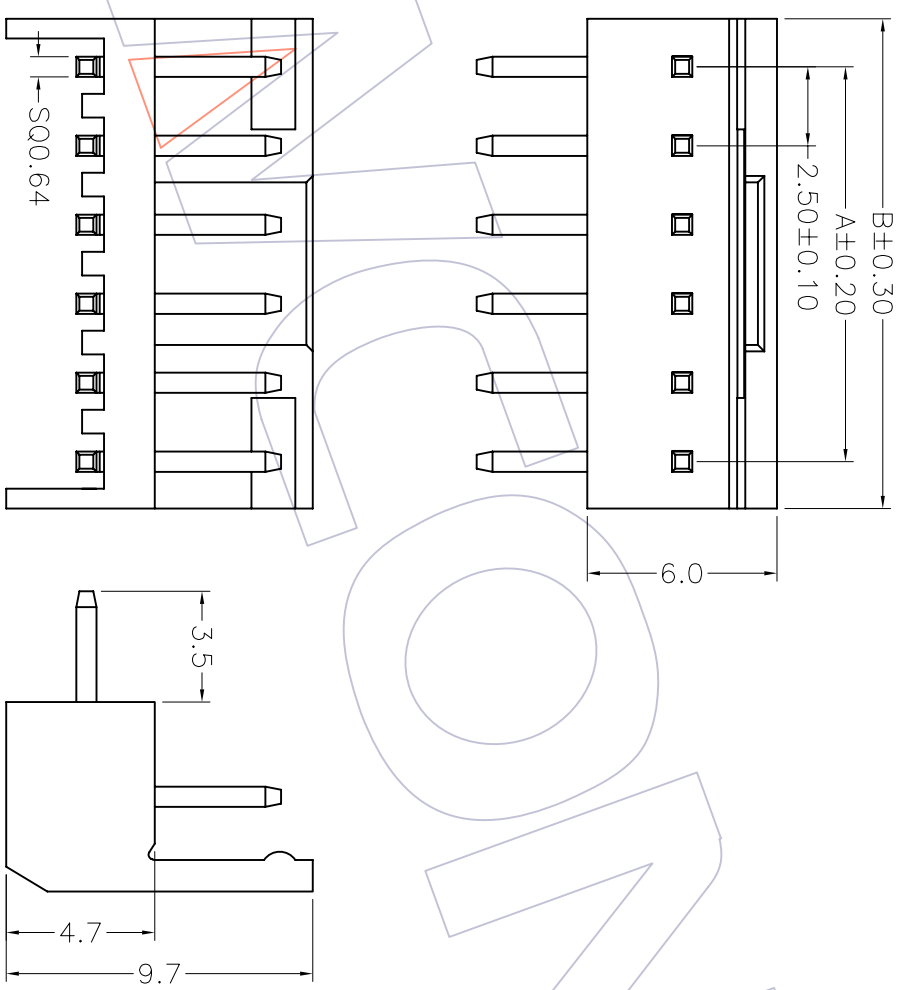

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
02	WF2507-WR02WX1	2.50	5.50
03	WF2507-WR03WX1	5.00	8.00
04	WF2507-WR04WX1	7.50	10.50
05	WF2507-WR05WX1	10.00	13.00
06	WF2507-WR06WX1	12.50	15.50
07	WF2507-WR07WX1	15.00	18.00
08	WF2507-WR08WX1	17.50	20.50
09	WF2507-WR09WX1	20.00	23.00
10	WF2507-WR10WX1	22.50	25.50
11	WF2507-WR11WX1	25.00	28.00
12	WF2507-WR12WX1	27.50	30.50
13	WF2507-WR13WX1	30.00	33.00
14	WF2507-WR14WX1	32.50	35.50
15	WF2507-WR15WX1	35.00	38.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08/08/05	SCALE		PART NO.	TITLE:
					XXX	±0.25				UNIT	1:1		
A0	08/08/05	NEW			XXX	±0.15	DESIGN			mm		SEE TAB	2.50 WAFER 90° DIP
					XXX	±0.10	CHECK						
					Angle	± 3'	APPROVE						
					DIM	TOL							

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD