


HSF

NOTES:

Rated Current:1.0A
 Rated Voltage:125V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:250V AC/Minute
 Insulation Resistance:500MΩ min
 Operation Temperature:-25°C to+85°C

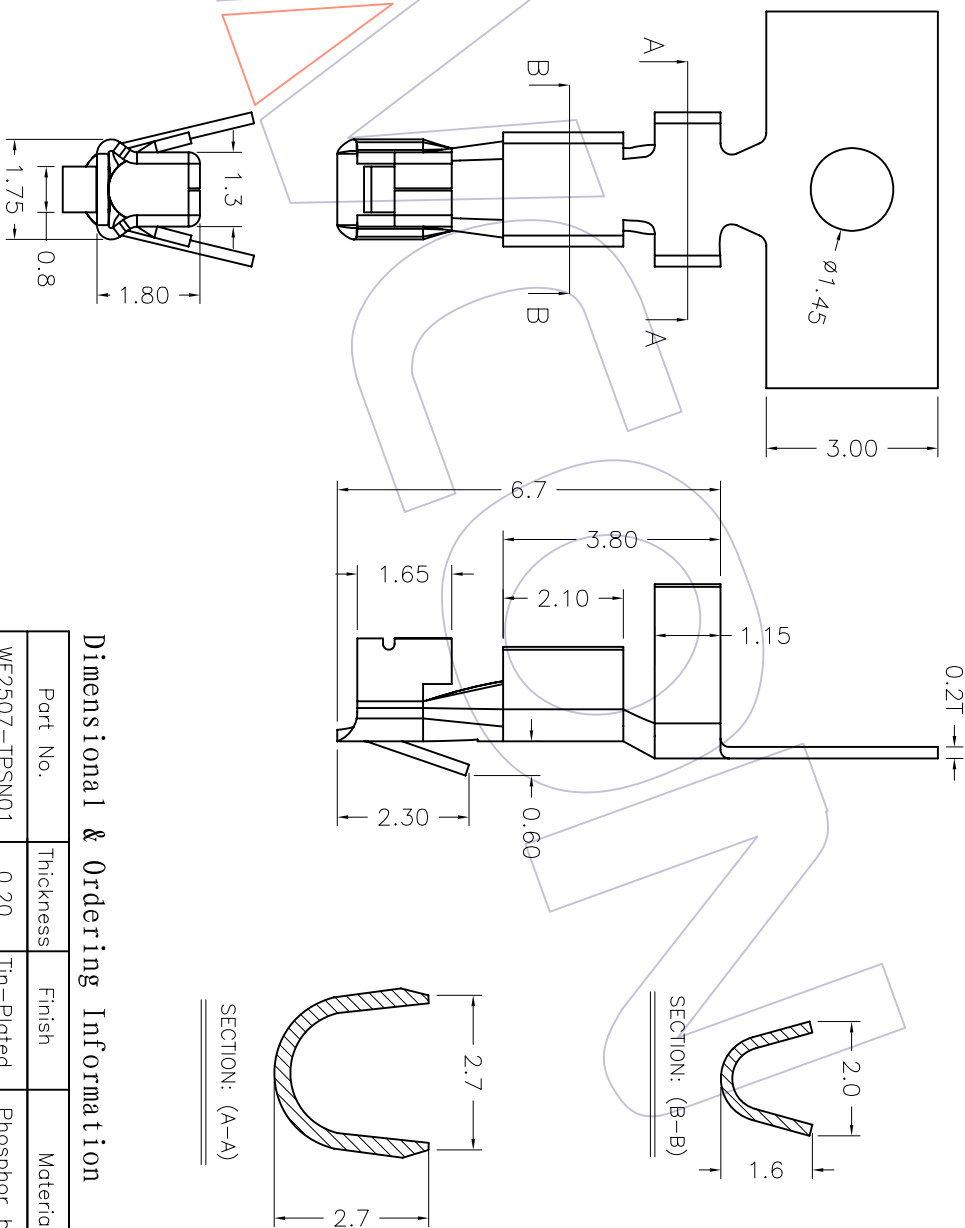

Ordering Information

WF2507 - TP XX 01

Contact Plating:
 G0=Gold Flash
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

Dimensional & Ordering Information

Part No.	Thickness	Finish	Material	Wire Range
WF2507-TPSN01	0.20	Tin-Plated	Phosphor bronze	AWG#22~#28
WF2507-TPGG001	0.20	Gold-Plated	Phosphor bronze	AWG#22~#28

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD

OPERATION	DRAW	WEIXD	SCALE	PART NO.
X.X	DESIGN	08/08/04	1:1	
X.XX	CHECK		UNIT	
X.XXX	CHECK		SIZE	
Angle	APPROVE		SHEET	
± 3'			1/1	TITLE:
DIM			PROJ.	Customer NO.
TOL				
APPROVE				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/08/04	NEW		

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----