
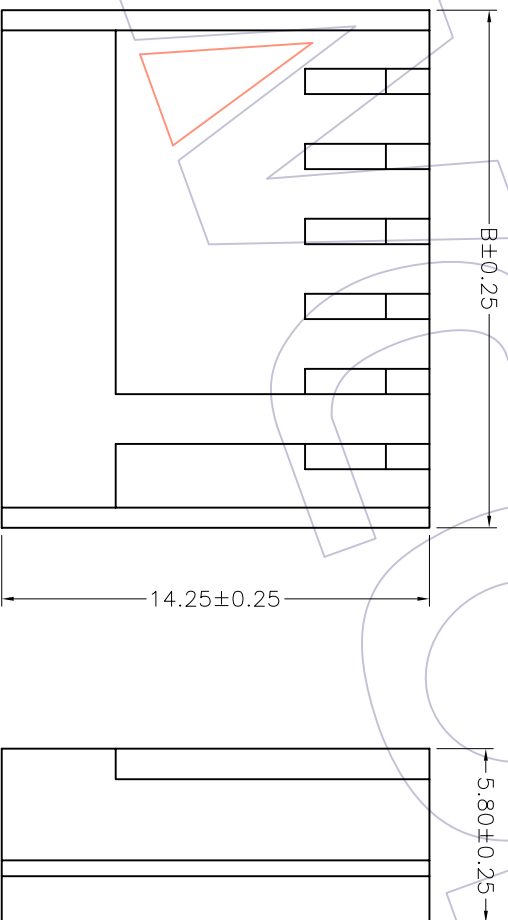


HSF

NOTES:

Rated Current:3.0A
 Rated Voltage:250V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:800V AC/Minute
 Insulation Resistance:500MΩ min
 Operation Temperature:-25°C to+85°C
 Insulator Material:High Temperature
 Plastic(UL94V-0)

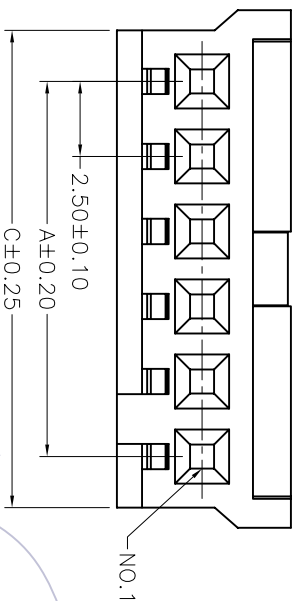

Dimensional & Ordering Information

Circuit	Part No.	Dimension		
		A	B	C
02	WF2510-H02X01	2.50	7.25	5.90
03	WF2510-H03X01	5.00	9.75	8.40
04	WF2510-H04X01	7.50	12.25	10.90
05	WF2510-H05X01	10.00	14.75	13.40
06	WF2510-H06X01	12.50	17.25	15.90
07	WF2510-H07X01	15.00	19.75	18.40
08	WF2510-H08X01	17.50	22.25	20.90
09	WF2510-H09X01	20.00	24.75	23.40
10	WF2510-H10X01	22.50	27.25	25.90
11	WF2510-H11X01	25.00	29.75	28.40
12	WF2510-H12X01	27.50	32.25	30.90
13	WF2510-H13X01	30.00	34.75	33.40
14	WF2510-H14X01	32.50	37.25	35.90
15	WF2510-H15X01	35.00	39.75	38.40

Ordering Information

WF2510-H XX X 01

No.of pins
02P-15P
Color
E=Beige
W=White
B=Black
Packing
0=PE Bag

OPERATION	XX	±0.25	DRAW	WEIXD	08/08/04	SCALE	1:1
	XXX	±0.15	DESIGN			UNIT	mm
	XXXX	±0.10	CHECK			SIZE	A4
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		SHEET	1/1
						PROJ.	Customer NO.

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

PART NO. SBE TAB
 TITLE: 2.50 HOUSING