

HSF


NOTES:

Rated Current:3.0A
Rated Voltage:250V AC/DC
Contact Resistance:20mΩ max
Withstand Voltage:800V AC/Minute
Insulation Resistance:500MΩ min
Operation Temperature:-25°C to+85°C

Ordering Information

WF2510 - TB XX 01

Contact Plating:
G0=Gold Flash
G1=3µ"Gold
G2=5µ"Gold
G3=10µ"Gold
G4=15µ"Gold
G5=30µ"Gold
S0=Gold Flash/Tin
S1=3µ"Gold/Tin
S2=5µ"Gold/Tin
S3=10µ"Gold/Tin
S4=15µ"Gold/Tin
S5=30µ"Gold/Tin
SN=Tin

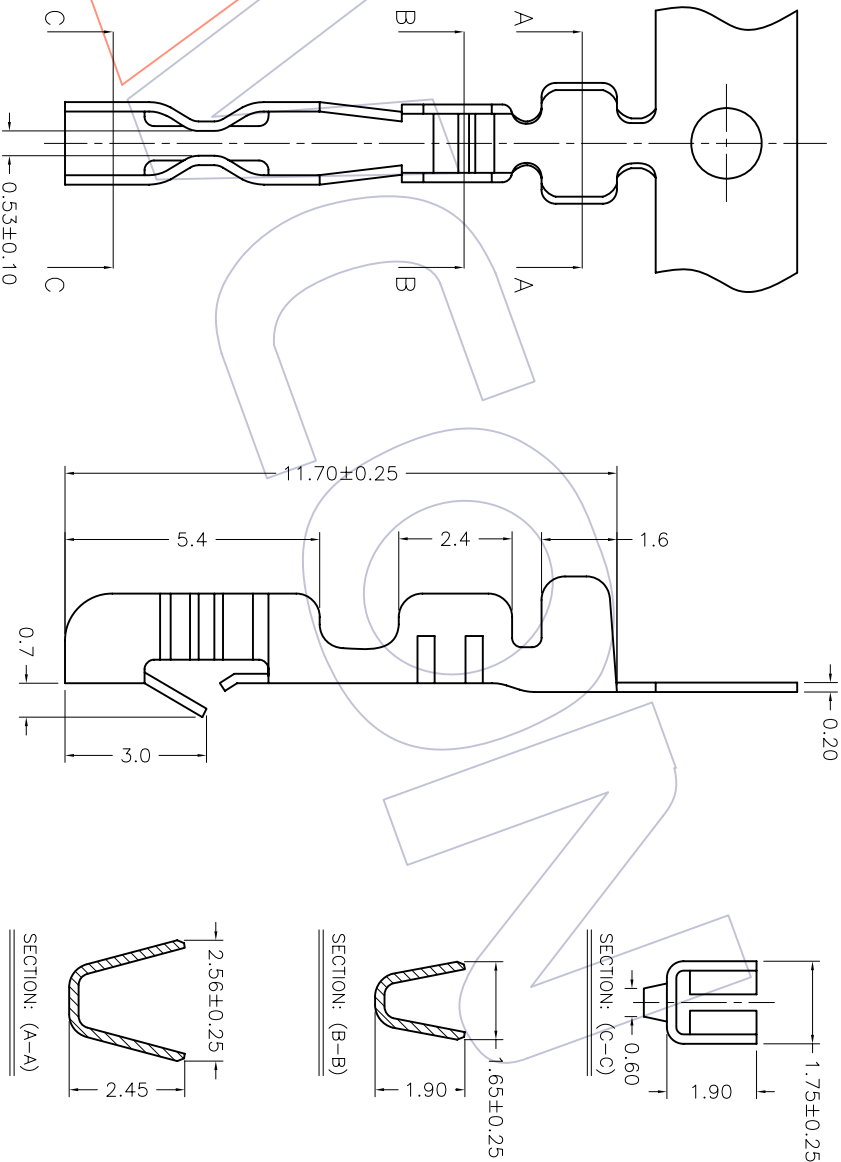

Dimensional & Ordering Information

Part No.	Thickness	Finish	Material	Wire Range	Insulation O.D	Q'ty/Reel
WF2510-TBSN01	0.20	Tin-Plated	Brass	AWG#20~#26	1.90mm(Max)	10,000pcs

OPERATION	DRAW
XXX	WEIXD
XXX	DESIGN
XXX	CHECK
Angle	CHECK
± 3'	APPROVE

OPERATION	DRAW
±0.25	WEIXD
±0.15	DESIGN
±0.10	CHECK
± 3'	APPROVE

SCALE	UNIT
1:1	mm

SHEET	SIZE
1/1	A4

PART NO.	TITLE:
	Customer NO.

SCALE	UNIT	PART NO.	TITLE:
1:1	mm		Customer NO.

WCON 维峰五金电子有限公司
WAFFER HARDWARE ELECTRONICS CO.,LTD

SBE TAB

2.50 TERMINAL

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE
A0	08/08/04	NEW			

1 2 3 4 5 6 7 8 9 10