
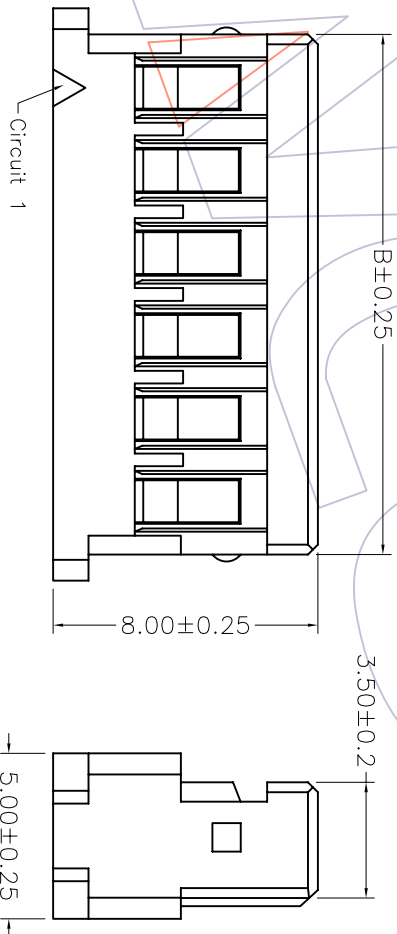


HSF

NOTES:
 Rated Current:3.0A
 Rated Voltage:250V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:800V AC/Minute
 Insulation Resistance:500MΩ min
 Operation Temperature:-25°C to+85°C
 Insulator Material:High Temperature Plastic(UL94V-0)

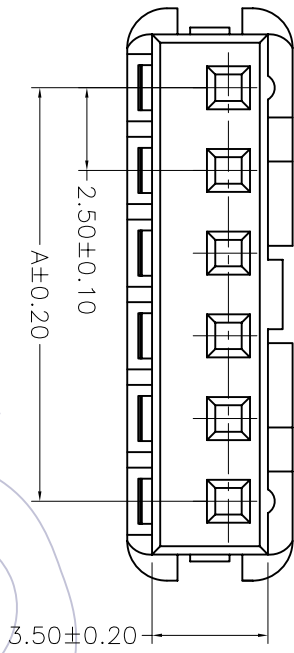

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
02	WF2511-H02X01	2.50	7.30
03	WF2511-H03X01	5.00	9.80
04	WF2511-H04X01	7.50	12.30
05	WF2511-H05X01	10.00	14.80
06	WF2511-H06X01	12.50	17.30
07	WF2511-H07X01	15.00	19.80
08	WF2511-H08X01	17.50	22.30
09	WF2511-H09X01	20.00	24.80
10	WF2511-H10X01	22.50	27.30
11	WF2511-H11X01	25.00	29.80
12	WF2511-H12X01	27.50	32.30
13	WF2511-H13X01	30.00	34.80
14	WF2511-H14X01	32.50	37.30
15	WF2511-H15X01	35.00	39.80

Ordering Information

WF2511-H XX X 01

No of pins
02P-15P
Color
E=Beige
W=White
B=Black
Packing
0=PE Bag

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

PART NO. SBE TAB
 TITLE: 2.50 HOUSING

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08/08/04	SCALE		PART NO.	SBE TAB
					Angle	TOL				UNIT	mm		
A0	08/08/04	NEW			XXX	±0.25	DESIGN			A4			
					XXXX	±0.15	CHECK			1/1			
					DM	± .3'	APPROVE						

H
G
F
E
D
C
B
A

1 2 3 4 5 6 7 8 9 10