
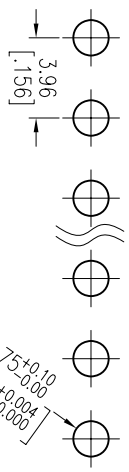


HSF

NOTES:

Rated Current:5.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-25℃ to +85℃

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA46+30%G.F UL94V-0 BK


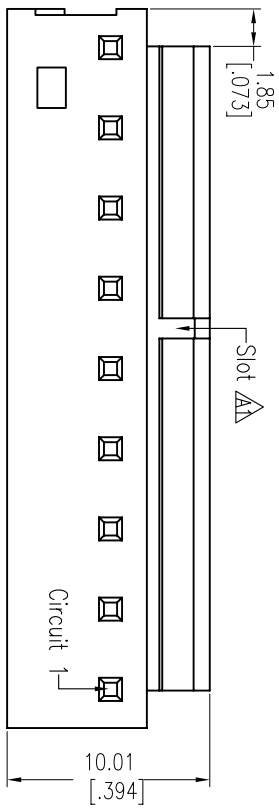


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

WF3965 -WS XX X 0 1

No. of pins Contact Plating Color Packing
 02-18P S0=Gold Flash/Tin B=Black O=PE Bag
 S3=10u/Gold/Tin E=Beige
 S4=15u/Gold/Tin F=Natural
 S5=30u/Gold/Tin W=White
 G0=Gold Flash
 G3=10u/Gold
 G4=15u/Gold
 G5=30u/Gold
 Blank=Tin
 H=P=PA46
 Blank=PA66

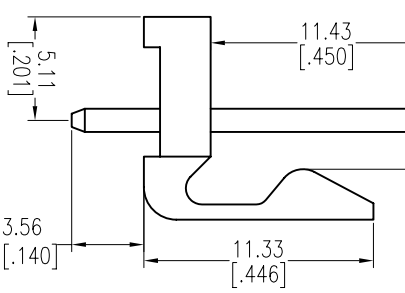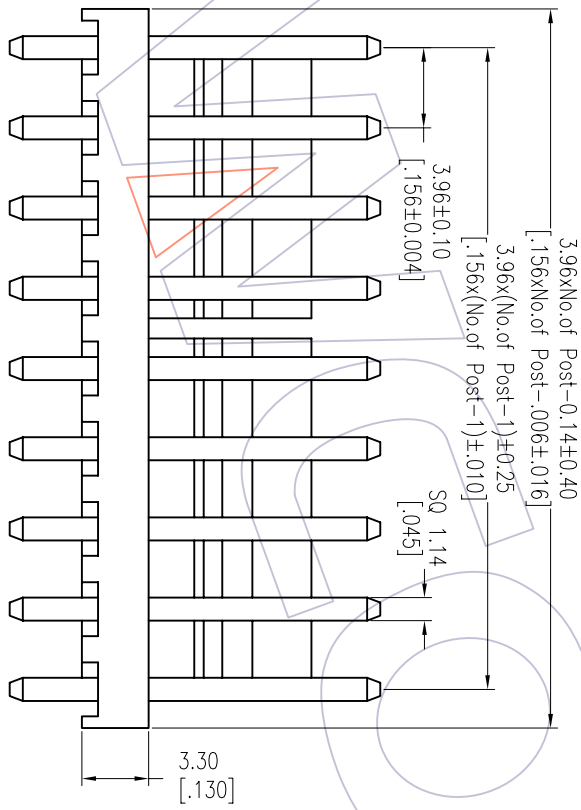

Circuit	Slot
2P	None
3P	None
4P	None
5P	None
6P	Between Circuit3&4P
7P	Between Circuit4&5P
8P	
9P	Between Circuit5&6P
10P	
11P	Between Circuit6&7P
12P	Between Circuit4&5P, 8&9P
13P	Between Circuit4&5P, 9&10P
14P	Between Circuit5&6P, 9&10P
15P	Between Circuit5&6P, 10&11P
16P	Between Circuit5&6P, 11&12P
17P	Between Circuit6&7P, 11&12P
18P	Between Circuit6&7P, 12&13P

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2013/01/15	Modify Drawing	-----
A0	2012/09/17	NEW	-----

OPERATION	SCALE	PART NO.
XX	mm [inch]	WF3965-WSXXX01
DATE	DATE	TITLE:
2013.01.15	2013.01.15	3.96mm WAFER 180° DIP
CHECK	CHECK	CUSTOMER NO.
XX XX	XX XX	
Angle	APPROVE	
± 3'	DATE	
TOL	PROJ.	

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com