

HSF


NOTES:

Rated Current: 2.0A
Rated Voltage: 250V AC/DC
Contact Resistance: 20mΩ max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 1000MΩ min
Operation Temperature: -25°C to +85°C
Material: Phosphor Bronze

Ordering Information

WF2003 - TP XX 01

Contact Plating:
G0=Gold Flash
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold
S0=Gold Flash/Tin
S3=10μ"Gold/Tin
S4=15μ"Gold/Tin
S5=30μ"Gold/Tin
SN=Tin

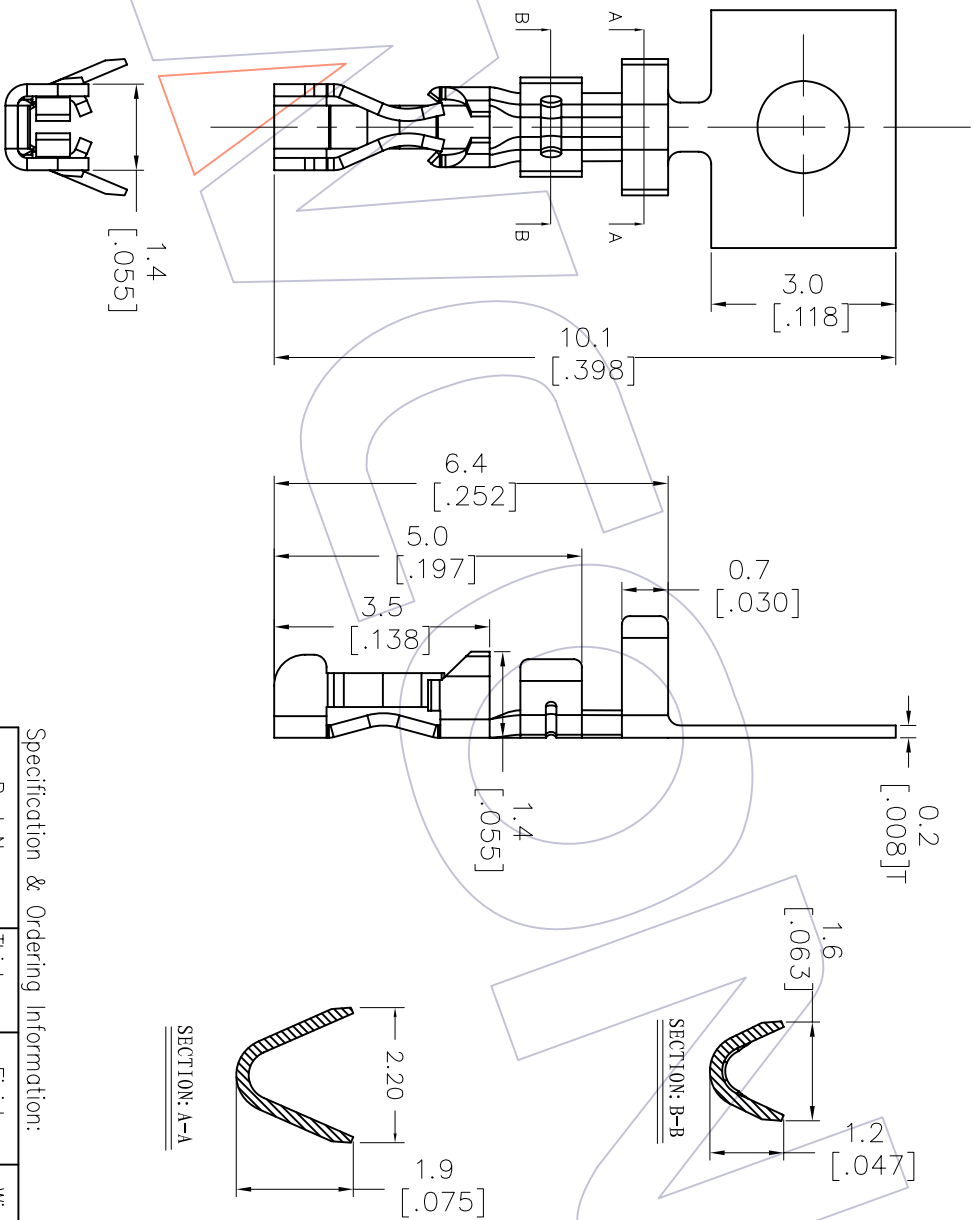

Specification & Ordering Information:

Part No.	Thickness	Finish	Wire Range	Insulation O.D.
WF2003-TPSN01	0.20	Tin-Plated	AWG#24~#30	1.40mm(Max.)
WF2003-TPGX01	0.20	Gold-Plated	AWG#24~#30	1.40mm(Max.)

PART NO. SEE TAB

TITLE:

2. 00 TERMINAL

CUSTOMER NO.

WCON

Http: www.wcon.com

WCON-Dongguan

WCON-Kunshan

Tel: +86 769 85358920

Tel: +86 512 57468408

Fax: +86 769 85358915

Fax: +86 512 57468468

E-mail: sales@wcon.com

E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT
XX	JYHuang	2012/09/05	UNIT	mm
X.XX	CHECK	DATE	SIZE	A4
X.XXX	APPROVE	DATE	SHEET	1/1
Angle	PROJ.			
± 3'				
± 0.15				
± 0.25				
± 0.40				

CHANGE	DESCRIPTION

REV	DATE	MODIFICATION DESCRIPTION
AO	2012/09/05	NEW